

TECHNICAL MANUAL

ARMY EQUIPMENT DATA SHEETS

CHEMICAL

DEFENSE EQUIPMENT

This copy is a reprint which includes current
pages from Changes 1 through 4.

HEADQUARTERS, DEPARTMENT OF THE ARMY

12 MAY 1982

CHANGE
NO. 4

HEADQUARTERS
DEPARTMENT OF THE ARMY
WASHINGTON, DC, 30 September 1991

ARMY EQUIPMENT DATA SHEETS
CHEMICAL WEAPONS AND MUNITIONS

TM 43-0001-26-1, 29 April 1982, and Changes 1, 2, and 3 are changed as follows:

1. The purpose of this change is to update information.
2. New or changed material is indicated by a vertical bar in the margin of the page. Illustration changes are indicated by pointing hand symbols.
3. Remove old pages and insert new pages as indicated below.

Remove Pages

1-3 and 14
1-11 thru 1-12.1
2-1/(2-2 blank)
2-11 and 2-12
2-23 and 2-24
2-25 and 2-26
2-29 thru 2-32
2-33 thru 2-40
3-1/(3-2 blank)
None
3-5 and 3-6
None
3-7 and 3-8
3-13 and 3-14
3-17 and 3-18
4-1/(4-2 blank)
None
4-10.1 and 4-10.2
4-11/(4-12 blank)
4-16.1 and 4-16.2
4-17/(4-18 blank)
5-5/(5-6 blank)
7-11 and 7-12
7-15 and 7-16
8-3/(8-4 blank)
A-1/(A-2 blank)
Index 1 and Index 2

Insert Pages

1-3 and 1-4
1-11 thru 1-12.1 (1-12.2 blank)
2-1/(2-2 blank)
None
2-23 thru 2-24.4
2-25 thru 2-28
2-29 thru 2-32
None
3-1/(3-2 blank)
3-4.1 thru 3-4.19/(3-4.20 blank)
3-5 and 3-6
3-6.3 thru 3-6.6
3-7 thru 3-8.6
3-13 and 3-14
3-17 thru 3-18.2
4-1/(4-2 blank)
4-8.5 and 4-8.6
4-10.1 and 4-10.2
4-11 thru 4-12.2
4-16.1 and 4-16.2
None
5-5/(5-6 blank)
7-11 and 7-12
7-15 and 7-16
8-3/(8-4 blank)
A-1/(A-2 blank)
Index 1 thru Index 3/(Index 4 blank)

4. File this change sheet in front of publication for reference purposes.

By order of the Secretary of the Army:

GORDON R. SULLIVAN
General, United States Army
Chief of Staff

Official:

THOMAS F. SIKORA
Brigadier General, United States Army
The Adjutant General

Distribution:

To be distributed in accordance with DA Form 12-MB, requirements for Army Equipment Data Sheets - Chemical Weapons and Munitions.

CHANGE }
NO. 3 }

HEADQUARTERS
DEPARTMENT OF THE ARMY
WASHINGTON, DC, 1 November 1988

ARMY EQUIPMENT DATA SHEETS
CHEMICAL DEFENSE EQUIPMENT

TM 43-0001-26-1, 12 May 1982, is changed as follows:

1. New or changed material is indicated by a vertical bar in the margin of the page.
2. Added or revised illustrations are indicated by a vertical adjacent to the illustration.
3. Remove old pages and insert new pages as indicated below.

Remove pages

1-1 (1-2 blank)
None
1-13 thru 1-14.2
2-1 (2-2 blank)
2-23 thru 2-28
2-31 and 2-32
3-1 (3-2 blank)
None
4-1 (4-2 blank)
None
None
None
8-1 (8-2 blank)
8-5 and 8-6
A-1(A-2 blank)
Index 1 and Index 2

Insert pages

1-1(1 -2 blank)
1-12.1 (1-12.2 blank) (1-13 and 1-14 deleted)
1-14.1 and 1-14.2
2-1 (2-2 blank)
2-23 thru 2-26 (2-27 and 2-28 deleted)
2-31 and 2-32
3-1 (3-2 blank)
3-6.1 and 3-6.2
4-1 (4-2 blank)
4-8.3 and 4-8.4
4-10.1 and 4-10.2
4-16.1 and 4-16.2
8-1 (8-2 blank)
(8-5 and 8-6 deleted) 8-6.1 thru 8-6.3(8-6.4 blank)
A-1(A-2 blank)
Index 1 and Index 2

4. File this change sheet and previous change sheets in back of the publication for reference purposes.

By Order of the Secretary of the Army:

CARL E. VUONO
General, United States Army
Chief of Staff

Official:

WILLIAM J. MEEHAN II
Brigadier General, United States Army
The Adjutant General

Distribution:

To be distributed in accordance with DA Form 12-34, requirements for Army Equipment Data Sheets-Chemical Defense Equipment.

CHANGE }
NO.2 }

HEADQUARTERS
DEPARTMENT OF THE ARMY
Washington, DC, 30 December 1985

ARMY EQUIPMENT DATA SHEETS
CHEMICAL DEFENSE EQUIPMENT

TM 43-0001-26-1, 12 May 1982, is changed as follows:

1. New or changed material is indicated by a vertical bar in the margin of the page.
2. Added or revised illustrations are indicated by a vertical bar adjacent to the illustration.
3. Remove old pages and insert new pages as indicated below.

Remove pages

i and ii
1-1(1-2 blank)
1-3 thru 1-6
None
1-17(1-18 missing)
1-21(1-22 blank)
1-29(1-30 blank)
2-1(2-2 blank)
2-7 and 2-8
2-1 5(2-16 blank)
2-19(2-20 blank)
2-25 and 2-26
2-38.1 and 2-38.2
2-39(2-40 blank)
2-45(2-46 blank)
3-5 thru 3-8
3-15 thru 3-18
4-1(4-2 blank)
4-7 and 4-8

4-1 1(4-12 blank)
4-17(4-1 8 blank)
6-1(6-2 blank)
6-5 thru 6-8
6-11 and 6-12
7-5(7-6 blank)
7-8.1 (7-8.2 blank)
7-9(7-1 O blank)
7-12.1 (7-12 .2 blank)
8-3(8-4 blank)
8-7(8-8 blank)
A-1(A-2 blank)
Glossary 1 and Glossary 2
Index 1 and Index 2
Sample DA Form 2028-2
DA Form 202&2

Insert pages

i and ii
1-1(1-2 blank)
1-3 thru 1-6
1-14.1 and 1-14.2
1-17andI-18
1-21(1-22 blank)
1-29(1 -30 blank)
2-1(2-2 blank)
2-7 and 2-8
2-1 5(2-16 blank)
2-1 9(2-20 blank)
2-25 and 2-26
None
2-39 and 2-40
2-45(2-46 blank)
3-5 thru 3-8
3-15 thru 3-18
4-1(4-2 blank)
4-7 and 4-8
4-8.1 and 4-8.2
4-1 1(4-12 blank)
4-1 7(4-1 8 blank)
6-1(6-2 blank)

None
7-5(7-6 blank)
7-8.1 (7-8.2 blank)
7-9(7-10 blank)
7-12.1 (7-12.2 blank)
8-3(8-4 blank)
8-7(8-8 blank)
A-1(A-2 blank)
Glossary 1 and Glossary 2
Index 1 and Index 2
Sample DA Form 2028-2
DA Form-2028-2

4. File this change sheet andi previous change sheet in back of the publication for reference purposes.

By Order of the Secretary of the Army:

JOHN A. WICKHAM, JR.
General, United States Army
Chief of Staff

Official:

R.L. DILWORTH
Brigadier General, United States Army
The Adjutant General

Distribution:

To be distributed in accordance with DA Form 12-34B, requirements for Army Equipment Data Sheets-Chemical Defense Equipment.

CHANGE }
NO. 1 }

HEADQUARTERS
DEPARTMENT OF THE ARMY
Washington, DC, 27 May 1983

ARMY EQUIPMENT DATA SHEETS
CHEMICAL DEFENSE EQUIPMENT

TM 43-0001-26-1, 12 May 1982, is changed as follows:

1. New or changed material is indicated by a vertical bar in the margin of the page.
2. Added or revised illustrations are indicated by a vertical bar adjacent to the illustration.
3. Remove old pages and insert new pages as indicated below.

Remove pages

i and ii
1-1 (1-2 blank)
1-3 thru 1-6
None
1-17(1-18 blank)
1-31 (1-32 blank)
2-1 (2-2 blank)
2-13 and 2-14
None
4-1 (4-2 blank)
4-1 1(4-1 2 blank)
7-1 (7-2 blank)
None
None
None
8-1 (8-2 blank)
8-3(8-4 blank)
8-7(8-8 blank)
None
Glossary 1 and Glossary 2
Index 1 and Index 2

Insert pages

i and ii
1-1 (1-2 blank)
1-3 thru 1-6
1-16.1 (1-16.2 blank)
1-17 and 1-18
1-31 (1-32 blank)
2-1 (2-2 blank)
2-13 and 2-14
2-38.1 and 2-38.2
4-1 (4-2 blank)
4-11(4-12 blank)
7-1 (7-2 blank)
7-8.1 (7-8.2 blank)
7-12.1 (7-12.2 blank)
7-15 and 7-16
8-1 (8-2 blank)
8-3(8-4 blank)
8-7(8-8 blank)
A-1 (A-2 blank)
Glossary 1 and Glossary 2
Index 1 and Index 2

4. File this change sheet in front of the publication for reference purposes.

By Order of the Secretary of the Army:

E. C. MEYER
General United States Army
chief of staff

Official:

ROBERT M. JOYCE
Major General United States Army
The Adjutant General

DISTRIBUTION:

To be distributed in accordance with DA Form 12-28, requirements for General Information applicable to all Organizations which have a Chemical Mission.

*U.S. Government Printing Office: 1993 — 342-421/62664

WARNING

Do not use these data sheets as operating instructions. Serious injury or death could result from misuse of this data. Consult your operator's manual for instructions on how to operate this equipment.

FIRST AID

For first aid information, consult FM 21-11.

TECHNICAL MANUAL

NO. 43-0001-26-1

HEADQUARTERS
DEPARTMENT OF THE ARMY
Washington, DC, 12 May 1982

ARMY EQUIPMENT DATA SHEETS
CHEMICAL DEFENSE EQUIPMENT

NOTE: This manual is printed in two volumes, **as follows:**

TM 43-0001-26-1, CHEMICAL DEFENSE EQUIPMENT

TM 43-0001-26-2, CHEMICAL WEAPONS AND MUNITIONS

REPORTING ERRORS AND RECOMMENDING IMPROVEMENTS

You can help improve this manual. If you find any mistakes or if you know of a way to improve the procedures, please let us know. Mail your letter, DA Form 2028 (Recommended Changes to Publications and Blank Forms), or DA Form 2028-2, located in the back of the manual direct to: Commander, US Army Armament, Munitions and Chemical Command, ATTN: AMSMC-MAR-T (A), Aberdeen Proving Ground, MD 21010-5423. A reply will be furnished directly to you.

TABLE OF CONTENTS

	Page
Introduction	ii
CHAPTER 1. Detection and Warning	1-1
2. Individual Protection	2-1
3. Collective Protection	3-1
4. Decontamination and Impregnation	4-1
5. Hazard Calculation	5-1
6. Radioactive Sources	8-1
7. Maintenance and Repair	7-1
8. Training	8-1
APPENDIX A. Deleted Items	A-1
GLOSSARY	Glossary-1
INDEX	Index-1

*This manual, together with TM 43-0001-28-2, supersedes TM 750-5-15, 2 AUG 72, and all changes.

INTRODUCTION

Purpose. This manual is a reference handbook published as an aid in training, familiarization, and identification of chemical defense equipment. This manual is


not authorization for requisition, stockage, maintenance, or issue of the materiel described herein.

CHAPTER 1

DETECTION AND WARNING

	Page
Alarm, Chemical Agent, Automatic: Portable, Manpack, M8 and M8A1	1-3
Alarm Unit, Chemical Agent, Automatic: M42,	1-5
Detector Kit, Carbon Monoxide, Calorimetric: M23	1-7
Detector Kit, Chemical Agent: ABC-M18A2	1-9
Detector Kit, Chemical Agent: M256	1-11
Detector Kit, Chemical Agent: M256A1	1-12.1
Laboratory, Chemical Base: M2 and 2A1 (Deleted)	1-13
Marking Set, Contamination: Nuclear, Biological, Chemical (NBC)	1-14.1
Paper, Chemical Agent Detector: VGH, ABC-M8	1-15
Paper, Chemical Agent Detector: M9	1-16.1
Power Supply, Chemical Agent, Automatic Alarm: M10 and M10A1	1-17
Refill Kit, Analyzing Components, CBR Agents Sampling and Analyzing Kit: M33	1-19
Refill Kit, Chemical Agent Automatic Alarm: M229	1-21
Refill Kit, Chemical Agent Detector: VG Components, ABC-M30A1	1-23
Sampling and Analyzing Kit, CBR Agent: M19	1-25
Sampling Kit, CBR Agent: M34	1-27
Water Testing Kit, Chemical Agents: M272	1-29
Winterization Kit, Automatic Chemical Agent Alarm: M253	1-31

ALARM, CHEMICAL AGENT, AUTOMATIC: PORTABLE, MANPACK, M8 AND M8A1

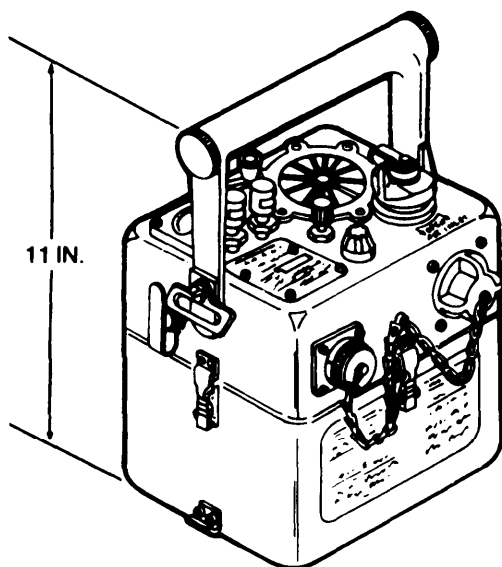

M43/M43A1 DETECTOR UNIT

Type Classification:

M8A1 STD (LCC-A); MSR 02816012
 M8 STD(LCC-B); MSR 02816012


Use:

To detect very low concentrations of toxic nerve agent vapors or inhalable aerosols and automatically signal the presence of the chemical agent in the air,

Description:

a. The M8 or M8A1 alarm is a portable, point-sampling chemical agent alarm that can be hand-carried, backpacked, or mounted on a tactical vehicle. The M8 alarm consists of an M43 detector unit and an M42 alarm unit. The M8A1 alarm consists of an M43A1 detector unit and an M42 alarm unit.

b. The M43 or M43A1 detector unit consists of a top case assembly, a cell module, an electronics module, a pump assembly or module, and a bottom case. The cases are fiberglass. The top case has a molded, upright carrying handle. A flowmeter and rainshield are stored inside the handle. The top case assembly contains all controls and indicators. The cell module contains the detector cell and associated electronics. The electronics module contains the alarm circuit, the temperature control amplifier, and voltage regulator. The pump assembly or module contains an electric motor-driven pump. The bottom case protects detector components and contains heaters in its walls. It has hooks for attaching a BA3517/U battery,

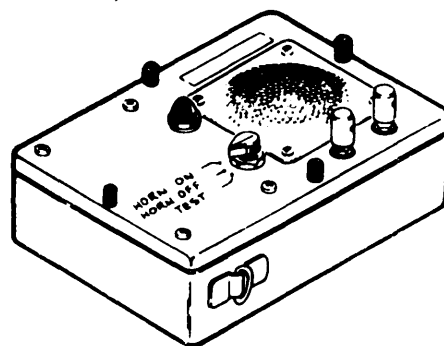

M42 ALARM UNIT

c. The M42 alarm unit consists of a metal housing and panel assembly. The panel top contains the alarm loudspeaker, alarm lamp, trigger signal input terminals, and the operation-mode selector switch. The alarm horn electronic circuitry and BA3030/U batteries for powering the horn are mounted under the panel.

d. Accessories for operating and mounting the alarms are issued separately. The accessories include the following items: M229 refill kit for M8 alarm, M273 maintenance kit for M8A1 alarm, BA3517/U battery, BA3030/U batteries, M253 winterization kit, M10 and M10A1 power supplies, MI 82 low profile mount, M226 high profile mount, and vehicle installation kits.

Differences Between Models:

The M43 detector unit for the M8 alarm uses electrolyte solution passing through an electrochemical cell for detection. The M43A1 detector unit for the M8A1 alarm uses an alpha radiation source for this purpose.

Functioning:

a. Power to operate the detector unit is supplied from a 36 Vdc BA3517/U battery; from a 24 Vdc BB501/U battery; through an M10 or M10A1 power supply, which converts 110/220 Vac to 27 ± 3 Vdc; or from the vehicle on which it is mounted.

b. Before and during operation, the M43 or M43A1 detector unit is serviced with components from the M229 refill kit or M273 maintenance kit respectively.

c. The M43 detector unit pump assembly draws air samples into the detector unit. The air is heated if cold, filtered, and passed through the cell module. The pump assembly also pumps electrolyte solution from a reservoir and mixes the solution with the sampled air. An electrical charge in the cell module will cause the chemical agent ions to cluster. The presence of the chemical agents in the air-solution mixture causes a sharp increase in the electrical output of the cell. The electronic module monitors this output and senses any voltage change. A change sets off the horn.

d. The M43A1 detector unit pump module draws air samples into the detector unit. The air is heated if cold, filtered, and passed through the cell module. When a contaminated air sample passes over the alpha (americium 241) radiation source, it causes the chemical agent ions to cluster. The air moves through a geometrically configured cell which collects the clusters in the form of an electric current. The electronic module monitors the electrical output and senses any voltage change. A change sets off the horn.

e. The M42 alarm unit is connected to the M43 or M43A1 detector unit by WD-1 field wire when a warning capability remote from the detector unit is desired. Electronic circuitry in the M42 alarm unit converts the dc triggering signal received from the detector unit into pulsating signals, which actuate the horn and indicator lamp.

Tabulated Data:

NSN:

M86665-00-935-6955

M8A16665-01-105-5623

Line item number

M8A32060

M8A1A32355

Unit of issue Each

Basis of issue.....TOE/MTOE;
AR310-34

M43/M43A1 detector unit:

Weight:

M43 (serviced).....6.50 lb

M43A17.00 lb

Length.....7.00 in.

Width.....7.75 in.

Height 10.75 in.

M42 alarm unit:

Weight4 lb (with batteries)

Length.....8.00 in.

Width.....6.00 in.

Height6.00 in.

Performance:

Chemical agents detected:

M8 alarm AC, CG, CK, CX
GA, GB, GD, and
VX vapors

M8A1 alarm. GA, GB, GD and
VX vapors

Shipping and Storage Data:

Type pack 0 Wooden Box

Dimensions 16.6 x11.1 x15.1 in.

Weight 44 lb

Cube. 1.6 cu ft

Storage temperatureFrom -65°F to 160°F

M8 alarm:

Type storage.....Warehouse

Drawing number.....DL 5-15-8803

M8A1 alarm:

DOT hazard classification Radio-
active material

DOT shipping name Radioactive
material limited quantity NOS

Type storage. AR 385-30

Drawing number..... 5-15-8800

References:

SB 740-94-3

TB-3-6665-260-50

TB 3-6665-317-35

TM 3-6665-225-12

TM 3-66&260-14

TM 3-6665-260-24P

TM 3-6665-261-14

TM 3-6665-261-24P

TM 3-6665-273-20

TM 3-6665-274-20

TM 3-6665-302-20P



TM 3-6665-302-34

TM 3-6665-302-34P

TM 3-6665-312-12&P

TM 3-6665-312-30&P

TM 43-0002-31

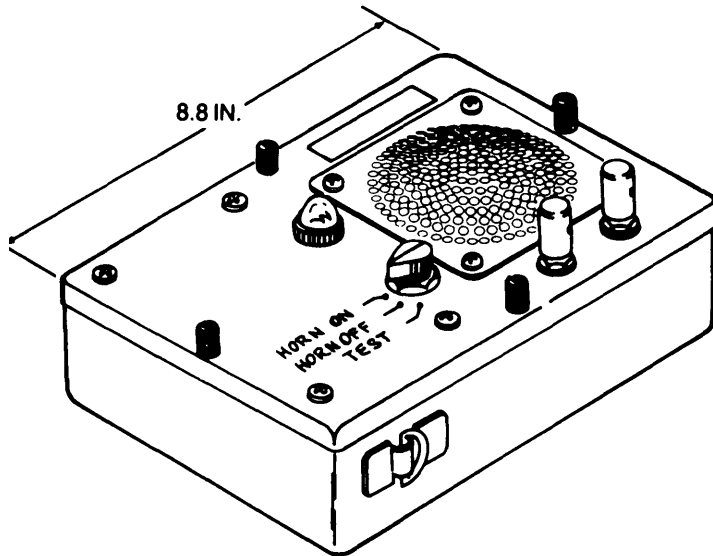ALARM UNIT, CHEMICAL AGENT, AUTOMATIC ALARM: M42**M42 ALARM UNIT****FOUR BA3030
BATTERIES***Type Classification:*

STD (LCC-A); AMCTC 659869

Use:

To provide a remote warning capability for the M43 and M43A1 portable automatic chemical agent alarm detector unit to automatically signal the presence of chemical agent vapors or inhalable aerosols. An M42 alarm unit is issued as a component of each M8 or M8A1 automatic chemical agent alarm. To augment the remote warning capability of each detector unit, additional M42 alarm units maybe authorized and issued by line item number.

Description:

The M42 alarm unit consists of a metal housing and panel assembly. The panel top contains the alarm loud speaker, alarm lamp, trigger signal input terminals, and the operation-mode selector switch. The alarm horn circuitry and four BA3030/U batteries are mounted on the underside of the panel. A plug-in printed circuit board contains most of the required electronic components.

Functioning:

a. The M42 alarm unit is connected to the M43 or M43A1 detector unit by WD-1 field wire when a warning capability remote from the location of the point source is

desired. The M42 alarm unit can be used at distances up to 400 meters from the M43 or M43A1 detector unit. Five M42 alarm units can be used simultaneously from one detector unit. Each M42 unit uses four BA3030/U batteries for power. A three-position mode selector switch allows selection of the "HORN ON," "HORN OFF," and "TEST" functions. The electronic circuitry in the M42 alarm unit converts the dc triggering signal received from detector unit into pulsating audiofrequency signals, which drive the remote alarm loudspeaker (horn) and actuate the indicator lamp.

b. To operate the M42 alarm unit from a vehicle, a mounting bracket is provided with the M228 or M182 mounting kit authorized for the particular vehicle.

Tabulated Data:

NSN	6665-00-859-2215
Line item number	A33120
Unit of issue	Each
Basis of issue	TOE/MTOE; AR 310-34
M42 alarm unit:	
Weight	4lb (with batteries)
Length	8.8 in.
Width	6.0 in.
Height	3.0 in.

Performance:

Operating temperature From -40°F to 120°F
BA3030/U batteries D size 1/2 volt dry
batteries (four each)

Shipping and Storage Data:


Type pack Woden box
Quantity of items in pack 1 each
Dimensions 10.75 x 8 x 6 in.
Weight 6.85 lb
cube 0.36 Cu ft
Type storage Warehouse
Storage temperature From -65°F to 160°F
Drawing number DL 5-15-4626

TB 3-6665-94-3
TM 3-6665-225-12
TM 3-6665-260-14
TM 3-6665-260-24P
TM 3-6665-261-14
TM 3-6665-261-24P
TM 3-6665-273-20
TM 3-6665-274-20
TM 3-6665-302-20P
TM 3-6665-302-34
TM 3-6665-302-34P
TM 3-6665-312-12&P
TM 3-6665-312-30&P
TM 43-0002-31

References:

FM 21-40
FM 21-46
SB 740-94-3

DETECTOR KIT, CARBON MONOXIDE, COLORIMETRIC: M23

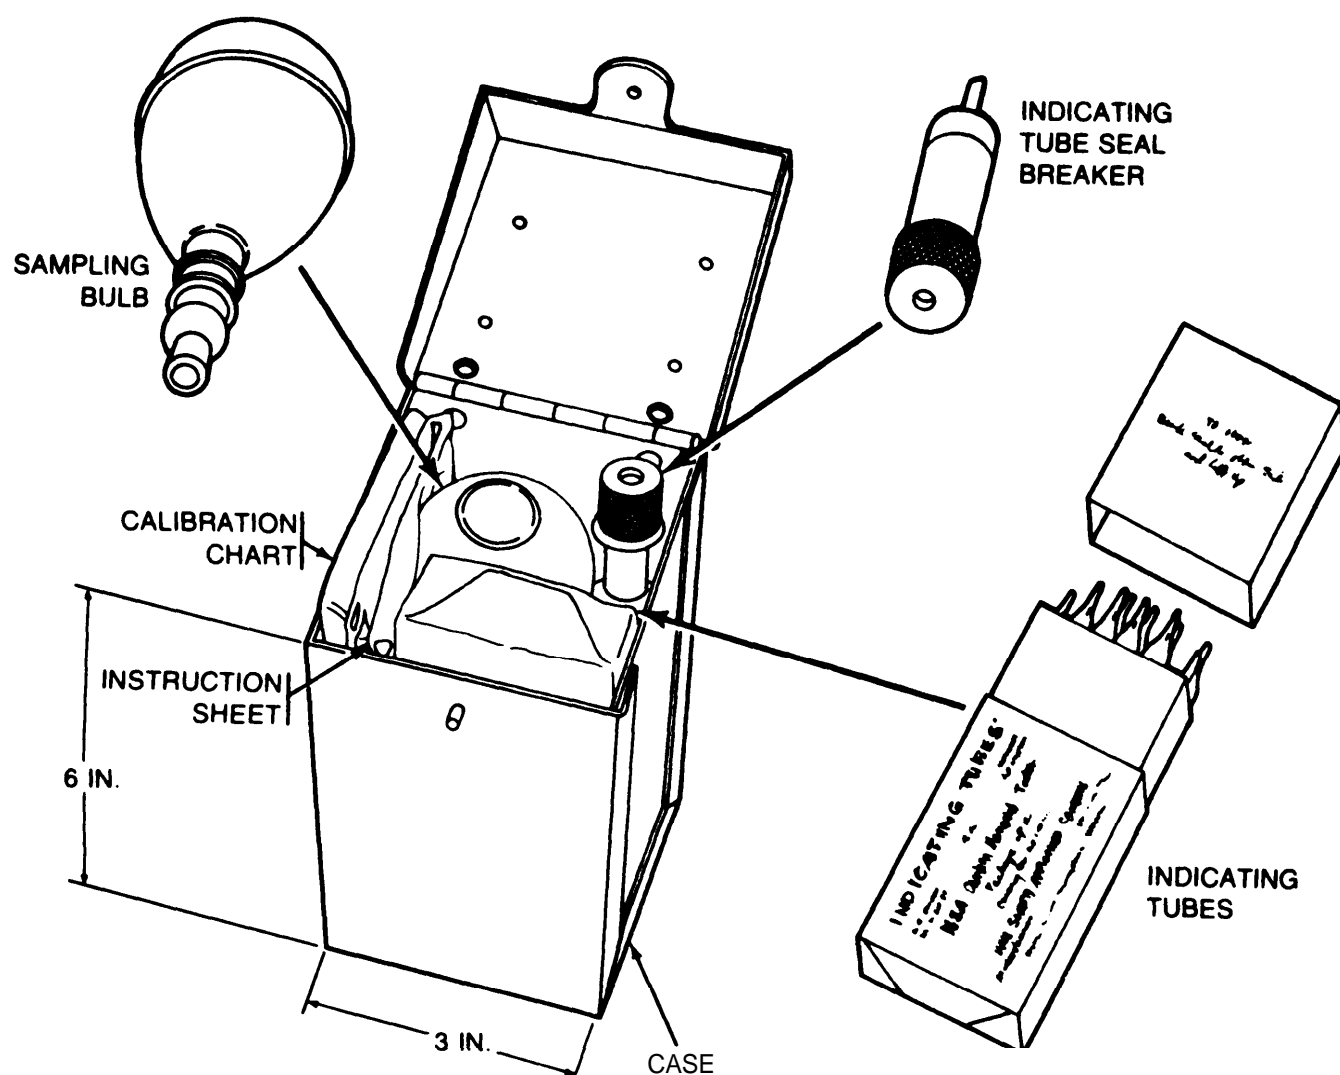

Type Classification:
STD (LCC-A); CCTC 356059

Use:

To detect and measure harmful concentrations of carbon monoxide in air. The kit is used with the M4 compressed air adapter and valve assembly to test for carbon monoxide content in compressed air cylinders during and after charging breathing apparatuses.

Description:

The M23 detector kit consists of a black metal carrying case, a sampling bulb unit, an indicating tube seal breaker, a carton of 12C3 carbon monoxide colorimetric

indicating tubes, a calibration chart, and an instruction sheet.

Functioning:

The indicating tube seal breaker is used to break the fused ends of the glass indicating tube just prior to performing the test. One end of the C3 carbon monoxide indicating tube is then inserted in the sampling bulb unit adapter. The rubber bulb on the sampling bulb unit is squeezed to draw air through the indicating tube. The yellow indicating gel in the tube changes color if carbon monoxide is present in the air sample. The colors are matched with the color comparator blocks on the calibration chart to measure the concentration of carbon monoxide in the air sample.

Tabulated Data:

NSN 6665-00-618-1482
Line item number G04163
Unit of issue Each
Basis of issue CTA 50-909
weight 1.5lb
Length. 3 in.
Width 3 in.
Height 6 in.


Shipping and Storage Data:

Type pack Two per fiberbaard box
Dimensions16 x 13 x 10 in.
Weight 8 lb
cube1.7cu ft
Specification number MIL-D-3945

References

Sc 6665-95-CL-E07
TB CML 93
TM 3-4240-224-14&P

DETECTOR KIT, CHEMICAL AGENT: ABC-M18A2

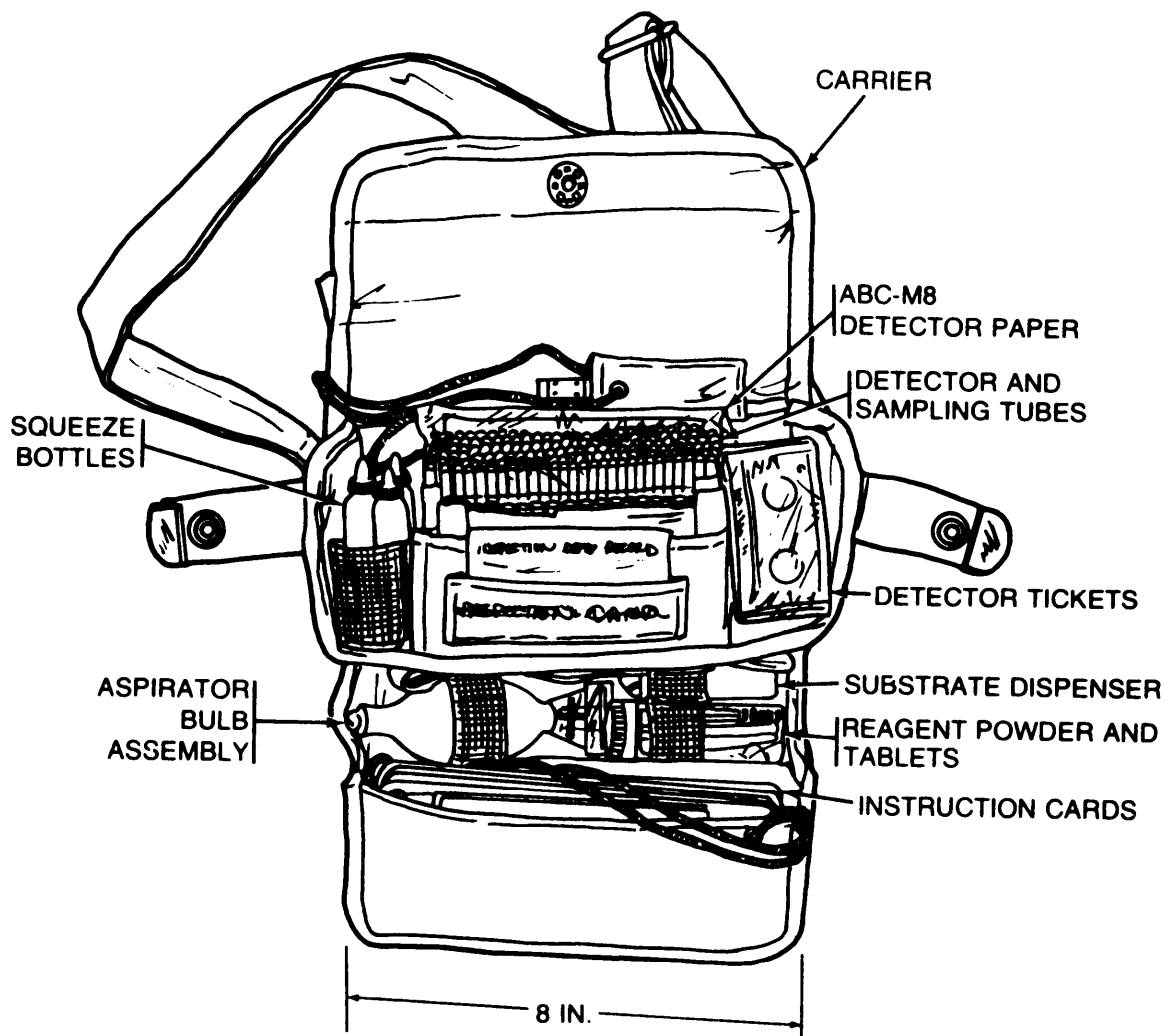*Type Classification:*

STD(LCC-B); MSR 09776017

Use:

To detect and classify dangerous concentrations of toxic chemical agents in the air and liquid chemical agent contamination on exposed surfaces. The kit is also used to collect and forward samples of unidentified toxic chemical agents to a technical intelligence team or laboratory for identification.

Description:

The ABC-M18A2 detector kit consists of the following:

a. An olive-drab canvas carrier with a carrying strap for stowing the components

- b. One belt of 40 detachable detector tickets in individual plastic envelopes
- c. Two clips of 25 blue-band glass detector tubes
- d. One clip of 25 yellow-band glass detector tubes
- e. One clip of 25 green-band glass detector tubes
- f. One clip of 25 red-band glass detector tubes
- g. One clip of 25 white-band glass sampling tubes
- h. one aspirator bulb assembly
- i. One blue-marked, plastic squeeze-bottle of sodium hydroxide
- j. One white-marked, plastic squeeze-bottle of buffered water
- k. One empty green-marked squeeze-bottle
- l. One plastic container containing 14 reagent tablets in green marked glass vial and 14 packets (straws) of powdered reagent

- m. One plastic, substrate solution dispenser
- n. One detector ticket adapter
- o. One book of 25 sheets of ABC-M8 VGH chemical agent detector paper
- p. Five report cards in envelopes and a pencil (attached to the carrier)
- q. Instruction cards
- r. An inspection data record card

Functioning:

- a. Chemically treated discs on the detector tickets change color in the presence of G or V nerve agents (or both) in the air.
- b. Chemically treated gel in the detector tubes change color in the presence of chemical agents (except V nerve agents) in the air. The reagent and substrate solutions are used to complete the chemical reactions of the detector tickets and tubes when exposed to toxic chemical agents in the air.
- c. The aspirator bulb assembly draws air samples through the detector tickets, detector tubes, and sampling tubes when testing for chemical agents in the air.
- d. Each sheet of M8 paper is impregnated with chemical compounds that change color when in contact with liquid nerve or blister agents.

Tabulated Data:

NSN	6665-00-903-4767
Line item number	G04300
Unit of issue	Each
Basis of issue	CTA 50-909
Weight	2.5 lb
Length	8 in.
Width	3 in.
Height	6 in.


Shipping and Storage Data:

Shel life	3 years
Type pack	10 per caton
Dimensions	22 x 30 x 10 in.
Weight	30 lb
Cube	1.7cu ft
Type storage	Warehouse
Drawing number	5-77-2092

References:

- FM 21-40
- FM 21-41
- FM 21-48
- TM 3-6665-254-12

DETECTOR KIT, CHEMICAL AGENT: M256

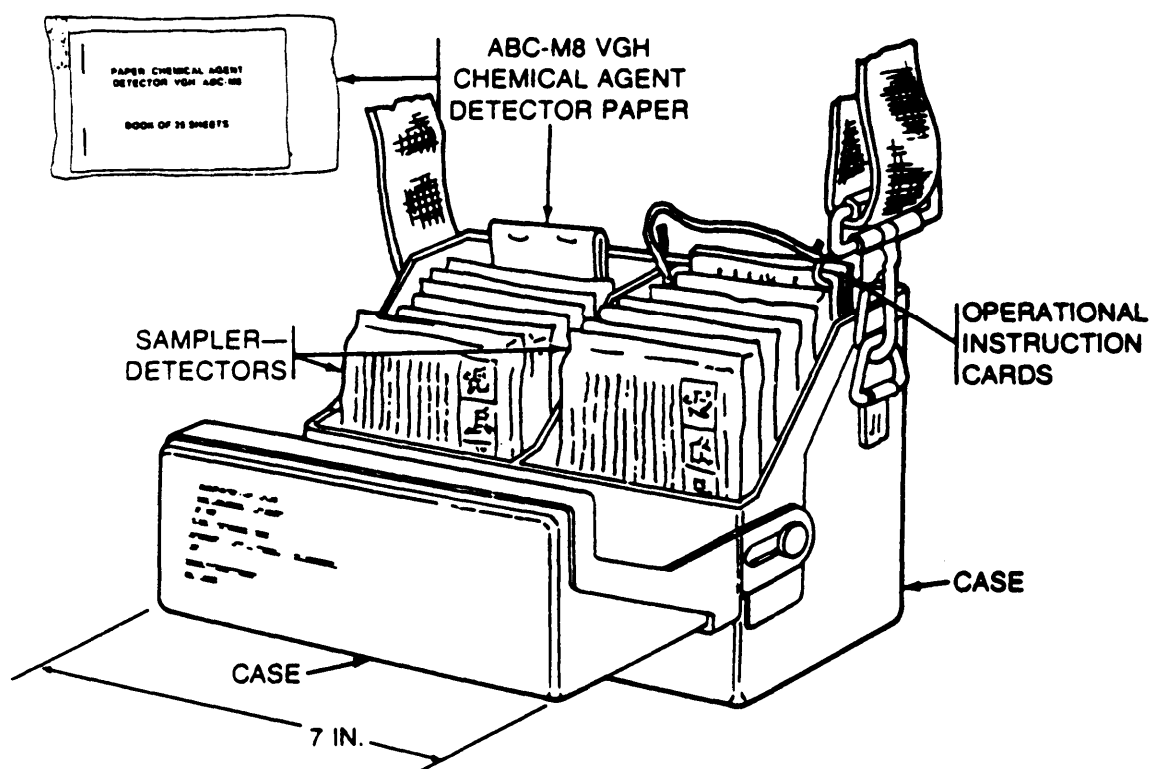**Type Classification:**

Expendable; MSR 10796026

Use:

To detect and classify dangerous concentrations of chemical agents in the air and liquid chemical agent contamination on exposed surfaces.

Description:

The M256 detector kit consists of a carrying case, 12 sampler-detectors, instruction cards, and ABC-M8 VGH chemical agent detector paper.

Functioning:

The sampler-detector is used to test for chemical agents in the air. When the ampoules are crushed between the fingers, formed channels in the plastic sheets direct the flow of the liquid reagents to wet the test spots. Each test spot of detecting tablet develops a distinctive color which indicates whether a chemical agent is or is not present in the air.

Tabulated Data:

NSN6665-01-016-8399
Line item number.....G04300

Unit of issueEach
Basis of issue.....CTA 50-909
Weight1.20 lb
Length7.00 in.
Width3.00 in.
Height.....5.00 in.

Performance:

Detects CX, H, HD, and L blister agents; V and G nerve agents; and AC and CK blood agents. The tests require about 15 minutes to complete.


Shipping and Storage Data:

Shelf life.....5 years
Type pack24 per fiberboard box
Dimensions19.75 x 18.50 x 17.00 in.
Weight46 lb
cube4.00 cu ft
Type storage.....Warehouse
Drawing number.....DL 5-77-2227

References:

TM 3-6665-307-10

DETECTOR KIT, CHEMICAL AGENT: M256A1

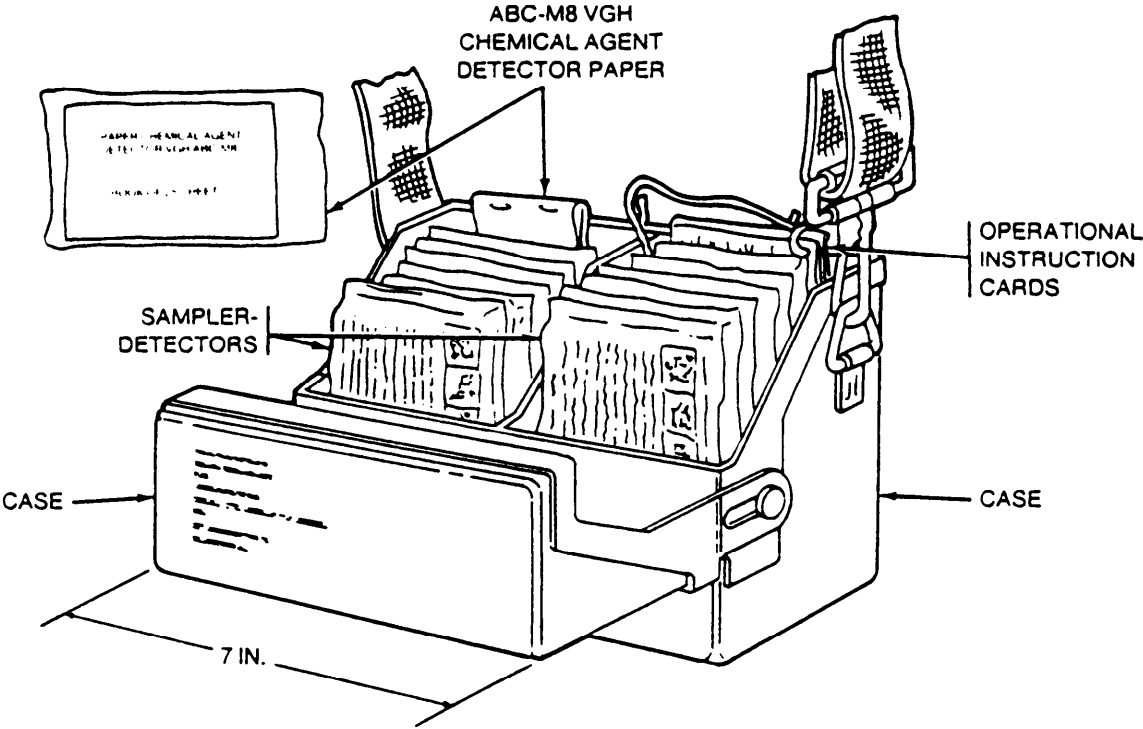

Type Classification:

Expendable; MSR 01865002

Use:

To detect and classify dangerous concentrations of chemical agents in the air and liquid chemical agent contamination on exposed surfaces.

Description:

The M256 detector kit consists of a carrying case, 12 sampler-detectors, instruction cards, and ABC-M8 VGH chemical agent detector paper.

Functioning:

The sampler-detector is used to test for chemical agents in the air. When the ampoules are crushed between the fingers, formed channels in the plastic sheets direct the flow of the liquid reagents to wet the test spots. Each test spot or detecting tablet develops a distinctive color which indicates whether a chemical agent is or is not present in the air.

Tabulated Data:

NSN6665-01-133-4964
Unit of issueKit

Basis of issue.....CTA 50-970
Weight1.20 lb
Length7.00 in.
Width3.00 in.
Height.....5.00 in.

Performance:

Detects CX, H, HD, HN, and L blister agents; V and G nerve agents; and AC and CK blood agents. The tests require about 15 minutes to complete.


Shipping and Storage Data:

Shelf life.....60 months
Type pack24 per fiberboard box
Dimensions19.75 x 18.50 x 17.00 in.
Weight46 lb
cube4.00 cu ft
Type storage.....Warehouse
Drawing number5-77-2240
P5-77-2240

References:

TM 3-6665-307-10

MARKING SET, CONTAMINATION: NUCLEAR, BIOLOGICAL, CHEMICAL (NBC)

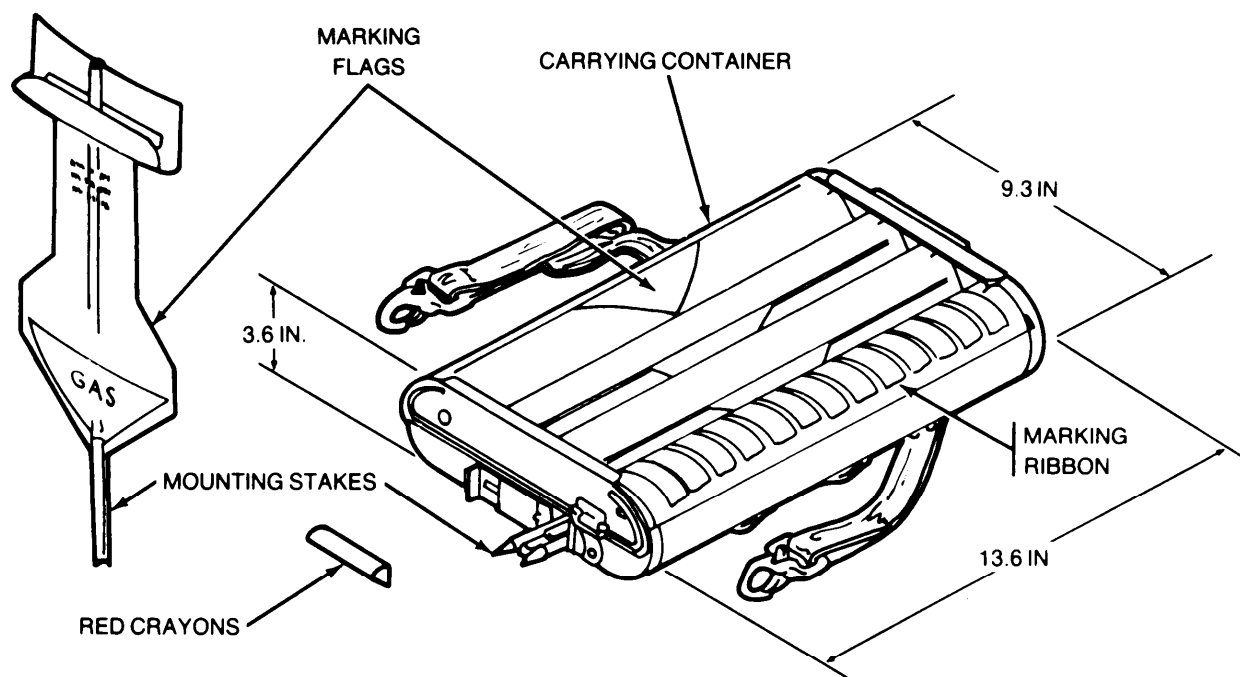*Type Classification:*

Expendable; DEVA 0781

Use:

To mark contaminated as defined by FM 3-3.

Description:

The NBC contamination marking set consists of a carrying container, three flag containers, a ribbon container, 48 mounting stakes, and red crayons. The carrying container holds all individual parts of the set and has adjustable straps for front or back wear. One flag container holds 20 white flags for marking nuclear contamination. Another holds 20 blue flags for marking biological contamination. The third holds 20 yellow

flags for marking chemical contamination. The mounting stakes are stored in the bottom of the carrying container and are used to make poles for hanging flags and attaching the marking ribbons. The marking ribbons are used as lines to enclose and mark the dangerous area. The red crayons are used to mark information about the contaminated area on the flags.

Functioning:

Flags may be attached to single objects such as branches or small tree trunks to mark small contaminated areas or to one or several marking stakes to mark large contaminated objects or small areas or may be hung on the ribbons strung between mounting stakes implanted and braced in the ground.

Tabulated Data:

NSN9905-12-124-5955
 Unit of issue Each
 Basis of issue CTA 50-970
 Carrying container with components:
 Weight10.0lb
 Length13.6in.
 Width9.3in.
 Height3.6in.
 Mounting stakes:
 Length11.4 in.
 Quantity48 ea
 Marking flags:
 See a., b., c. below
 Marking ribbon:
 Seed. below
 Quantity rolls13 ea
 Length of each roll66 ft
 Marking rods:
 See e. below
 Marking crayon:
 See f. below

Rep/aceable items:


- a. Sign (Warning flag BIO-color blue)
9905-12-132-2578
- b. Sign (Warning flag ATOM -color white)
9905-12-132-2579
- c. Sign (Warning flag GAS-color yellow)
9905-12-132-2580
- d. Tape, textile (Ribbon, yellow)
8513-12-132-2577
- e. Marking rods
9905-12-133-0113
- f. Crayon, marking
7510-12-120-9355

Shipping and Storage Data:

Type pack 14 3/4 X 6 3/4 X 19 1/4 in.
 Weight58 lb
 Cube 1.3 cu ft
 Type storage Warehouse
 Drawing number5-51-573

References:

TM3-9905-001-10/C1

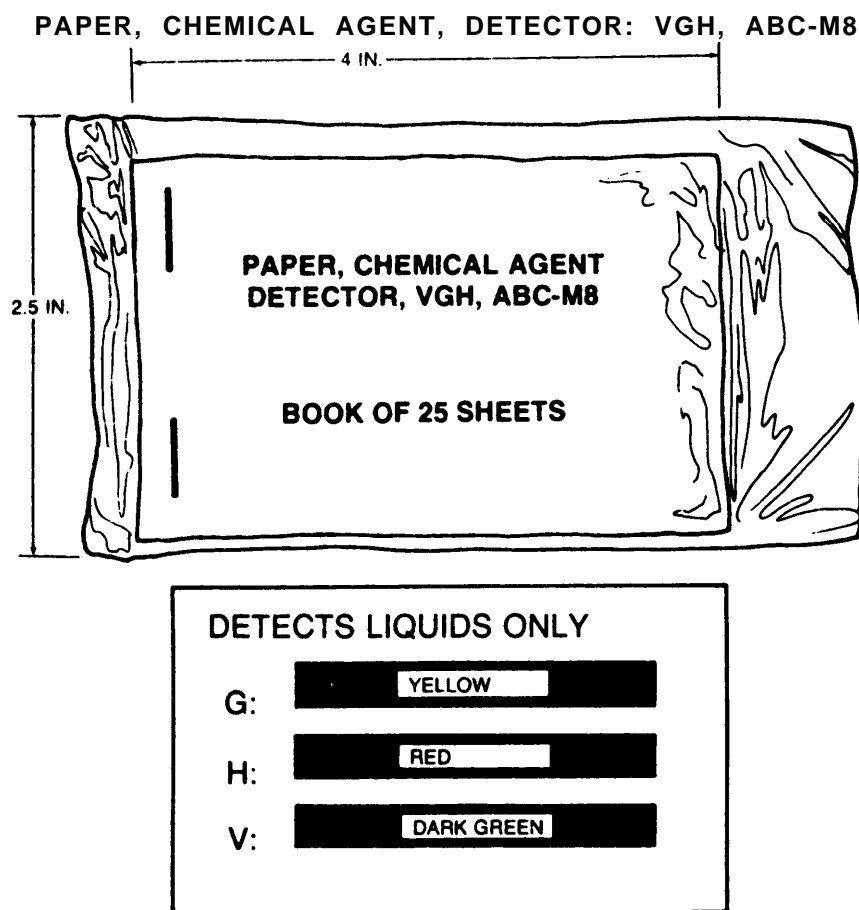**Type Classification:**

Expendable; MSR 01736026

Use:

To detect the presence of liquid VGH chemical agents.

Description:

The M8 paper is issued in a book of 25 sheets of chemically-treated, dye-impregnated paper, perforated for easy removal. A color comparison bar chart is printed on the inside of the front cover of the book.

Functioning:

When a sheet of M8 paper is brought in contact with liquid nerve or blister agents, they react with chemicals in the paper to produce agent specific color changes.

Limitations:

The ABC-M8 paper cannot be used to detect chemical agents in water or aerosol agents in the air.

Tabulated Data:

NSN6665-00-050-8529

Unit of issue **Book**

Basis of issue CTA 50-970

Length 4 in.

Width 2.5 in.

Height 0.25 in.

Shipping and Storage Data:

Type pack 1,000 per fiberboard box

Weight 40 lb

Cube 0.9cu ft

Type storage Warehouse

Drawing number LM 5-67-266; 5-67-276

References:

FM 21-40

FM 21-41

TM 3-6665-205-10/1,-10/2

TM 3-6665-226-10

TM 3-6665-227-10



TM 3-6665-253-12

TM 3-6665-254-12

TM 3-6665-268-10

TM 3-6665-307-10

PAPER, CHEMICAL AGENT DETECTOR: M9

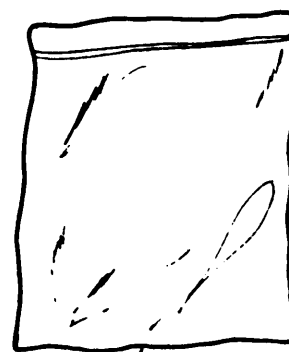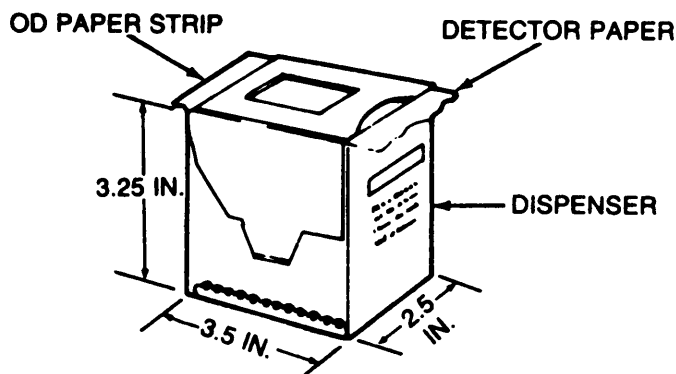REUSABLE PLASTIC
STORAGE BAG*Type Classification:*

Expendable: DEVA 0780

Use:

To detect presence of liquid chemical agents.

Description:

M9 chemical agent detector paper is issued in a roll, two inches wide and 30 feet long, contained in a cardboard dispenser with a cutter edge. The detector paper is gray-green and has an adhesive back protected by an OD paper strip until dispensed from the roll. A reusable plastic storage bag is included for storing the dispenser after removal from the shipping bag.

Functioning:

The paper sticks to clothing, vehicles, and other equipment. When a liquid chemical agent touches the paper, dye in the paper reacts with the agent to form pink, red, red-brown, or red-purple spots or streaks.

Limitations:

- The chemical agent detector paper is not effective below 32°F or above 125°F.
- It will not detect chemical agent vapors.
- May give false positive reading when exposed to heat above 125°F; scuffing; various petroleum products such as grease, gasoline, or oil; defoliants and insecticides; DS2 decontaminating agent; and many other chemicals encountered by the user.

d. Protective gloves should be worn when touching detector paper. The detector paper dye could cause cancer if placed in or near mouth or skin although the risk is small.

Tabulated Data:

NSN	6665-01-049-8982
Unit of issue	Roll
Basis of issue	CTA 50-970
Weight	7 oz
Roll:	
Length	30 ft
Width	2 in.
Dispenser:	
Dimensions	3.5 x 2.5 x 3.25 in.



Shipping and Storage Data:

Type pack	Foil-type storage bag/250 per wooden box
Weight	98 lb
Cube	5.6 cu ft
Type storage	Warehouse
Drawing number	5-88-1

References

FM 21-40
FM 21-41
FM 21-48
TM 3-220
TM 3-6665-31-10

POWER SUPPLY, CHEMICAL AGENT, AUTOMATIC ALARM: M10 AND M10A1

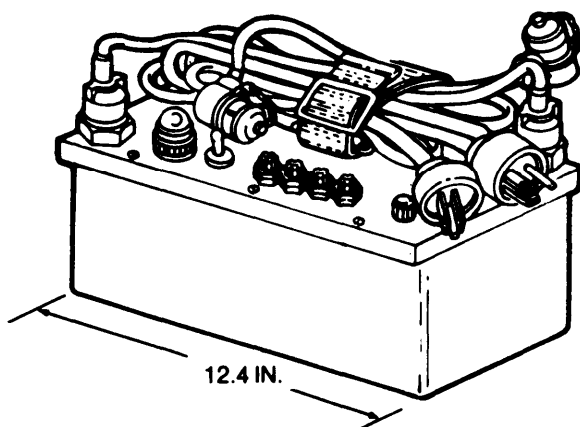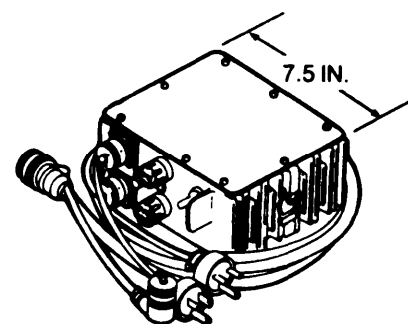**M10 POWER SUPPLY****M10A1 POWER SUPPLY***Type Classification:*

M10A1 STD (LCC-A); MSR 02816012

M10 STD (LCC-B); MSR 02816012

Use:

To convert electrical power from nearby installation or generator set sources of ac power to dc power for operating the M43 or M43A1 detector unit of the M8 or M8A1 automatic chemical agent alarm.

Description:

The M10 and M10A1 power supplies are compact electrical power transformers with two input and two output power cables.

Differences Between Models:

The M10A1 power supply is more compact and lighter than the M10 power supply. The M10A1 power supply can be attached to the bottom case of the M43 or M43A1 detector unit. A BA3517/U battery for standby power can be attached underneath the M10A1 power supply.

Functioning:

The input power cables connect the power supply transformer to 115 Vac or 230 Vac power sources. The power supply transformer/rectifier regulator converts 115 Vac or 230 Vac to a regulated 29 ± 3 Vdc output. The output cables connect the power supply to a standby battery (BA3517/U or BB501/U). If the ac power source fails, a power failure relay opens in the power

supply. Then the detector unit automatically draws its power from the standby battery. A light on the power supply will glow to indicate that the ac power source is off. This light will continue glowing until ac power is restored and the circuit is reset manually.

Tabulated Data:

M10A1 NSN 6665-01-093-2739

M10 NSN 6665-00-859-2225

Line item number P28655

Unit of issue Each

Basis of issue TOE/MTOE.

AR 310-34

M10A1 weight and dimensions:

Weight 6.5 lb

Length 7.50 in.

Width 6.62 in.

Height 3.25 in.

M10 weight and dimensions:

Weight 18 lb

Length 12.4 in.

Width 6.4 in.

Height 7.4 in.

*Performance:**Power requirements:*

Input 100 to 135 Vac or

200 to 260 Vat,

single-phase,

50, 60 or 400 Hz

Output 26 to 32Vdc

Operating temperature From -140°F to 120°F

Shipping and Storage Data:


M10A1 power supply:
Type pack Wooden Box
Weight 17 lb
Cube 0.6 cu ft
Type storage Warehouse
Drawing number5-15-6026

M10 power supply:
Type pack Wooden box
Weight 41 lb
cube 1.3 cu ft
Type storage Warehouse
Drawing number5-15-4727

References:

FM 21-40
FM 21-41
SB 740-94-3
TM 3-6665-225-12
TM 3-6665-261-14
TM 3-6665-261-24P
TM 3-6665-273-20
TM 3-6665-274-20
TM 3-6665-312-12&P
TM 3-6065-312-30&P
TM 43-0002-31

REFILL KIT, ANALYZING COMPONENTS, CBR AGENTS
SAMPLING AND ANALYZING KIT: M33

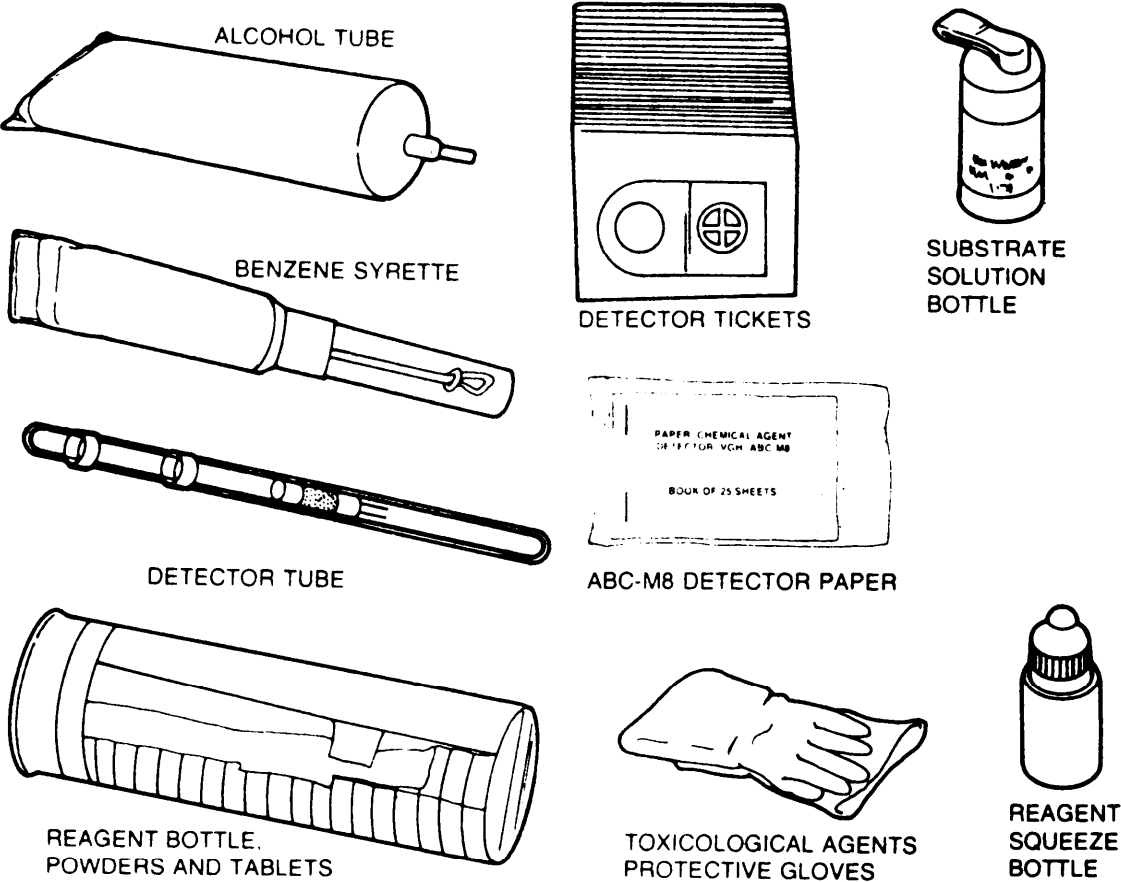

NOTE. ONLY REPRESENTATIVE COMPONENTS ARE SHOWN

Type Classification:
Expendable: AMCTC 2175 64

Use:
To replace expendable components in the M19 CBR agent sampling and analyzing kit when the components have been consumed in use or their shelf life has expired.

Description:
The M33 refill kit contains the following components:

Component	Quantify
Paper, Chemical Agent Detector, VGH, ABC-M8	...4 books
Detector tubes (15 per clip)	...51 clips
Alcohol tube (10 per box)	...2 boxes
Benzene syrettes (30 per box)	...1 box
Swabs	...4 boxes
Capillary tubes	1 container
Combination filters (2 per packet)	...75 packets

Reagents sets	...2 sets
Detector tube end seals	1 box
Dragendorff paper (1paper perpacket)	75 packets
Matches	...1 box
Field notebook pads	...2 each
Test tubes (21 per box)	...4 boxes
Anticholinesterase (Anti-ChE) detector tickets (40 tickets per belt)	...6 belts
Substrate dispensers (2 dispensers)	...1 box
Needle, knitting	1each
Ballpoint pen	...1each
Pencil, lead	...1each
Pencil, wax marking	...1each
Forceps, medium point, plastic coated tips	...1 each
Forceps, specimen	1 each
Gloves, neoprene	...2 pair
Shipping tags and envelopes	...15 sets
Filter paper dispenser	...1 each
Instructions for use of refill kit (cards)	1 set
Rubber stoppers	...2 each

TM 43-0001-26-1

Wicks, braided3 each
Lamps, incandescent2 each
Writing paper1 pad
Wood clips2 each

Functioning:

The analyzing components of the M19 sampling and analyzing kit are replaced by the M33 refill kit.

Tabulated Data:

NSN6665-00-776-8819
Unit of issueEach
Basis of issueCTA 50-970


Shipping and Storage Data:

Shelf life2 years
Type pack4 per wood box
Dimensions39 x 26 x10 in.
Weight75 lb
cube5.9 cu ft
Type storage Warehouse
Specification MIL-R-51199

References:

TM 3-6665-205-10/1 and 10/2

REFILL KIT, CHEMICAL AGENT AUTOMATIC ALARM: M229

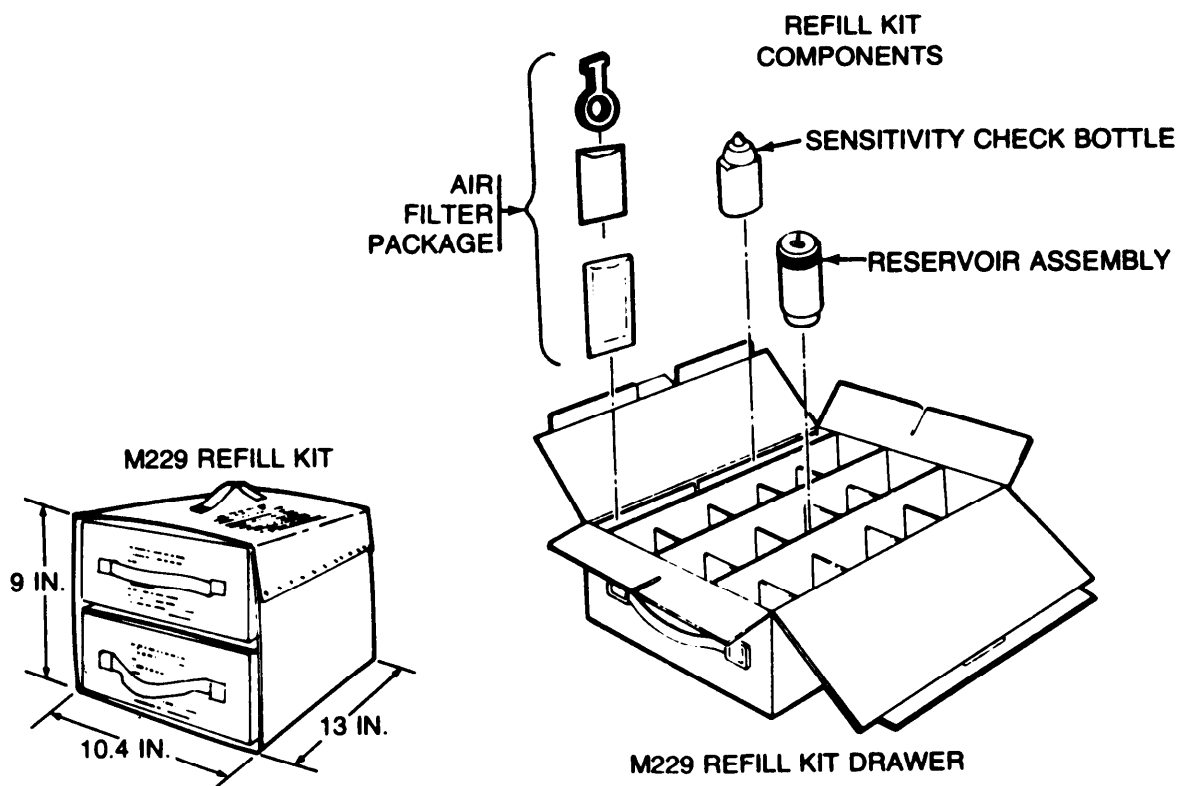*Type Classification:*

Expendable; AMCTC 951272

Use:

To replace the consumable materials for sustaining the operation of the M43 detector unit for the M8 automatic chemical agent alarm.

Description:

The M229 refill kit contains a 15 day supply of materials for continuous operation of the M43 automatic chemical agent alarm detector unit. Each drawer contains 15 reservoir assemblies, one cell-sensitivity check bottle, and 30 air filter packages.

Functioning:

The M229 refill kit drawers are used to store the air filters, reservoir assemblies, and cell-sensitivity check bottles for operating and testing the M43 automatic chemical agent alarm detector unit.

Tabulated Data:

NSN6665-00-859-2214

Unit of issue	Each
Basis of issue	CTA 50-970
Weight	13.8 lb
Length	13 in.
Width	10.4 in.
Height	9 in.



Shipping and Storage Data:

Type pack	One per wooden box
Dimensions	15 x 12 x 11 in.
Weight	28 lb
cube	1.2 cu ft
Type storage	Warehouse
Storage temperature	From -65°F to 160°F
Drawing number	DL 5-15-4700

References:

TM 3-6665-225-12
TM 3-6665-260-14;-24P
TM 3-6665-302-20P;-34;-34P

REFILL KIT, CHEMICAL AGENT DETECTOR: VG COMPONENTS, ABC-M30A1

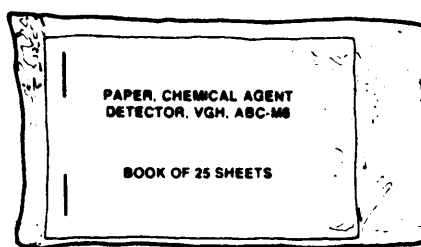SUBSTRATE
SOLUTION
BOTTLE
(FILLED)WHITE DOT
SQUEEZE
BOTTLE
(FILLED)DETECTOR TICKETS
(ONE BELT OF 40)

ABC-M8 DETECTOR PAPER

Type Classification:

Expendable; AMCTC 9512 72

Use:

To complement the G-agent detection capability of the AN-M2 chemical agents water testing kit. When used together, the ABC-M30A1 and AN-M2 kits are used to distinguish whether a water sample contains either V or G agents or both. The kit can also be used when performing extensive training or testing with detector tickets.

Description:

The ABC-M30A1 refill kit consists of a fiberboard box containing the following components:

- One belt of 40 detector tickets
- One filled white-dot squeeze bottle
- One filled substrate bottle
- An instruction card
- One book (25 sheets) of ABC-M8 VGH Chemical Detector Paper

Functioning:

A chemically treated test spot on the square end of

the detector ticket is used to sample the water. When solutions from the white dot squeeze bottle and the substrate solution bottle are applied to the wettest spot, a chemical reaction results. If there is no agent, the test spot turns blue. If G or V nerve agent is present, the test spot remains colorless or turns orange.

Tabulated Data:


NSN	6665-00-909-3647
Unit of issue	Each
Basis of issue	CTA 50-970

Shipping and Storage Data:

Shelf life	3 years
Type pack	Fiberboard box
Dimensions	0.42 x 0.29 x 0.25 in x 0.25 in.
Weight	0.52 lb
Cube	0.081 cu ft
Type storage	Warehouse
Specification	MIL-R-51237

References:

TM 3-6665-308-10

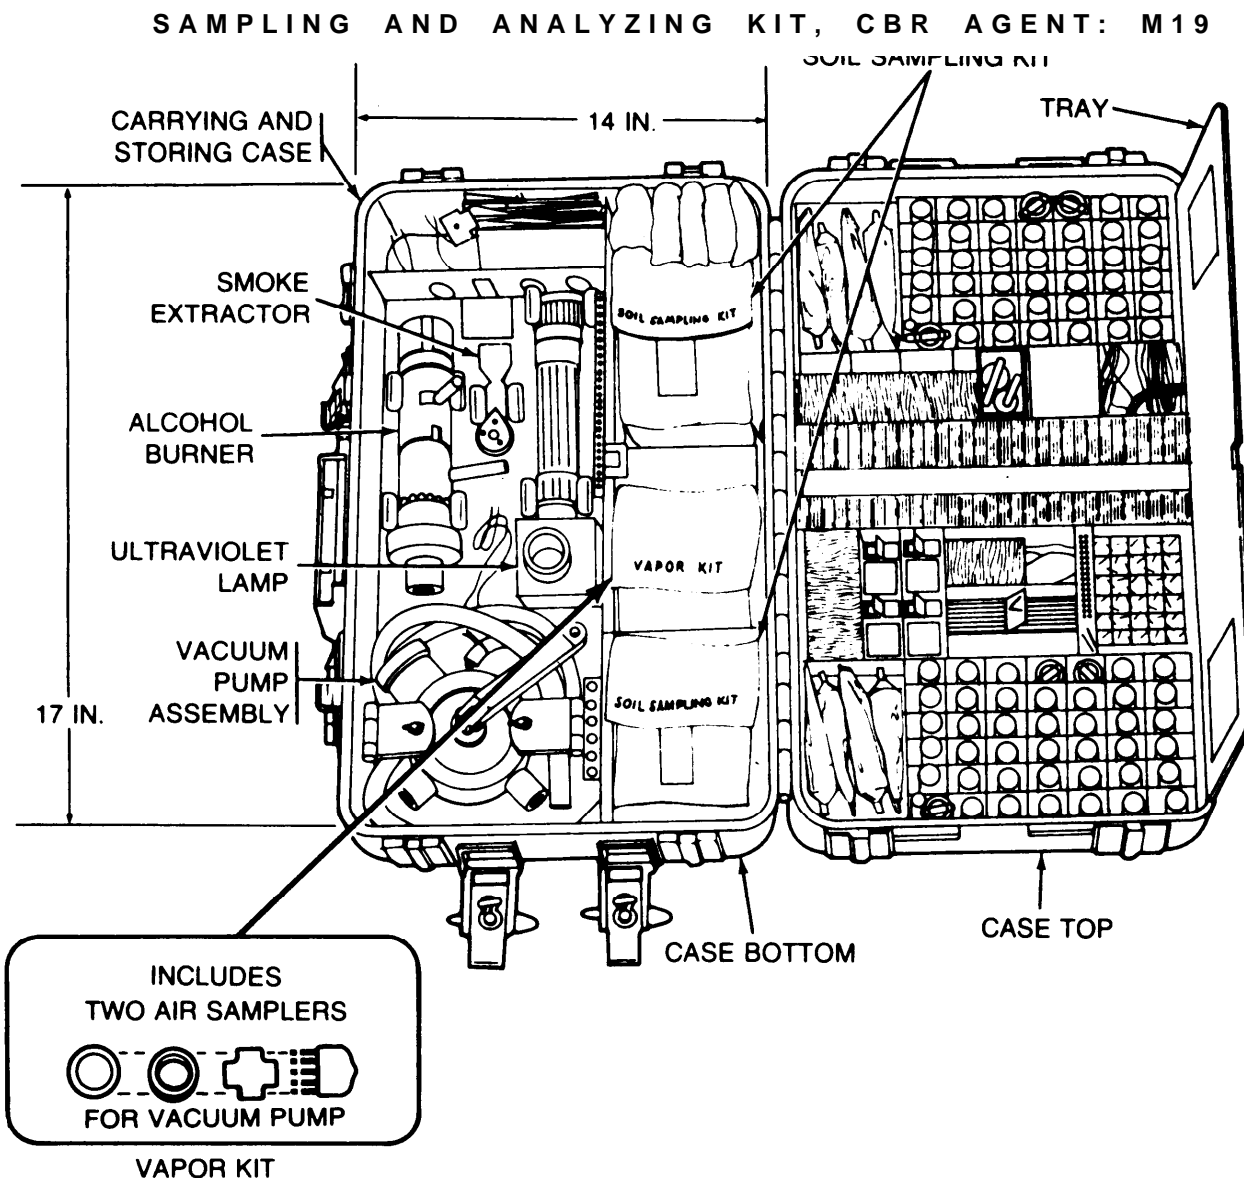*Type Classification:*

STD (LCC-A); AMCTC 217564

Use:

To detect and identify enemy chemical agents, perform preliminary processing of unidentifiable chemical or biological agent samples, and delineate contaminated areas.

Description:

The M19 kit consists of a metal or fiberglass carrying and storage case containing the following items:

- a. A vacuum pump assembly
- b. A vapor kit
- c. An aspirator bulb assembly

- d. A smoke extractor
- e. An alcohol burner assembly
- f. An ultraviolet lamp
- g. Miscellaneous consumable sampling and analyzing supplies. When these components become unserviceable or are consumed, the M 19 kit is resupplied from the M34 sampling kit and the M33 analyzing components refill kit.

Functioning:

- a. The vapor kit is used with the vacuum pump and other sampling components from the M 19 kit to collect chemical agent vapor, smoke, and aerosol samples from the air.

- b. The smoke extractor is used to separate benzene-soluble smokes or aerosols from water-soluble smokes or aerosols.
- c. The consumable sampling and analyzing supplies are used with the MI 9 kit hardware for collecting, detecting, evaluating, analyzing, and packaging samples of suspected agents.

Tabulated Data:

NSN	6665-00-776-8810
Line item number	S29577
Unit of issue	Each
Basis of issue	TOE/MTOE
Weight	48 lb
Length	20 in.
Width	13 in.
Height	8 in.


Shipping and Storage Data:

Shelf life	3 years (detector tubes, tickets, and reagents)
Type pack	Metal or fiberglass case
Dimensions	20 x 13 x 8 in.
Weight	48 lb
Cube	1.5 cu ft (crated)
Type storage	Warehouse
Drawing number	5-77-353

References:

- SC 6665-94-CL-E03
- TM 3-6665-205-10/1 and-10/2

SAMPLING KIT, CBR AGENT: M34 SOIL SAMPLING KITS (2)

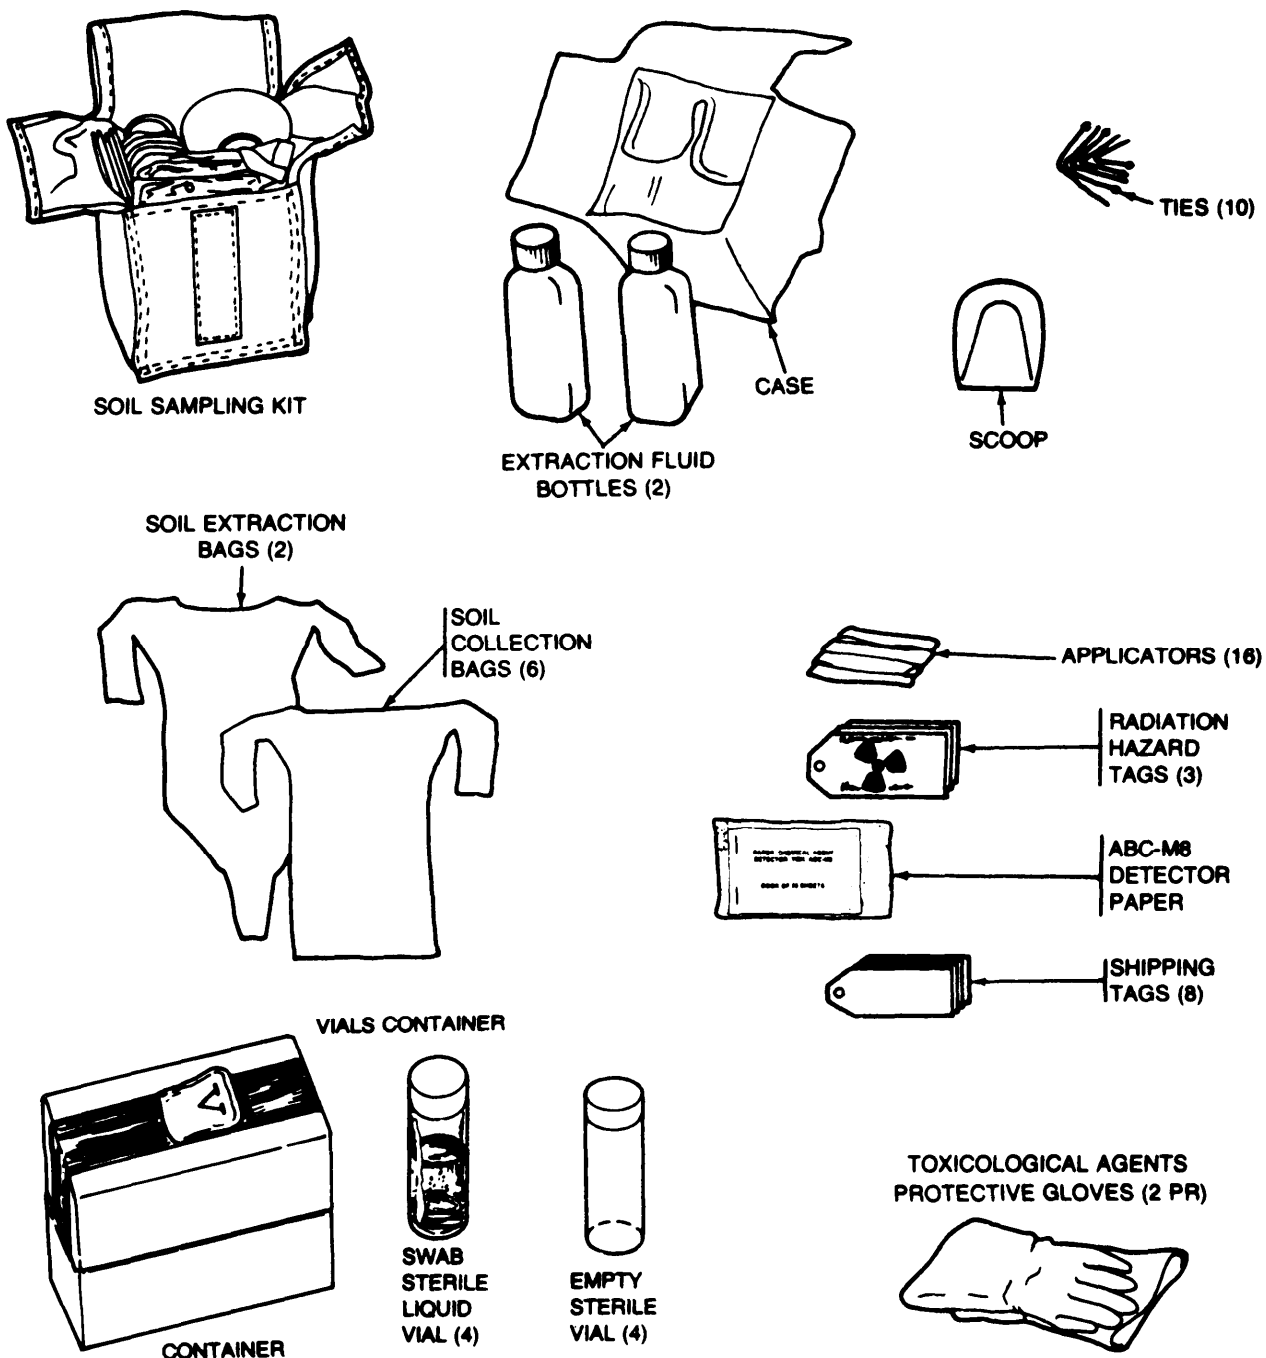

Type Classification:
Expendable; AMCTC 2175 64

Use:

To sample soil, surfaces, and water for chemical agents and biological agents. The kit can also be used to

perform preliminary processing of soil samples.

Description:

The M34 sampling kit consists of two soil sampling kits, one vials container, two pairs of toxicological agents proactive gloves, and a set of instruction cards.

Functioning:

The soil sampling kits and vials are used for collecting, marking, and shipping suspected contaminated soil or water samples to a base chemical laboratory for analysis.

Tabulated Data:

NSN6665-00-776-8817
 Unit of issue Each
 Basis of issue CTA 50-970 and as a
 component of the MI 9
 sampling and analyzing kit.
 Weight4.5 lb
 Length20 in.

Width 18 in.
 Height 11 in.


Shipping and Storage Data:

Type pack24 fiberboard carton
 Weight 43 lb
 Cable. 2.3 cu ft
 Type storage Warehouse
 Drawing number5-77-353

References:

TM 3-6665-205-10/1 and 10/2
 TM 3-6665-268-10

WATER TESTING KIT, CHEMICAL AGENTS: M272

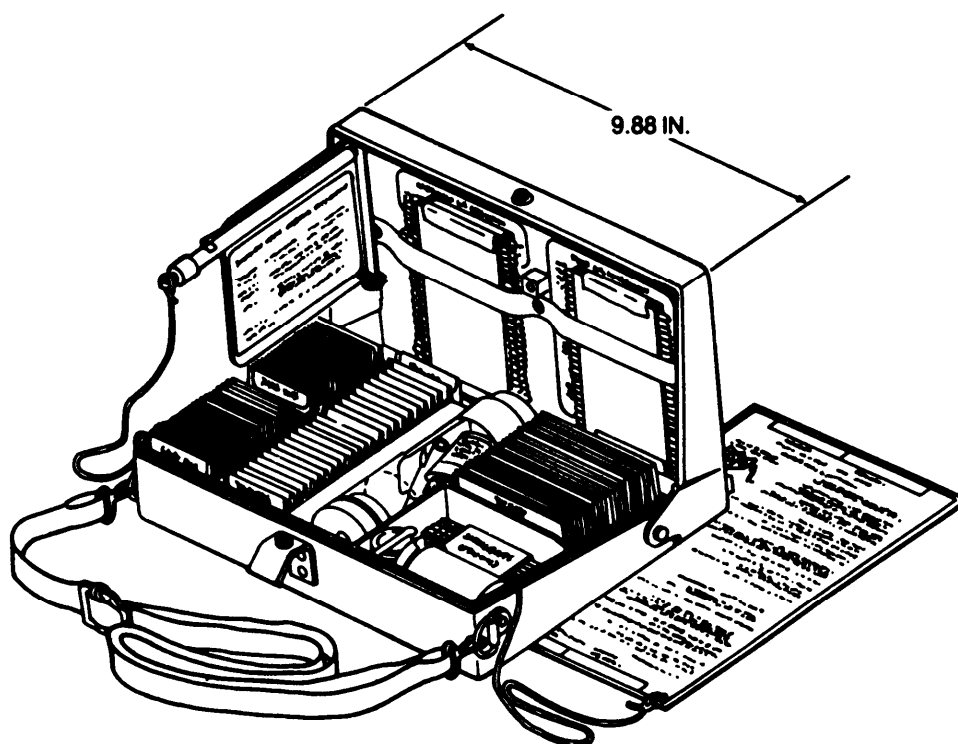

Type Classification:
Expendable;DEVA 0183

Use:

To detect and identify dangerous levels of common chemical agents in water sources.

Description:

The M272 kit consists of 25 containers of reagents, thermomometer and holder, test bottle, waterproof matches and Container, instruction cards, 5 rubber connectors, and a carrying case.

Functioning:

The M272 watertesting kit can be used to test 25 samples of water for dangerous amounts of cyanide, mustard, i, lewisite, and, nerve agents. Reacts to these chemical agents or training simulants in raw or treated water.

Limitations:

Contains hazardous chemicals requiring special protective clothing and equipment and handling precautions.

Tabulated Data:

NSN6665-01-134-0885
Unit of issue Each
Basis of issue CT A50-970
Weight 2.4 lb
Length 9.88 in.
Width 6.25 in.
Height 2.75 in.


Shipping and Storage Data:

Type pack One per wooden box
Weight 3 lb
Cube 0.4 cu ft
Type storage Warehouse
Drawing number 5-77-25

References

TM 3-6665-319-10

WINTERIZATION KIT, AUTOMATIC CHEMICAL AGENT ALARM: M253

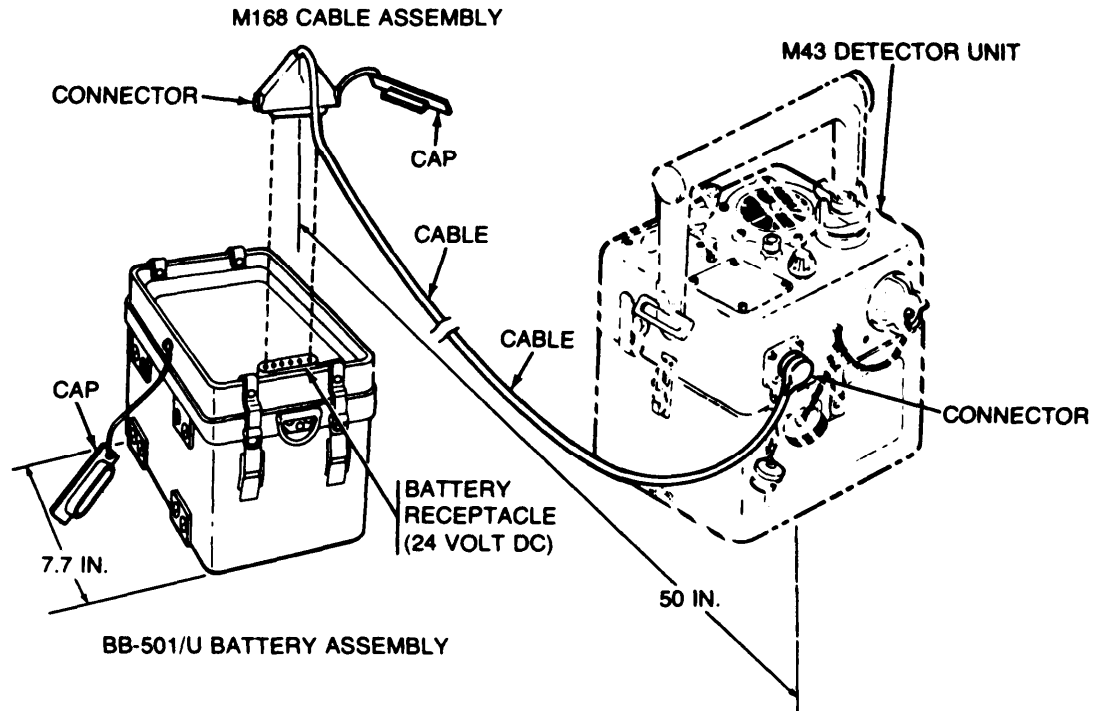

Type Classification:

STD (LCC-A); AMCTC 8604 71

Use:

To provide an independent source of power for the M43 or M43A1 detector unit during operation of the M8 or M8A1 automatic chemical agent alarm in extremely cold climates.

Description:

The M253 winterization kit consists of two BB501/U battery assemblies and one MI 68 cable assembly.

Functioning:

The BB501/U battery is used to supply 24 Vdc power to the M43 or M43A1 detector unit when operating temperatures of 20°F and below are expected.

Tabulated Data:

NSN6665-00-169-1455
 Line item number Y56067
 Unit of issueEach
 Basis of issue TOE/MTOE for units
 operating in arctic
 temperature

BA501/U battery:

Weight28 lb

Length13 in.
 Width6.5 in.
 Height 7.2 in.
 M168 cable assembly:
 Weight1lb
 Length50 in.

Performance:

Operating temperature From -40° to 165°F.

Shipping and Storage Data:

Type pack Wooden box
 Dimensions21.3 x 17 x 14.5 in.
 Weight85 lb
 Cube3.0 cu ft
 Type storage Warehouse
 Storage temperature From -80°F to 165°F
 Drawing number 5-15-6535; M168 cable
 assembly 5-15-5550

References:


TM 3-6665-225-12
 TM 11-6140-203-15-3

CHAPTER 2

INDIVIDUAL PROTECTION

	Page
Adapter and Valve Assembly, Compressed Air: M4	2-3
Adapter, Oxygen Supply, CB Mask, Aircraft: ABC-M8	2-5
Bag, Waterproofing, Chemical-Biological Mask: M1 and M1A1	2-7
Breathing Apparatus, Compressed Air: M15	2-9
Breathing Apparatus, Oxygen Generating: M20 (Deleted)	2-11
Breathing Apparatus, Self-Contained: M23 and M23A1	2-13
Filter Element Set, Chemical-Biological: Mask M13A2	2-15
Hood, Chemical-Biological Mask: Aircraft, ABC-M7	2-17
Hood, Chemical-Biological Mask: Field, ABC-M6A2	2-19
Hood, Chemical-Biological Mask: Tank, ABC-MS	2-21
Mask, Chemical-Biological: Aircraft, ABC-M24	2-23
Mask, Chemical-Biological: Aircraft, M43	2-24.1
Mask, Chemical-Biological: Combat Vehicle, M42	2-24.3
Mask, Chemical-Biological: Field, ABC-M17, M17A1, M17A2	2-25
Mask, Chemical-Biological: Field, M40	2-27
Mask, Chemical-Biological: Headwound, ABC-18 (Deleted)	2-27
Mask, Chemical-Biological: Special Purpose, M9 and M9A1	2-29
Mask, Chemical-Biological: Tank, ABC-M25A1	2-31
Mask, Gas: Acid and Organic Vapors, M10 (Deleted)	2-33
Mask, Gas: All-Purpose, M11A1 (Deleted)	2-35
Mask, Gas: Ammonia, M12 (Deleted)	2-37
Protective Outfit, Toxicological: Microclimate Controlled (POTMC) (Deleted)	2-39
Winterization Kit, Chemical-Biological Mask: M1	2-41
Winterization Kit, Chemical-Biological Mask: M3	2-43
Winterization Kit, Chemical-Biological Mask: M4	2-45

ADAPTER AND VALVE ASSEMBLY, COMPRESSED AIR: M4

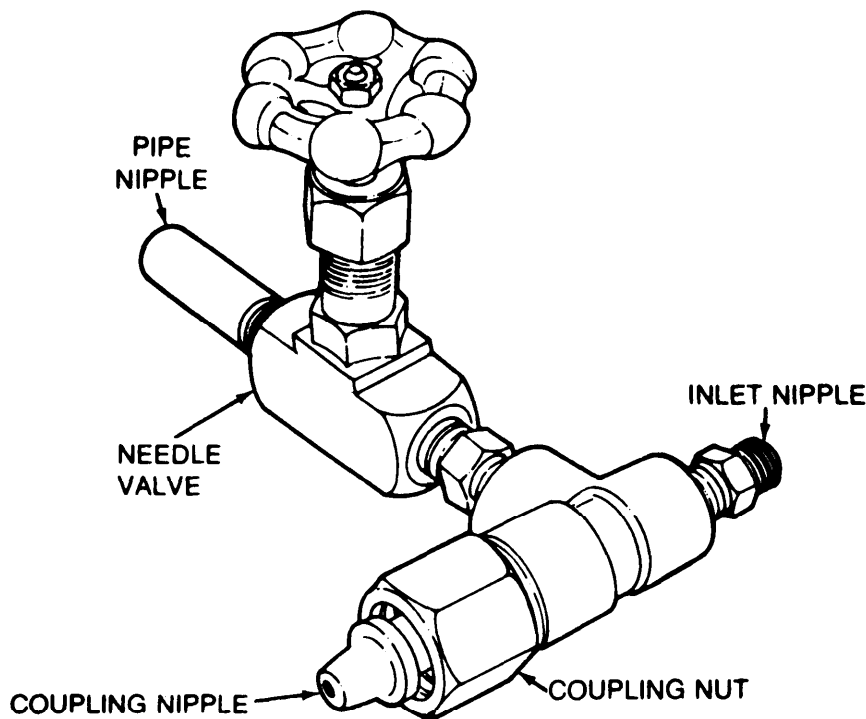

Type Classification:
STD(LCC-A);CCTC 3585 59

Use:

To couple the air cylinders of the M15 compressed air breathing apparatus to a 15 cfm 3,500 psi air compressor for charging. It also provides a chamber for sampling air for carbon monoxide during or after the charging operation.

Description:

The M4 adapter consists of a heavy duty tee with:

- a. A heavy duty inlet nipple at the air inlet end
- b. A coupling nipple and coupling nut at the air outlet end
- c. An air outlet end
- d. A needle valve and pipe nipple at the air sampling end

Functioning:

When the M4 adapter is connected to an air compressor, air from the compressor enters the inlet nipple. This air passes through the pipe tee and coupling into

the cylinders of the M15 breathing apparatus.

Tabulated Data:

NSN	4240-00-633-5792
Unit of issue	Each
Basis of issue	CTA 50-909
Weight	2.5 lb
Length	6 in.
width	5 in.
Height	, 4 in.


Shipping and Storage Data:

Type pack	1 per fiberboard box
Weight	3 lb
cube	0.1 cu ft
Type storage	Warehouse
Drawing number	5-82-8

References:

TM CML 93
TM 3-4240-224-12,-35,-20P,-35P

ADAPTER, OXYGEN SUPPLY, CB MASK, AIRCRAFT: ABC-M8

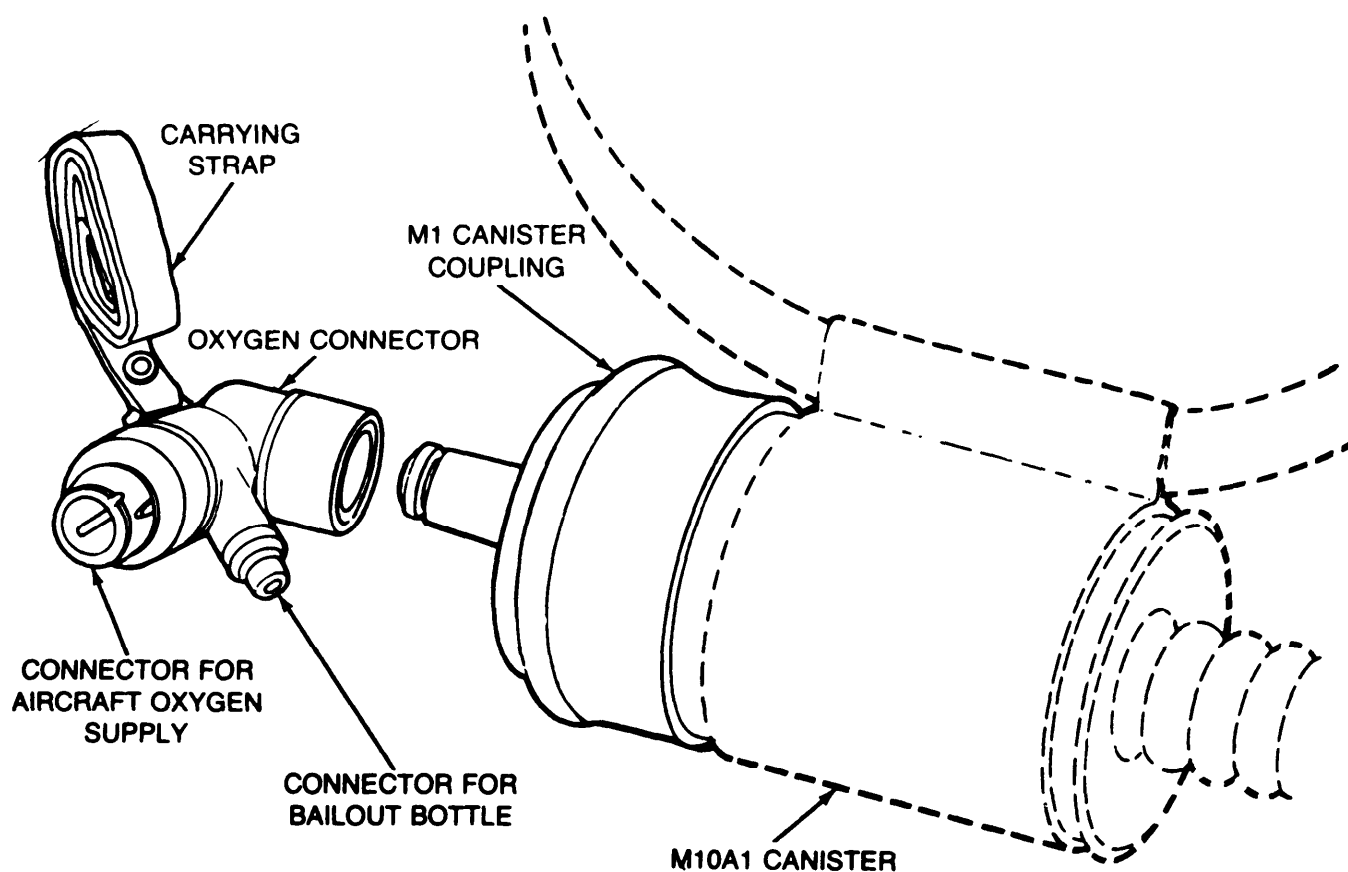*Type Classification:*

Expendable; AMCTC 9512 72

Use:

To connect an ABC-M24 aircraft chemical biological mask to the oxygen supply system of an airplane or to an oxygen-bailout bottle.

Description:

The ABC-8 adapter is an oxygen connector with two small inlets leading from an elbow with a larger outlet at one end. A carrying strap is attached to the elbow of the connector. An M1 canister coupling is furnished with the adapter.

Functioning:

At high altitudes, oxygen flows from the oxygen supply system or bailout bottle through the connector and canister coupling to the canister inlet. The oxygen flows through the canister and hose to the facepiece of the mask.

Tabulated Data:

NSN	4240-00-848-6074
Unit of issue	Each
Basis of issue	CTA 50-970
Weight	0.66 lb
Length	5.1 in.
Width	4.75 in.
Height	3.75 in.


Shipping and Storage Data:

Type pack	30/carton
Weight	8 lb
cube	0.50cu ft
Type storage	Warehouse
Drawing number	5-82-13; 5-82-14; 5-1-271

References:

TM 3-4240-280-10
TM 3-4240-280-23&P

BAG, WATERPROOFING, CHEMICAL-BIOLOGICAL MASK: M1 AND M1A1

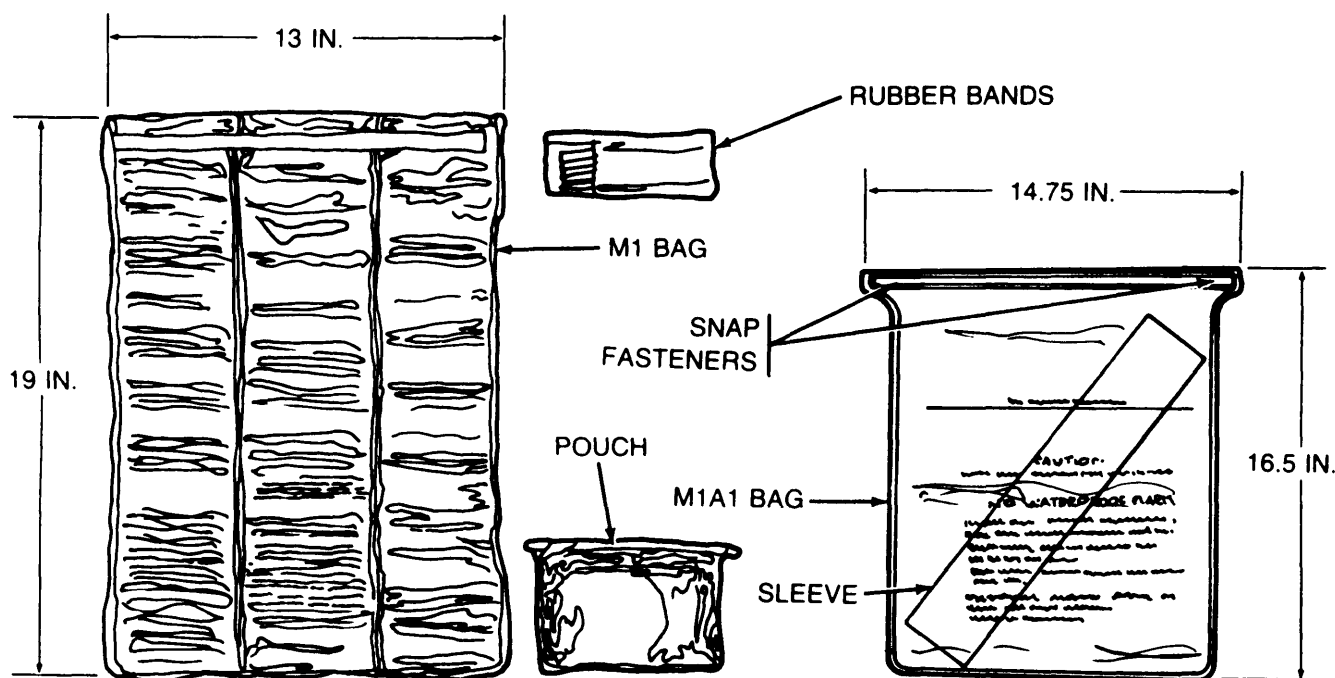*Type Classification:*

Expendable: AMCTC 9512 72

Use:

a. M1 bag.

To protect the M9A1 chemical-biological, special-purpose mask and the ABC-M17, M17A1, and M17A2 chemical-biological field masks from wetting during amphibious operations or other anticipated water immersion.

b. M1A1 bag.

To protect the ABC-M17, M17A1, and M17A2 chemical-biological field masks under conditions of frequent wetting, water immersion, and continuous usage in warm-wet climates.

Description:

a. The M1 bag and its pouch are made of pliable translucent plastic. The bag is 19 inches long and 13 inches wide and folds to about 4 1/2 by 2 1/2 inches for insertion in its pouch.

b. The M1A1 bag is made of pliable translucent plastic. It is 12 1/2 inches by 16 1/2 inches when open. The open end is strengthened by two polyethylene stiffeners sealed into the edges, with snap fasteners at each end of the stiffeners. A plastic sleeve is issued with the bag.

Functioning:

a. M1 bag.

Immediately prior to waterborne operations, each chemical-biological mask is placed in the bag. The rubber bands are used to seal the bag.

b. M1A1 bag.

Prior to river crossings, beach landings, and similar waterborne or riverine operations, each chemical-biological mask is placed in the bag. The bag is sealed by rolling the open end and securing it with the snap fasteners. The sealed mask is then returned to its carrier.

Tabulated Data:

NSN
M14240-00-377-9401
M1A14240-00-803-5839
Unit of issue Each
Basis of issue CTA 50-970
M1 bag:
Length 19 in. (open)
width 13 in. (open)
M1A1 bag:
Length 12.5 in. (open)
width 16.5 in. (open)

Shipping and Storage Data:


M1 bag:
Type pack250 per wooden box
Weight 50 lb

Cube 1.5 cu ft
Type storage Warehouse
Drawing number5-75-2
M1A1 bag:
Typepack20/fibefbmrdr carton,10
cartons/plywood box
Weight 60 lb
cube 3.0 cu ft
Type storage Warehouse
Drawing number5-75-13

References:

TM 3-4240-204-12&P
TM 3-4240-279-10
TM 3-4240-279-20&P

BREATHING APPARATUS, COMPRESSED AIR: M15

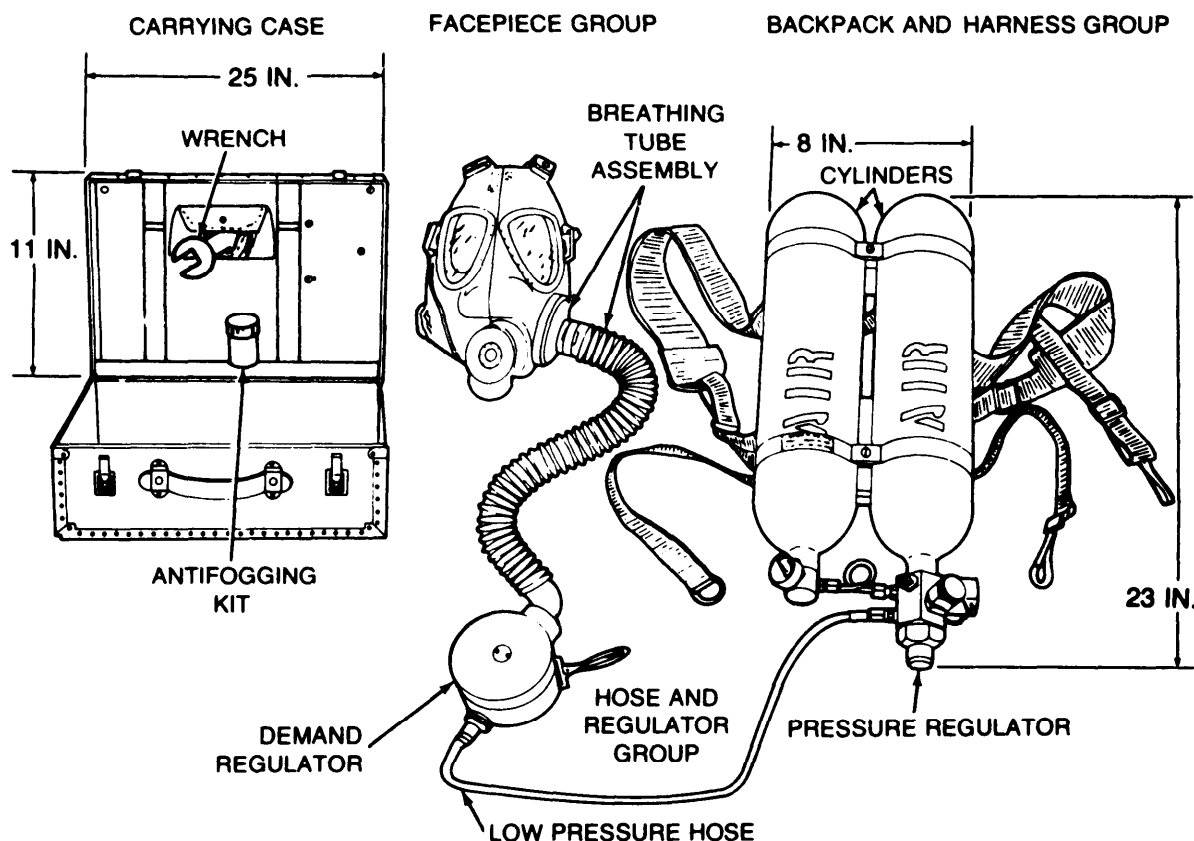*Type Classification:*

STD(LCC-B); CCTC 4119 63

Use:

To supply respirable air for breathing to handlers of liquid guided missile fuels and oxidizers. It is also used to supply air for breathing in an atmosphere which is deficient in oxygen.

Description:

The M15 breathing apparatus consists of a carrying case, facepiece group, a hose and regulator group, a backpack and harness group. The facepiece is a left-cheek canister, medium-size M9 facepiece. The hose and regulator group consists of a breathing tube assembly, a demand regulator, and a low-pressure hose assembly. The accessories include an M1 antifogging kit, a wrench, and a set of operating instructions.

Difference Between Models:

a. There are two models of the M15 breathing apparatus. Both use the same facepiece group.

b. There is a difference in the construction of the breathing tube assembly, demand regulator, and the safety relief valve of each model.

c. Maintenance procedures and some replacement parts for the breathing tube assembly, the demand regulator, the pressure regulator, and the safety relief valve are different for each model.

Functioning:

The apparatus is backpacked. Two compressed gas cylinders contain respirable air for the user. A diaphragm in the demand regulator activates a demand valve that controls airflow through the regulator. When the pressure in the facepiece and breathing tube is below atmospheric pressure (user inhaling), the diaphragm opens the demand valve and low-pressure air flows into the facepiece. Exhaled air flows from the facepiece through the outlet valve.

Limitations:

The M15 breathing apparatus is not authorized for chemical-biobgical agent protection in atmospheres where full impermeable protective clothing is required.

Tabulated Data:

NSN4240-00-04-5435
Line item number C19503
Unit of issue Each
Basis of issue CTA 50-900
M15 breathing apparatus less carrying case:	
Weight 19 lb
Length 23 in.
Width 8 in.
Depth 4 in,

Performance:

Pressure	
In cylinders (full)2,250 psi
From pressure regulator80 psi
From demand regulator Atmospheric

Equivalent volume of fully charged cylinders26 cu ft of air at atmospheric pressure
Maximum continuous use per charging:	
Moderate physical exertion 30 to 45 min
Heavy physical exertion20 min


Shipping and Storage Data:

Type pack Box
Dimensions30 x 14 x 8in
Weight 29-32 lb
Cube 1.9 cu ft
Type storage, Warehouse
Specification number MIL-B-51071

References:

TM 3-4240-224-146P

BREATHING APPARATUS, OXYGEN-GENERATING: M20

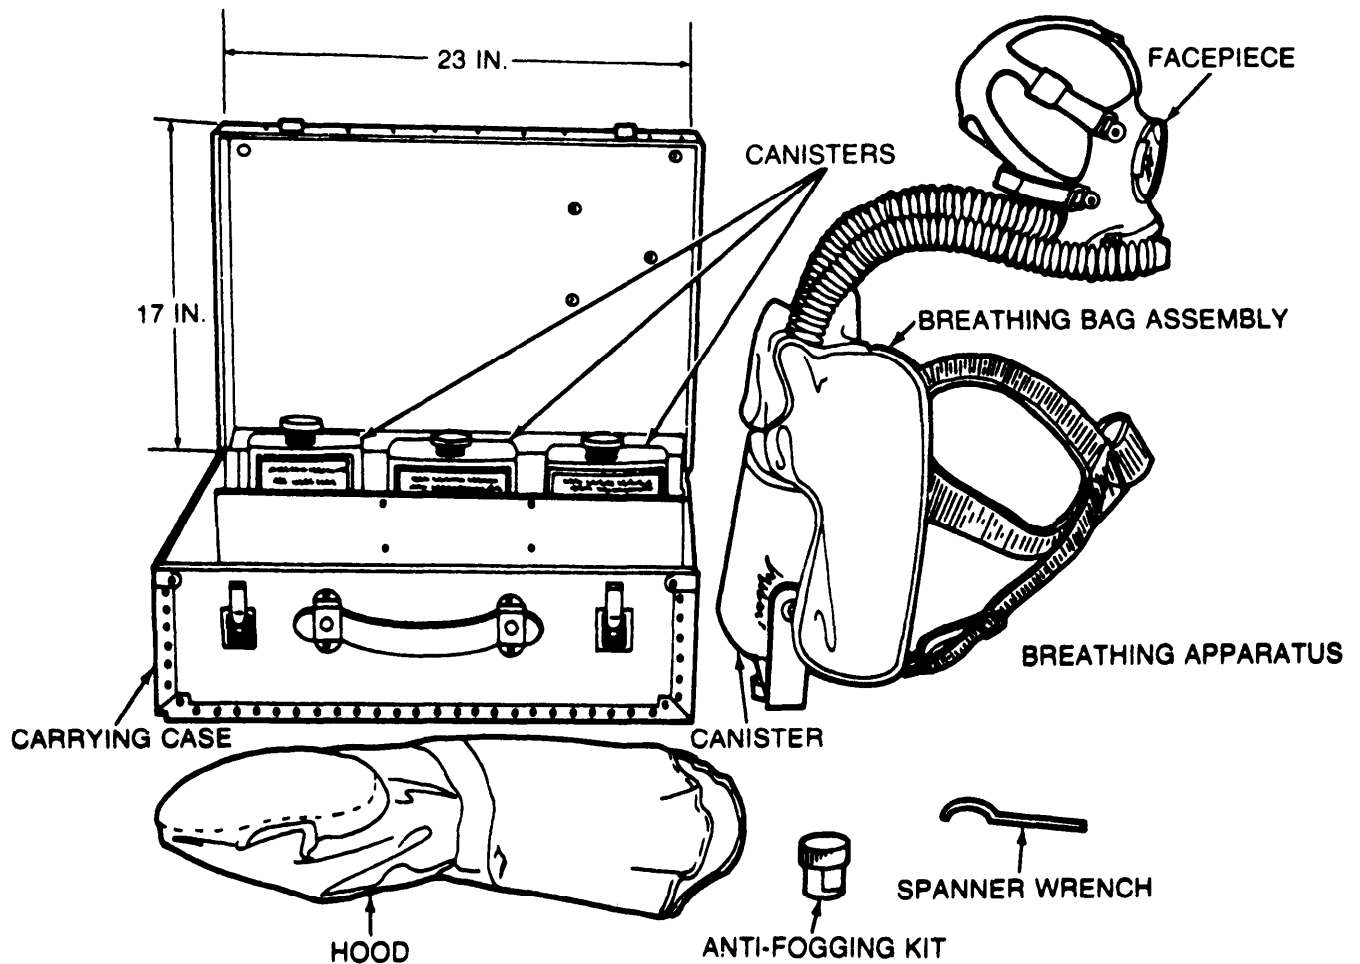*Type Classification:*

STD (LCC-A); CCTC 3628 59

Use:

To supply respirable oxygen for breathing to personnel operating where there is a deficiency of oxygen in the air. It is also used in high concentrations of toxic vapor, gas, dust or smoke, where it is not safe to use an air-purifying filter or canister-type mask.

Description:

The M20 oxygen-generating breathing apparatus consists of a facepiece group, a backplate assembly with a breathing bag and hoses, a harness assembly, and a quick-starting, oxygen-generating canister. The accessories include two spare, quick-starting, oxygen-

generating canisters, an M20 hood made of rubber-coated cloth, an M 1 antifogging kit and a spanner wrench,

Functioning:

The breathing apparatus is backpacked. It removes carbon dioxide and moisture from exhaled breath and generates oxygen to replace that consumed by the operator. Exhaled breath flows from the facepiece valve assembly and through the exhalation breathing tube to the plunger valve assembly. The plunger valve assembly routes the exhaled breath through the canister and into the breathing bag. The quick-starting canister is used under all weather conditions. The M20 hood is worn over the facepiece to protect the head and neck of the user.

Limitations:

- The M20 apparatus is not authorized for:
- a. Chemical-biological agent protection in atmospheres where full impermeable protective clothing is required
 - b. Use in an explosive-gas atmosphere

Tabulated Data:

NSN	4240-00-678-5263
Line item number	C19840
Unit of issue	Each
Basis of issue	CTA 50-909
Carrying case dimensions	23 x 17x 10 in.
Weights:	
Breathing apparatus with canister	18 lb
Carrying case (empty)	13 lb
Carrying case, breathing apparatus, three canisters, and accessories	40 lb

Performance:

Maximum safe, continuous use. 45 minutes from the time the canister begins to generate oxygen. (Permits a safety factor of 15 minutes).



Shipping and Storage Data:

Type pack	Chest
Weight	40 lb
cube	2.2 cu ft
Type storage	Warehouse
Drawing number	MIL-B-5124

References:

- SB 3-4240-2
- TM 3-4240-212-14&P

BREATHING APPARATUS, SELF-CONTAINED: M23 and M23A1

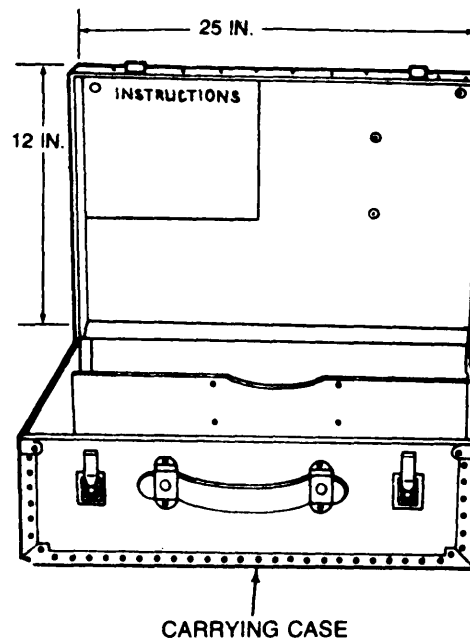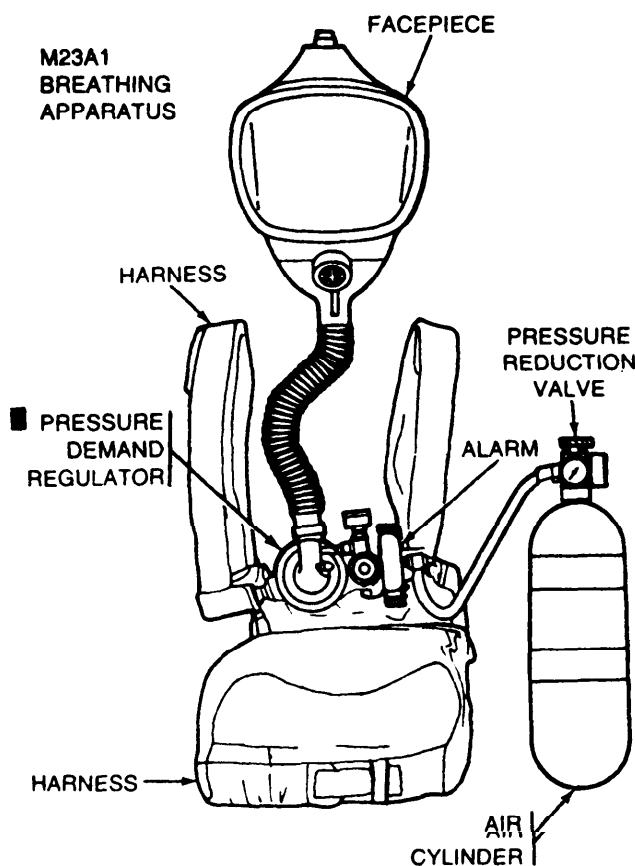*Type Classification:*

M23A1 STD(LCC-A); MSR 02816016
 M23 STD(LCC-B); MSR 02816016

Use:

To supply respirable air for breathing to personnel where there is a deficiency of oxygen in the air or high concentrations of smoke, toxic vapors, or gases.

Description:

The M23A1 breathing apparatus consists of a facepiece, a pressure-demand regulator, a low-pressure audible alarm, a high-pressure hose, a pressure reduction valve, a quick-disconnect high-pressure air cylinder, a harness, and a carrying case. Weights, dimensions, and configurations vary with the manufacturer.

Differences Between Models:

The M23A1 breathing apparatus is a pressure-demand type and has a quick-disconnect air cylinder for rapid replacement. The M23A1 weighs 25 pounds when charged. The M23 breathing apparatus is a demand type. Its air cylinder is installed by using a wrench. The M23 weighs 33 pounds when charged.

Functioning:

The breathing apparatus is backpacked. The air cylinder is pressurized with respirable compressed air at 1,800 psi internal pressure. The pressure-demand regulator delivers a flow of air from the cylinder when the wearer inhales and reduces the flow when the wearer exhales. The pressure-demand regulator maintains positive pressure in the facepiece to prevent leakage of outside contaminated air into the facepiece.

Limitations:

Until an impermeable hood becomes available, the M23 and M23A1 breathing apparatuses are not authorized for chemical-biological protection in atmospheres where full impermeable protective clothing is required.

Tabulated Data:

NSN:
M23A14240 -01-095-0892
M234240-00-880-1728
Line item number C19777
Unit of issueEach
Basis of issue CTA 50-909

Weights:
Breathing apparatus, fully charged:
M23A125 lb
M23 33 lb
Carrying case, empty:
M23A1 metal case12 lb
M23A1plastic case9.5 lb
M23 plastic case14 lb

Performance:
Air cylinder pressure 1,800 psi
Air cylinder capacity514 cu in.


Shipping and Storage Data:
M23A1 breathing apparatus:

Type pack Fiberboard box
Weight 50 lb
Cube1.8 cu ft
Type storage Warehouse
Specification GG-B-675

M23 breathing apparatus:
Type pack Fiberboard box
Weight 60 lb
Cube3.1 cu ft
Type storage Warehouse
Specification GG-B-675

Reference:
SB3-4240-1
TM 43-0001-31

FILTER ELEMENT SET, CHEMICAL-BIOLOGICAL MASK: M13A2

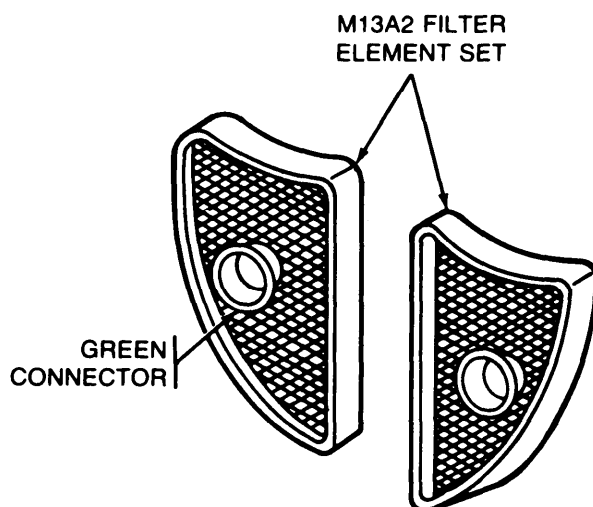

Type Classification:

Expendable: TM authorized

Use:

To filter chemical and biological agents from the air being breathed by the wearer of an M17, M17A1, or M17A2 chemical-biological field mask or Protective Outfit Toxicological Microclimate Controlled (POTMC) in emergencies.

Description:

M13A2 filter elements are made in matched pairs. One filter element is marked right. The other is marked left. Both filter elements are marked with the same lot number. Each filter element consists of a kidney-shaped plastic form, which holds the filter material. The filter material contains activated charcoal and particulate filters. Around green plastic connector is located on each filter element. An inlet valve is mounted in each connector.

Functioning:

The filtering material in the filter elements filters toxic chemical agents, biological agents, and other particles from inhaled air. The connector on each filter element directs the incoming air through the filtering material.

Limitation:

The M13A2 filter element set does not protect against ammonia or carbon monoxide.

Tabulated Data:

NSN 4240-00-165-5026
Unit of issue Set

Basis of issue One set per M17, M17A1, or M17A2 mask and one set per M46 air filter. Two additional sets are authorized for each M17, M17A1, or M17A2 mask

issued to elements of Major Oversea Commands and Joint Readiness Command (USREDCOM).

These extra sets are retained at unit supply level.

Weight 0.40 lb

Performance:

Filters all known chemical, biological, and riot control agents.


Shipping and Storage Data:

Type pack 10 sets per fiberboard box
Weight 5.62 lb
cube 1.03 cu ft
Type storage Warehouse
Drawing number 5-3-1000

References:

FM 21-40
FM 21-41
TM 3-4240-279-10
TM 3-4240-279-20&P
TM 3-4240-294-13&P

HOOD, CHEMICAL-BIOLOGICAL MASK: AIRCRAFT, ABC-M7

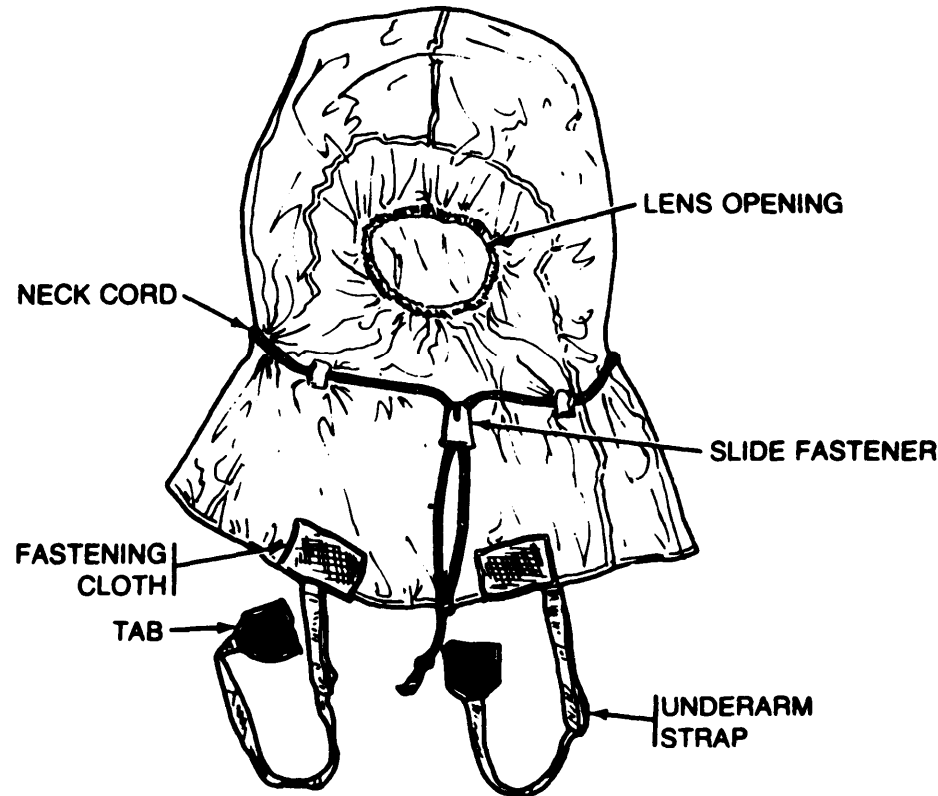

Type Classification:

EXPENDABLE; AMCTC 252164

Use:

To be worn with the M24 aircraft chemical-biological mask to cover and protect the wearer's head and neck against chemical or biological agent and droplets.

Description:

The ABC-M7 aircraft chemical-biological mask hood is a hood made of lightweight butyl-rubber-coated nylon cloth. An opening in the front of the hood is provided for the eyelens.

Functioning:

The butyl-rubber coating on the hood fabric repels vapors and droplets of chemical agents or biological agents.

Tabulated Data:

NSN4240-00-021-8695
Unit of issue Each
Basis of issue CTA 50-970
Weight 0.5 lb


Shipping and Storage Data

Type pack100 per fiberboard box
Weight 20 lb
Cube 3.5 cu ft
Type storage Warehouse
Drawing number LM 5-35-73

References:

TM 3-4240-280-10
TM 3-4240-200-23&P

HOOD, CHEMICAL-BIOLOGICAL MASK: FIELD, ABC-M6A2

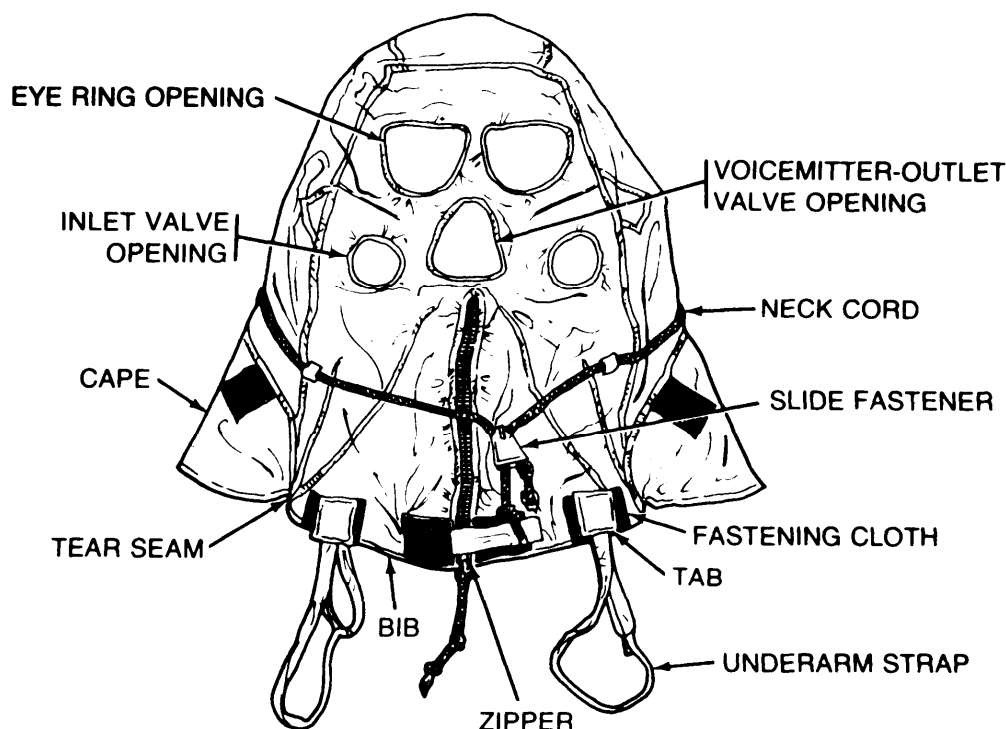*Type Classification:*

Expendable; AMCTC 951272

Use:

To be worn with the ABC-M17, M17A1, or M17A2 field chemical-biological mask to cover and protect the wearer's head and neck against chemical or biological agent vapors and droplets.

Description:

The ABC-M6A2 field chemical-biological mask hood is made of lightweight butyl-rubber-coated nylon cloth. Openings in the front of the hood fit around the mask's eye rings, inlet valves, and voicemitter-outlet valve.

Functioning:

The butyl-rubber coating on the hood fabric repels vapors and droplets of chemical agents or biological agents.

Tabulated Data:

NSN:

M6A24240-00-999-0420

Unit of issue Each

Basis of issue CTA 50-970

Weight0.5 lb

Shipping and Storage Data:

Type pack100 per fiberboard box

Weight 54 lb

Cube3.8 cu ft

Type storage Warehouse

Drawing number:


M6A2 LM 5-35-86

References:

TM 3-4240-279-10

TM 3-4240-279-20&P

HOOD, CHEMICAL-BIOLOGICAL MASK: TANK, ABC-M5

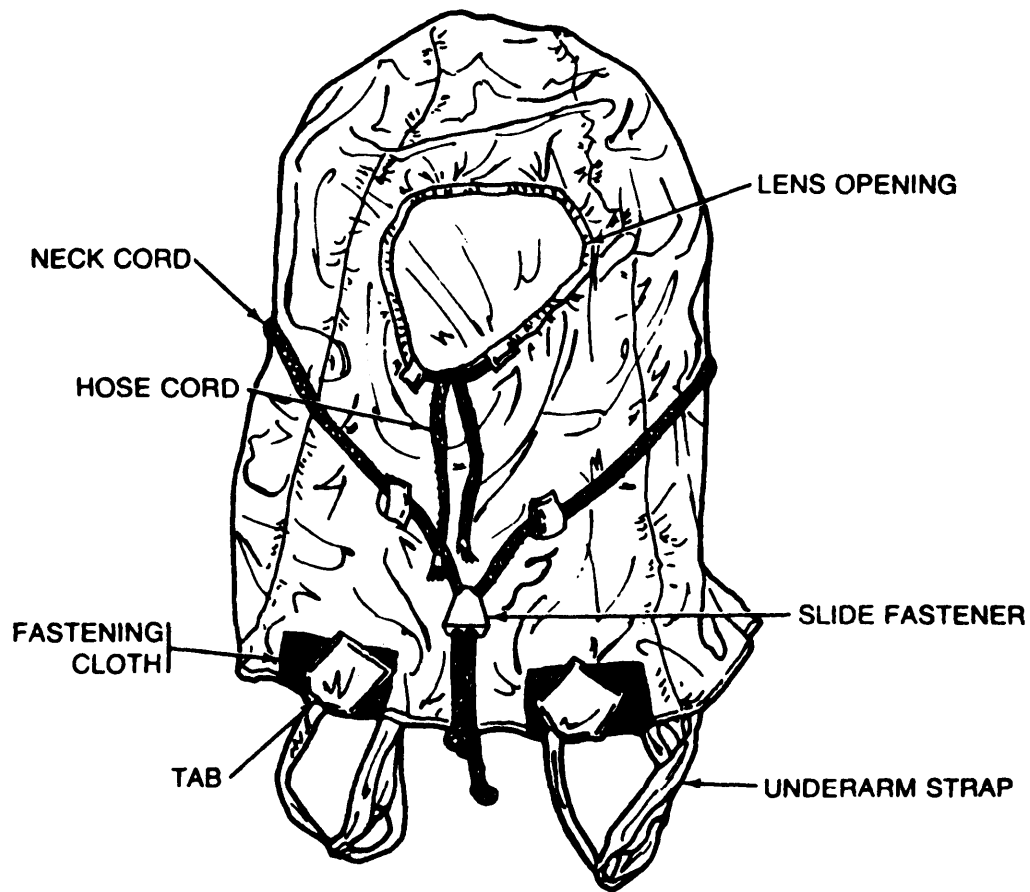*Type Classification:*

Expendable; AMCTC 9512 72

Use:

To be worn with the M25 or M25A1 tank chemical-biological mask to cover and protect the wearer's head and neck against chemical or biological agent vapors and droplets.

Description:

The ABC-M5 tank chemical-biological mask hood is made of lightweight butyl-rubber-coated nylon cloth. An opening in the front of the hood is provided for the eyelens. It fits in back of the inlet stem and around the eyelens frame. Adjustable underarm straps at the bottom edge of the hood hold it in position on the shoulders.

Functioning:

The butyl-rubber coating on the hood fabric repels

vapors and droplets of chemical agents or biological agents.

Tabulated Data:

NSN4240-00-860-8987
Unit of issue Each
Basis of issue CTA 50-970
Weight0.4 lb


Shipping and Storage Data:

Type pack 10 per fiberboard box
Weight 6 lb
cube 0.8 cu ft
Type storage Warehouse
Drawing number LM5-35-59

References:

TM 3-4240-280-10
TM 3-4240-280-23&P

MASK, CHEMICAL-BIOLOGICAL: AIRCRAFT, ABC-M24

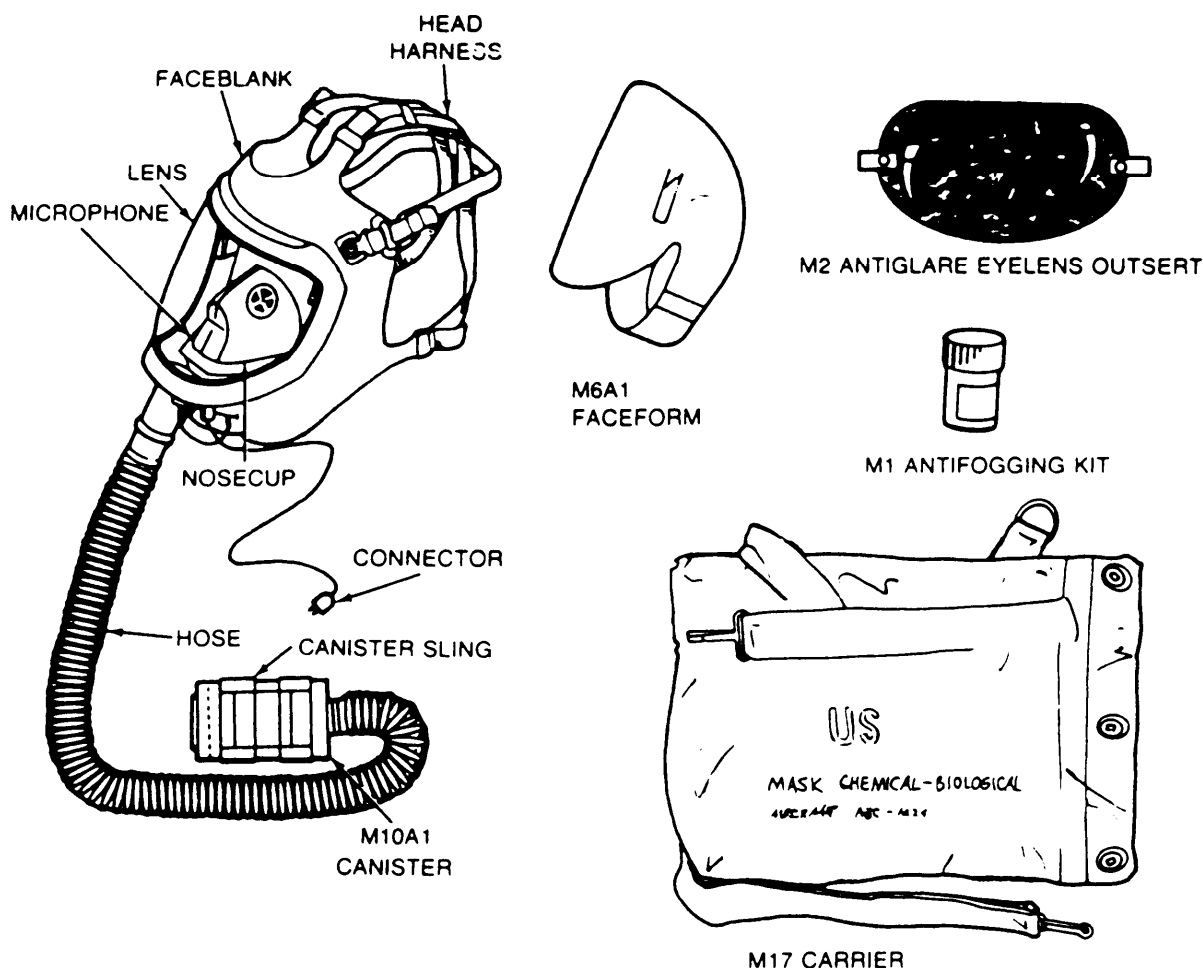

Type Classification:

STD (LCC-A); CCTC 4075 62

Use:

To protect the face, eyes, and respiratory tract of aircraft crew members from concentrations of chemical, biological, and riot control agents.

Description:

The ABC-M24 aircraft chemical-biological mask consists of a facepiece connected to an M10A1 canister by a 2-foot long corrugated hose. An M133/U microphone is installed in the mask facepiece. An M6A1 faceform is stowed in the facepiece to keep it from being distorted during storage. A canvas M17 carrier is provided with each mask for storing and carrying the mask and its accessories. An M2 antiglare eyelens and an M1 antifogging kit are issued with each mask. The mask is issued in three sizes: small, medium, and large.

Functioning:

Inhaled air passes through the canister and hose into the facepiece. Exhaled air is discharged through an outlet valve at the chin position of the mask.

Limitations:

Except when connected to the oxygen supply system or to an oxygen bailout bottle by an ABC-M8 adapter:

- The mask does not protect the wearer from ammonia or carbon monoxide.
- The mask is not effective where the amount of oxygen in the air is too low to support life.

Tabulated Data:

NSN:

Small	4240-00-808-8799
Medium	4240-00-776-4384
Large	4240-00-808-8798

Line item number. M11621
 Unit of issueEach
 Basis of issue TOE/MTOE/TDA; AR 310-34
Weight (with carrier) 6.25 lb
Dimensions (in carrier) 4.00 x 12.00 x 12.00 in.

Performance:

Filters all known chemical, biological, and riot control agents. The M10A1 canisters are replaced in accordance with the criteria in TM 3-4240-260-10 and 20&P.

Shipping and Storage Data:


Type pack10 per fiberboard box
 Weight65 lb

Cube..... 5.7 cu ft
 Type storage. Warehouse
 Drawing number
 Small.....LM 5-1-296-10
 Medium LM 5-1-296-20
 Large. LM 5-1-206-30

References:

TM 3-4240-280-20
 TM 3-4240-280-10
 TM 3-4240-280-20&P

MASK, CHEMICAL-BIOLOGICAL: AIRCRAFT, M43

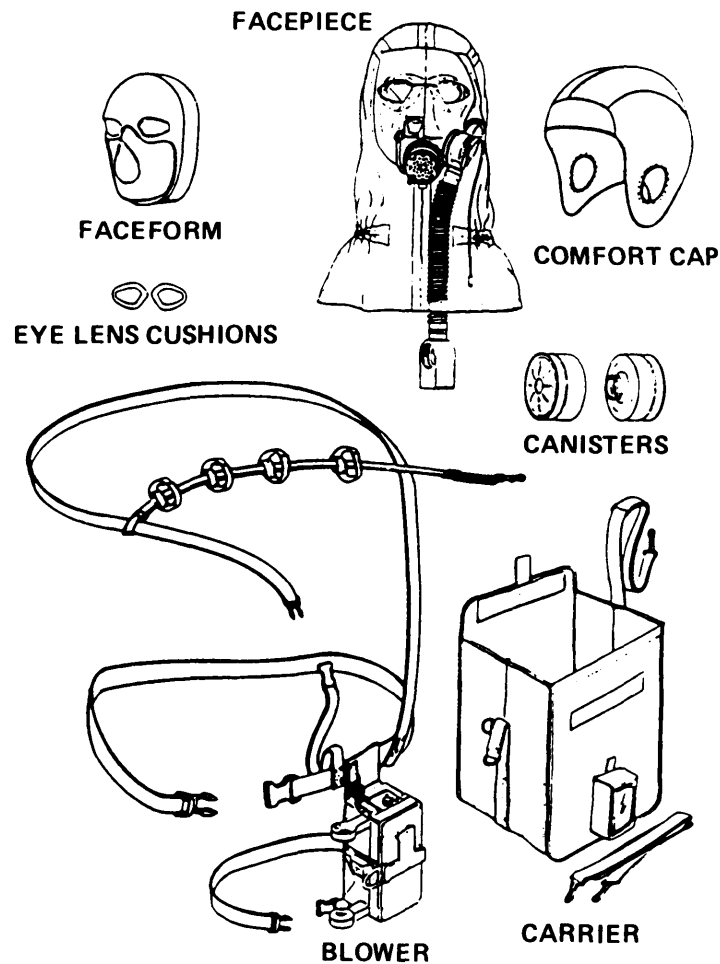*Type Classification:*

LP (LCC-U); MSR 02876006

Use:

Protects face, eyes, and respiratory system from field concentrations of chemical-biological agents, and riot control agents.

Description:

The M43 aircraft mask consists of a facepiece with integral hood connected to canisters and blower by corrugated hose. An MI 71/AIC or M133/U microphone, mounted in the facepiece allows interface with aircraft communication

systems. The facepiece is also equipped with voicemitter, drink tube, and optically correct lenses. The blower assembly is secured to the user by a harness for hands free operations outside the aircraft. A faceform holds the facepiece in proper shape when stored longer than 30 days. The M43 mask may be used with the Integrated Helmet and Display Sighting System (IHADSS). A comfort cap is provided to eliminate the need to adjust helmet when M43 facepiece is not worn. A canvas carrier is provided with each mask for storing and carrying the mask and its accessories. The mask is issued in four sizes: small, medium, large, and extra large.

Functioning:

The blower pushes air into the canisters, maintaining a positive pressure in the facepiece. The blower is powered by either a self-contained lithium battery or aircraft power when installed in mounting bracket. the blower has a motor speed control, low battery power indicayor, easily charged battery, and easily operated release-from-aircraft mechanism. Inlet airflow is directed by an inlet valve to cooling ducts, lens defog system, and breathing air. Two controls mounted on the inlet valve regulate flow to the cooling duct and air distribution system. Exhaled air is expelled through the outlet valve assembly.

Limitations:

The M43 mask does not protect against ammonia or carbon monoxide gas. The mask is not effective where the amount of oxygen in the air is too low to support life. The mask is not to be used in ejection seat equipped aircraft. The mask is not to be used for high altitude, low pressure flight requiring crew member supplemental oxygen.

Tabulated Data:

NSN:

Type I

Small	4240-01-208-6966
Medium.....	4240-01-208-6967
Large.....	4240-01-208—6968
Extra Large.....	4240-01-208-6969

Type II

small	4240-01-265-2677
Medium.....	4240-01-265-2679
Large.....	4240-01-265-2678
Extra Large	4240-01-265-2680

Line item number	M12350.
Unit of issue	Each
Basis of issue.....	TOE/MTOE/TDA
Weight (with carrier)	12.3 lb

Performance:

Protects against chemical, biological, and riot control agents. Canisters are replaced in accordance with criteria in TM 3-4240-312-12&P.

Difference Between Models:

Type I mask:

Right lens in facepiece is notched for use with helmet dsplay unit. Uses M171/AIC microphone.

Type II mask:

Both lenses are spherical. Use M133/U microphone.

Shipping and Storage Data:

Type Pack	One per plywood container
Weight	31.2 lb
Dimensions	25.6 x 17.3x 14.7 in.
cube.....	3.77 cu ft
Type Storage.....	Warehouse
Specification	MIL-STD-2073
Drawing	P5-1-1300-10

Temporary Storage (less than 30 days)

Temperatures remain between -25°F and + 125°F (-31.7°C and +51.7°C).


Extended Storage (30 days or more)

Temperatures remain between -60°F and +160°F(-51.1°C and +71.1°C)

References:

TM 3 4240-312-12&P

MASK, CHEMICAL-BIOLOGICAL: COMBAT VEHICLE, M42

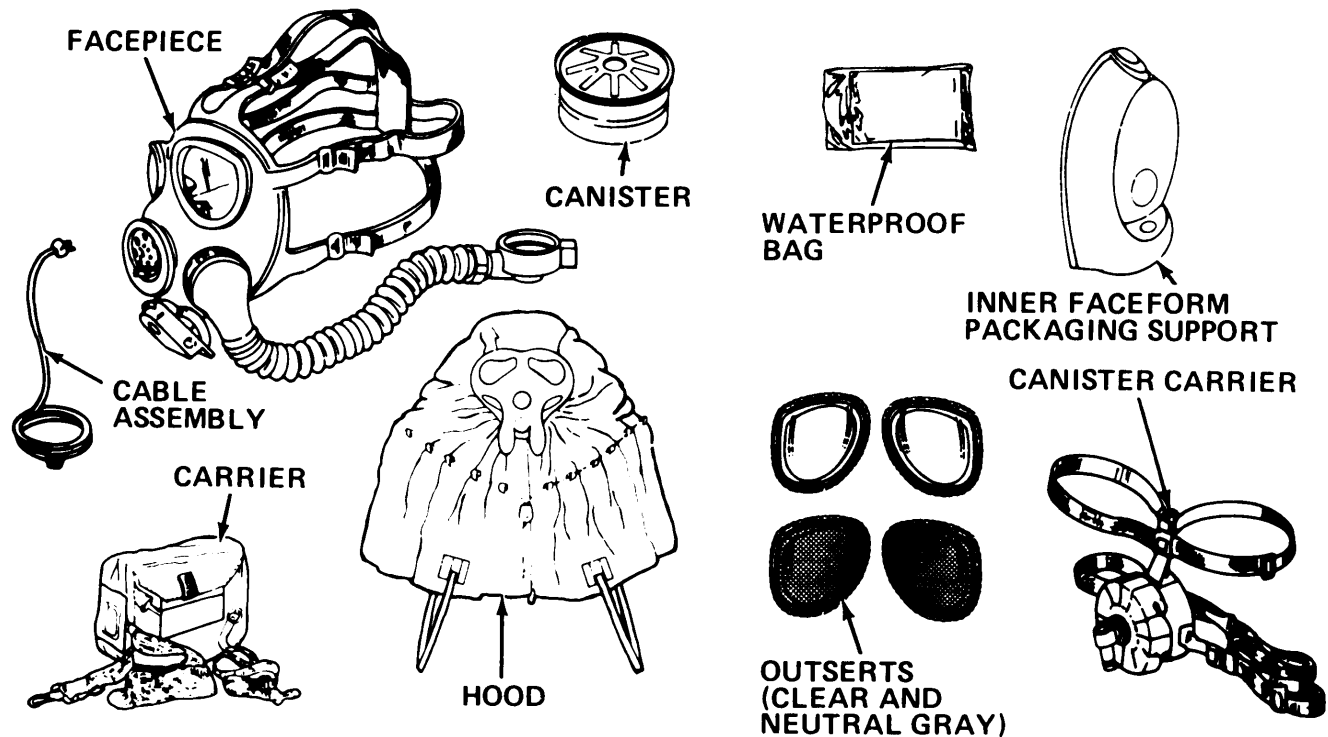*Type Classification:*

STD (LCC-A); MSR 11876009

Use:

Protects face, eyes, and lungs from field concentrations of chemical-biological agents, toxins, and radioactive fallout particles.

Description:

The M42 mask consists of a silicone rubber facepiece connected to a filter canister (with carrier), or directly to the vehicle collective protection equipment, by corrugated hose. A microphone and cable, mounted in the facepiece, allows interface with vehicle communication system. The facepiece is also equipped with front and side voicemitters, drink tube, and eyelenses. Clear and neutral gray outserts protect the eyelenses and reduce glare and lens fogging. A hood, not permanently attached to the facepiece, provides protection of the head and neck. A canvas carrier is provided with each mask for storing and carrying the mask and its accessories. A waterproof bag is provided for temporary storage of the facepiece when required

by climate and mission. A faceform holds the facepiece in proper shape when stored longer than 30 days. The mask is issued in three sizes: small, medium, and large.

Functioning:

The silicone rubber facepiece fits closely against the face to form a seal. Air enters the canister, passes through a hose, and through an air deflector into the eye area of facepiece. The canister filters out CB agents, toxins, and radioactive particles. From the eye area, air enters a nosecup and is inhaled through the nosecup valves. Exhaled air passes through the nosecup area and is expelled through an outlet valve. Outserts are fitted with a rubber ring which hold them securely to the facepiece eyelenses. Optical inserts, available by medical prescription, are required for personnel who must wear glasses.

Limitations:

The M42 mask does not protect against ammonia or carbon monoxide. The mask is not effective where the amount of oxygen in the air is too low to support life.

Tabulated Data:

NSN:	
Small	4240-01-258-0064
Medium	4240-01-258-0065
Large	4240-01-258-0066
Line item number	M18526
Unit of issue	Each
Basis of issue	TOE/MTOE/TDA
Weight (with carrier)	4.53 lb
Dimensions (in carrier)	9.0 x 11.0 x 4.5 in.

Performance:

Protects against chemical, biological, toxins, and radioactive fallout particles. Canisters are replaced in accordance with criteria in TM 3-4240-300-20&P.

Shipping and Storage Data:


Instructions for storage and shipment are provided in TM 3-4240-300-20&P.

Type Pack	8 fiberboard boxes
	per fiberboard or plywood container
Weight	9.1 lb
Dimensions	11.9 x 11.8x9.2 in.
cube	0.747 cu ft
Storage	Cool dry place (40°F to 70°F)
Specification	MIL-STD-2073
Drawing	P5-1-1533-30


References:

- TM 3-4240-400-10-2
- TM 3-4240-300-20&P


MASK, CHEMICAL-BIOLOGICAL: FIELD, ABC-M17, M17A1 , M17A2

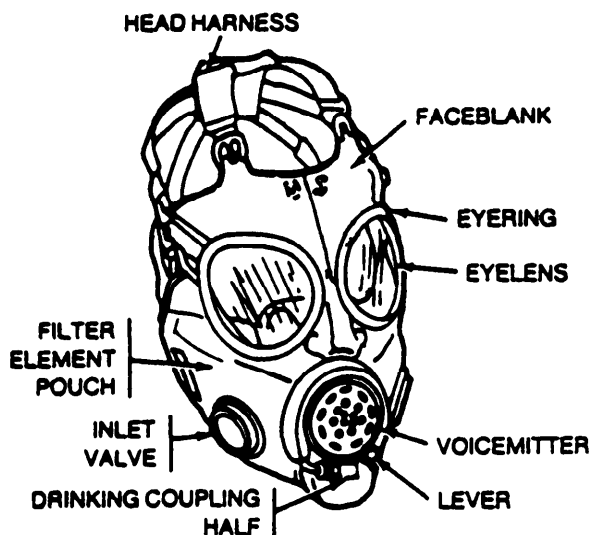


M17A1/M17A2 MASK

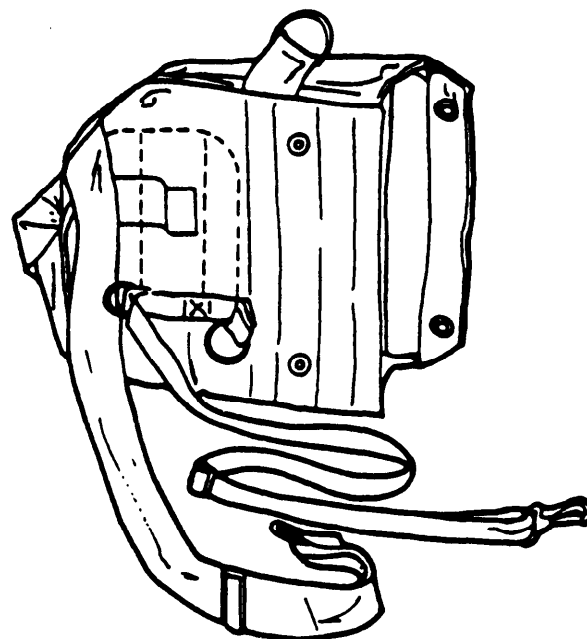


M15A1 CARRIER



FILTER ELEMENT SET



EYELENS OUTSERTS



M1 WATERPROOF BAG

Type Classification:

M17A2STD (LCC-A); MSR 03836001
 M17A1STD (LCC-B); MSR 03836001
 ABC-M17CON (LCC-S); AMCTC 4664 66

Use:

To protect the face, eyes, and respiratory tract of the wearer from field concentrations of chemical, biological, and riot control agents.

Description:

The M17-series field chemical-biological masks consist of a facepiece with two replaceable filter elements inserted in the cheek pouches and a canvas M15A1 carrier. An M1 chemical-biological

mask water-proofing bag and a pair of eyelenses outserts are issued with each mask and are stored in the carrier. The masks are issued in three sizes: small, medium, and large,

Differences Between Models:

The M17A2 voicemitter-outlet valve assembly contains a coated diaphragm to protect against DS2 decontaminating agent and is equipped with a drinking system.

The M17A1 voicemitter-outlet valve assembly is equipped with a drinking system and a resuscitation system.

The ABC-M17 mask is not equipped with these systems.

Functioning:

Inhaled air passes through inlet valves into the filter elements, which remove chemical, biological, or riot control agents from the air being breathed. Filtered air from the pouches passes through deflector tubes and across the inner surfaces of the eye-lenses to keep them free of condensation. Air then passes through the nosecup valves. Exhaled air is discharged through the outlet valve. The eyelenses' outserts are installed over the eyelenses to protect them from scratching.

Limitations:

The masks do not protect the wearer from ammonia or carbon monoxide. The masks are not effective where the amount of oxygen in the air is too low to support life.

Tabulated Data:

NSN:

M17A2 Extra small	4240-01-143-2017
M17A2 Small	4240-01-143-2018
M17A2 Medium	4240-01-143-2019
M17A2 Large	4240-01-1-2020
M17A1 Small	4240-00-926-4199
M17A1 Medium	4240-00-926-4201
M17A1 Large	4240-00-926-4200
ABC-M17 Small	4240-00-5424450
ABC-M17 Medium	4240-00-5424451
ABC-M17 Large	4240-00-542-4452
Line item number	M11895
Unit of issue	Each

Basis of issue.....TOE/MTOE/TDA;
AR 310-34

Weight (with carrier):

M17A1/M17A2	3.11 lb
ABC-MI 7	2.93 lb
Dimensions (in carrier)	5.50 x 7.50 x 11.00 in.

Performance:

Filters all known chemical, biological, and riot control agents.

Shipping and Storage Data:

Type pack 10 per fiberboard
or wooden box

Fiberboard box:

Weight	46 lb
cube	3.30 cu ft

Wooden box:

Weight	66 lb
cube	4 cu ft

Type storage.....Warehouse


Drawing number:

M17A2	5-1-552
M17A1	5-1-551
ABC-M17	5-1-292

References:

TM 34240-279-10
TM 34240-279-20&P

MASK, CHEMICAL-BIOLOGICAL: FIELD, M40

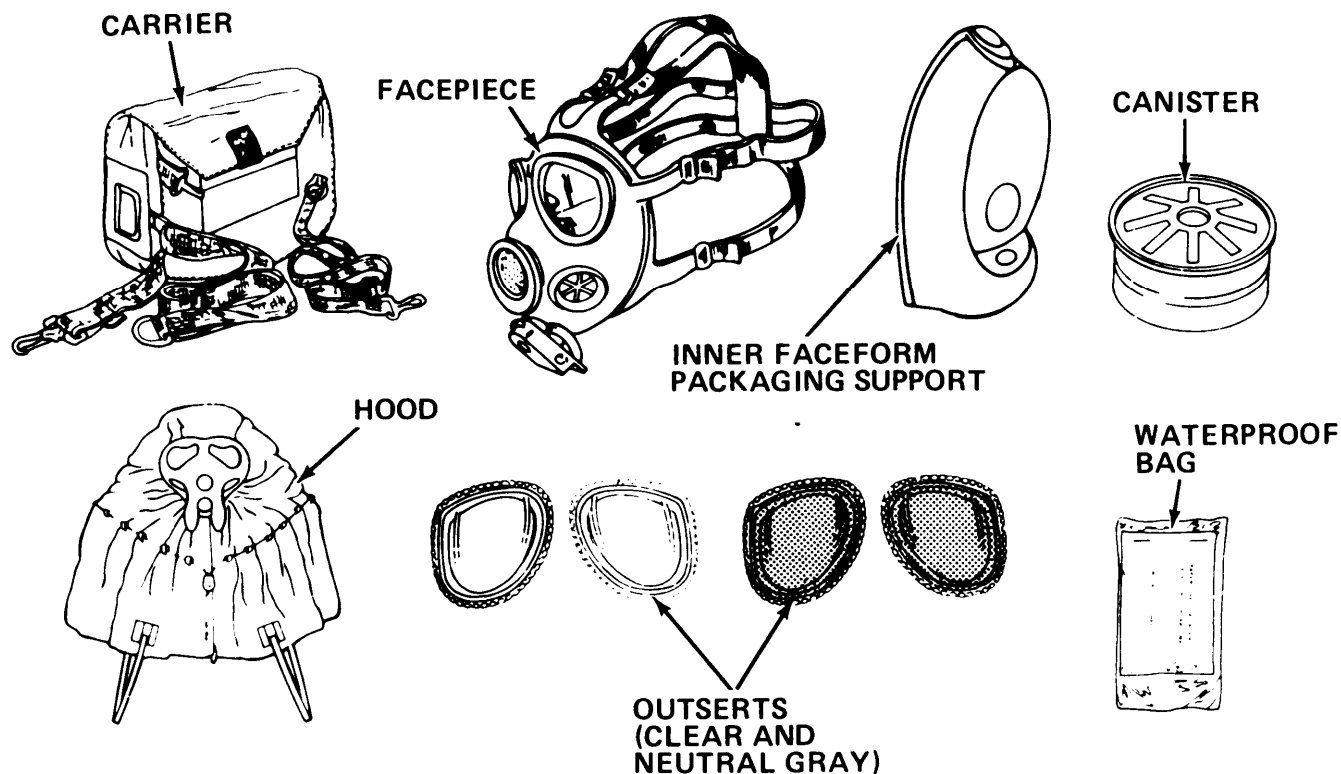*Type Classification:*

STD (LCC-A); MSR 11876009

Use:

Protects face, eyes, and lungs from field concentrations of chemical-biological agents, toxins, and radioactive fallout particles.

Description:

The M40 mask consists of a silicone rubber facepiece with a filter canister. The facepiece is equipped with front and side voicemitters, drink tube, and eyelenses. Clear and neutral gray outserts protect the eyelenses and reduce glare and lens fogging. A hood, not permanently attached to the facepiece, provides protection of the head and neck. A canvas carrier is provided with each mask for storing and carrying the mask and its accessories. A waterproof bag is provided for temporary storage of the facepiece when required by climate and mission. A faceform holds the facepiece in proper shape when stored longer than 30 days. The mask is issued in three sizes: small, medium, and large,

Functioning:

The silicone rubber facepiece fits closely against the face to form a seal. Air enters the canister and passes through an air deflector into the eye area of the facepiece. The canister (screwed on to either the left or right side of the facepiece) filters out CB agents, toxins, and radioactive particles. From the eye area, air enters a nosecup and is inhaled through the nosecup valves. Exhaled air passes through the nosecup area and is expelled through an outlet valve. Outserts are fitted with a rubber ring which hold them securely to the facepiece eyelenses. Optical inserts, available by medical prescription, are required for personnel who must wear glasses.

Limitations:

The M40 mask does not protect against ammonia or carbon monoxide. The mask is not effective where the amount of oxygen in the air is too low to support life.

Tabulated Data:

NSN:

Small4240-01-258-0061
 Medium4240-01-258-0062
 Large.....4240-01-258-0063
 Line item number.....M12418
 Unit of issueEach
 Basis of issue.....TOE/MTOE/TDA
 Weight (with carrier)4.53 lb
 Dimensions (in carrier)9.0 x 11.0 x 4.5 in.

Performance:

Protects against chemical, biological, toxins,
 and radioactive fallout particles. Canisters are
 replaced in accordance with criteria in TM 3-4240-
 300-20&P.

Shipping and Storage Data:


Instructions for storage and shipment are
 provided in TM 3-4240-300-20&P.

Type Pack8 fiberboard boxes per
 fiberboard or plywood container
 Weight.....8.0 lb
 Dimensions.....11.9 x 11.8x9.2 in.
 cube0.747 cu ft
 Storage Cool dry place (40°F to 70°F)
 SpecificationMIL-STD-2073
 DrawingP5-1-1000-30


References

TM 3-4240-300-10-1
 TM 3-4240-300-20&P


MASK, CHEMICAL-BIOLOGICAL: SPECIAL-PURPOSE, M9 AND M9A1

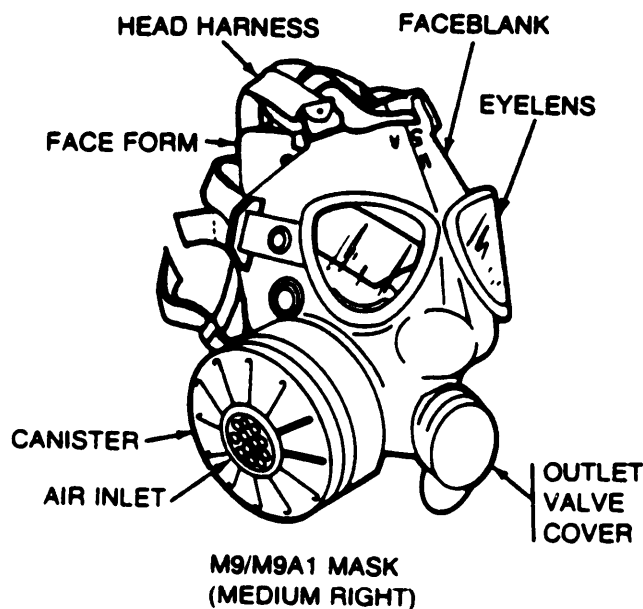

**M9/M9A1 MASK
(MEDIUM RIGHT)**

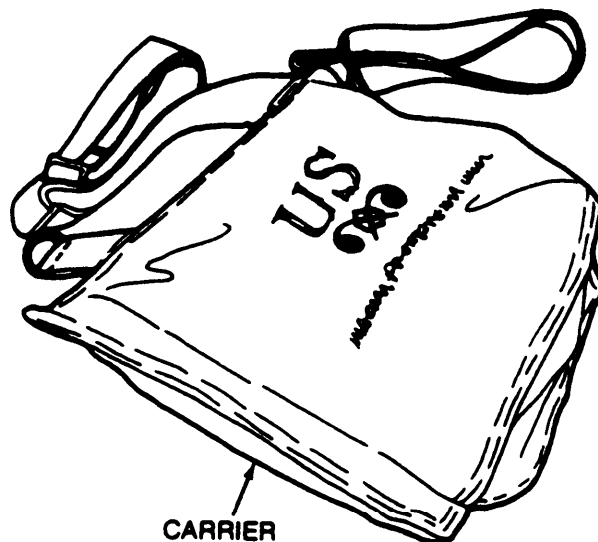

CARRIER

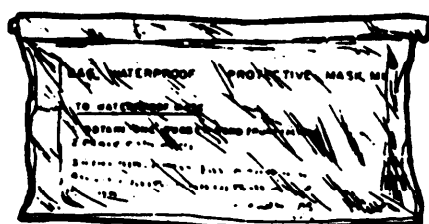

M1 WATERPROOFING BAG



Type Classification:

M9A1STD(LCC-B);AMCTC550867
M9STD (LCC-B); AMCTC 567967

Use:

To protect the face, eyes, and respiratory tract of the wearer from concentrations of chemical, biological, and riot control agents.

Description:

The M9 and M9A1 special-purpose chemical-biological masks consist of an M9 facepiece assembly, an M11 canister, and a carrier. The M11 canister is a metal cylinder containing a particulate filter and activated charcoal. The masks are issued in three sizes: small, medium, and large. An M1 antifogging kit and M1 waterproofing bag are issued with the mask and stored in the carrier.

Difference Between Models:

The only difference between the M9 and the M9A1 masks is their carriers.

Functioning:

Inhaled air enters and passes through the canister which removes chemical, biological, or riot control agents from the air being breathed. Filtered air passes from the canister through the inlet valve in the canister mounting and into the facepiece. The inlet valve allows filtered air to enter the facepiece but prevents exhaled air from flowing out through the canister. Filtered air passes from the inlet valve through the deflector tubes, which direct the air across the eyelenses to keep them free of condensation. Air then passes through the nosecup valves. Exhaled air is discharged through the outlet valve. The outlet valve allows exhaled air to leave the facepiece but prevents contaminated air from entering.

Limitations:

The mask does not protect the wearer from ammonia or carbon monoxide. It is not effective where the amount of oxygen in the air is too low to support life.

Tabulated Data:

NSN (by size, canister mounting, and model):			
	Left cheek		Right cheek
Size	Canister	Mounting	Canister Mounting
Small	4240-00-368-6092		4240-00-368-6091
		(M9)	(M9)
	4240-00-368-6097		4240-00-368-6098
Medium		(M9A1)	(M9A1)
	4240-00-368-6090		4240-00-368-6089
		(M9)	(M9)
Large	4240-00-368-6095		4240-00-368-6096
		(M9A1)	(M9A1)
	4240-00-368-6088		4240-00-368-6087
		(M9)	(M9)
	4240-00-368-6093		4240-00-368-6094
		(M9A1)	(M9A1)



Line item numberM11689
 Unit of issue Each
 Basis of issueTOE/MTOE/TDA;
 AR 310-34

Performance:
 Filters all known chemical, biological, and riot control agents.

Shipping and Storage Data:
 Type pack6 per wooden box
 Weight 56 lb
 Cube3.3 cu ft
 Type Storage.....Warehouse
 Drawing number.....5-1-276 and 277

References:
 TM 3-4240-204-12&P

MASK, CHEMICAL-BIOLOGICAL: TANK ABC-M25A1

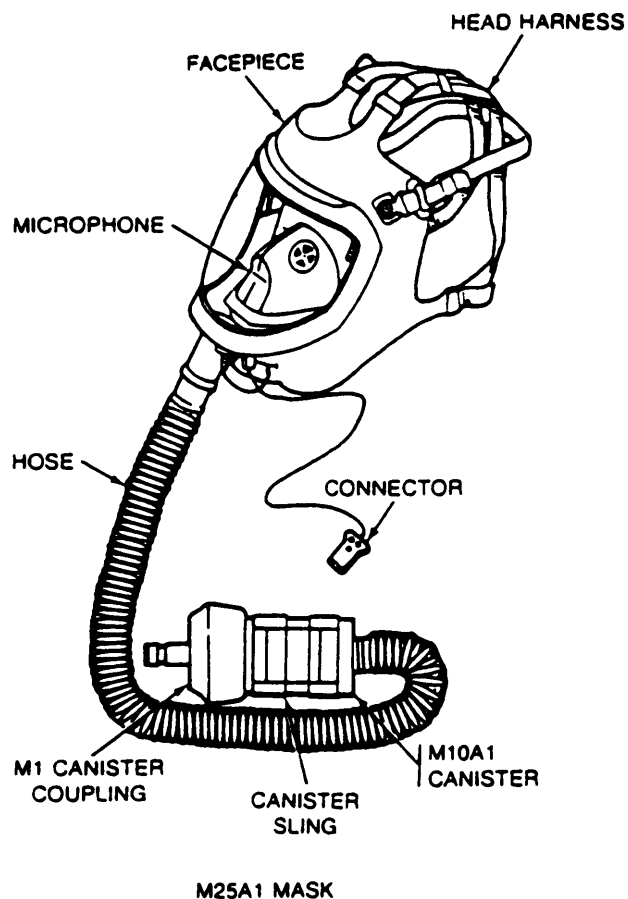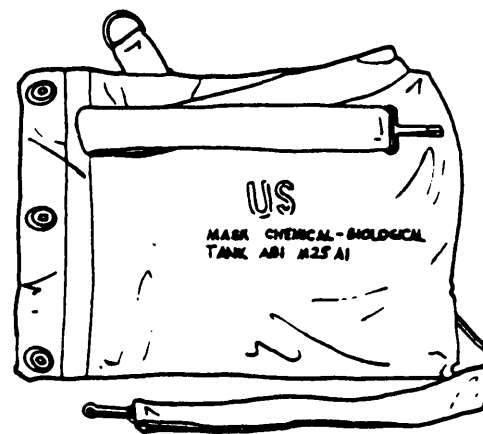M6A1
FACEFORMM1
ANTIFOGGING KIT

M13A1 CARRIER

Type Classification:

ABC-M25A1STD(LCC-B); CCTC 4115 63

Use:

To protect the face, eyes, and respiratory tract of armored vehicle crew members from concentrations of chemical, biological, and riot control agents.

Description:

The ABC-M25A1 tank chemical-biological masks each consist of a facepiece connected to an M10A1 canister by a 2 foot long corrugated hose. An M1 canister coupling is attached to the inlet valve end of the canister. An M116G microphone is installed in the mask facepiece. The masks are issued in three sizes: small, medium, and large. An M1 antifogging kit and an M6A1 faceform are issued with the mask and stored in the M13A1 carrier.

Functioning:

a. Inhaled air passes through the canister and hose into the facepiece. Exhaled air is discharged through an outlet valve at the chin position of the mask.

b. The M1 canister coupling connects with a quick-disconnect coupling on each air hose leading from the armored vehicle gas-particulate filter unit. The fitter unit delivers filtered, pressurized air through the M10A1 canister to the facepiece. The microphone in the mask facepiece is used to communicate with other crew members and armored vehicles in its radio network. A connector on the microphone plugs into the armored vehicle's communication system.

c. The mask may be worn outside the tank with the canister fastened inside the carrier or using the canister carrying sling.

Limitations:

The masks do not protect the wearer from ammonia or carbon monoxide. They are not effective where the amount of oxygen is too low in the air to support life.

Tabulated Data:

NSN:

M25A1 Small 4240-00-994-8751

M25A1 Medium 4240-00-994-8750

M25A1 Large 4240-00-994-6752

Line item number. M10936

Unit of issue Each

Basis of issue TOE/MTOE/TDA
AR310-34

Weight (with carrier) 6.25 lb

Dimensions (in carrier) 6.50 x 10.75 x 12.40 in.

Performance:

Filters all known chemical, biological, and riot control agents.

Shipping and Storage Data:

Type pack 10 per fiberboard box

Weight 65 lb
cube. 5.7 cu ft

Type storage Warehouse

Drawing number LM 5-1-325

References:


TB 3-4240-280-20

TM 3-4240-280-10

TM 3-4240-280-20&P

TM 750-162

WINTERIZATION KIT, CHEMICAL-BIOLOGICAL MASK: M1

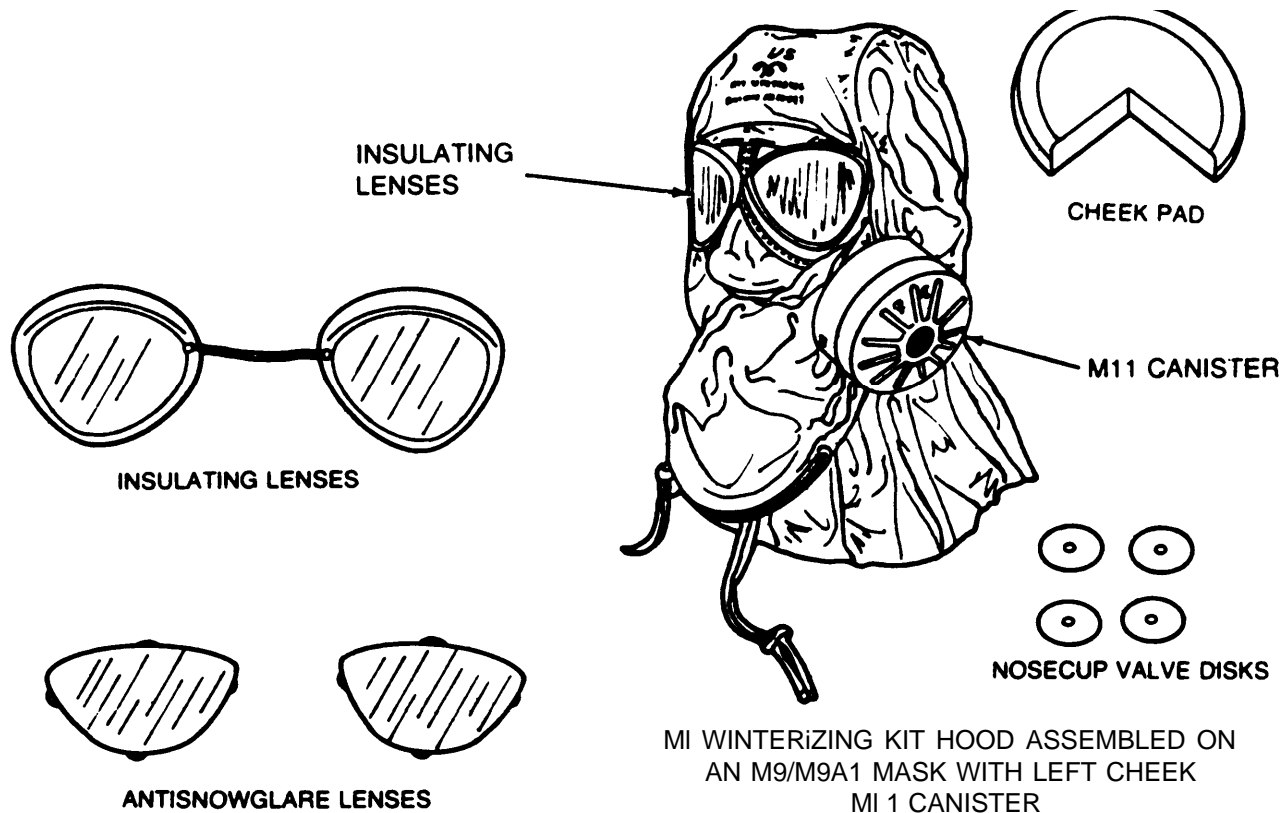

Type Classification:
Expendable; AMCTC 9512 72

Use:
To winterize the M9 and M9A1 special-purpose chemical-biological masks, so that they can be worn in extremely cold weather. The hood of the kit also protects the wearer's head and neck against chemical or biological agent vapors and droplets.

Description:
The M1 CB mask winterizing kit consists of a hood, a pair of insulating lenses, a pair of anti-snow glare lenses, a cheek pad, and a plastic bag containing four spare nosecup valve disks. The hood is made of nylon and coated on both sides with butyl-rubber.

Functioning:
When installed on an M9 or M9A1 mask, the hood covers the wearer's head and the lower portion of the facepiece; the insulating lenses cover the lenses inside the facepiece. The anti-snow glare lenses are installed over the lenses of the mask, and the cheek pad insulates the wearer's face from the metal canister mounting.


Tabulated Data:
NSN:
With hood for left
cheek canister 4240-00-321-2080
With hood for right cheek
canister 4240-00-542-5607
Unit of issue Each
Basis of issue CTA 50-970
Weight 0.7 lb
Dimensions (folded) 6 x 4.5 x 2in.

Performance:
Makes the M9 or M9A1 mask wearable at temperatures down to minus 40 degrees Fahrenheit.

Shipping and Storage Data:
Type pack 72 per wooden box
Weight 79.5 lb
cube 3.2 cu ft
Type storage Warehouse
Drawing number 5-74-65

References:
TM 3-4240-204-12&P

WINTERIZATION KIT, CHEMICAL-BIOLOGICAL MASK: M3

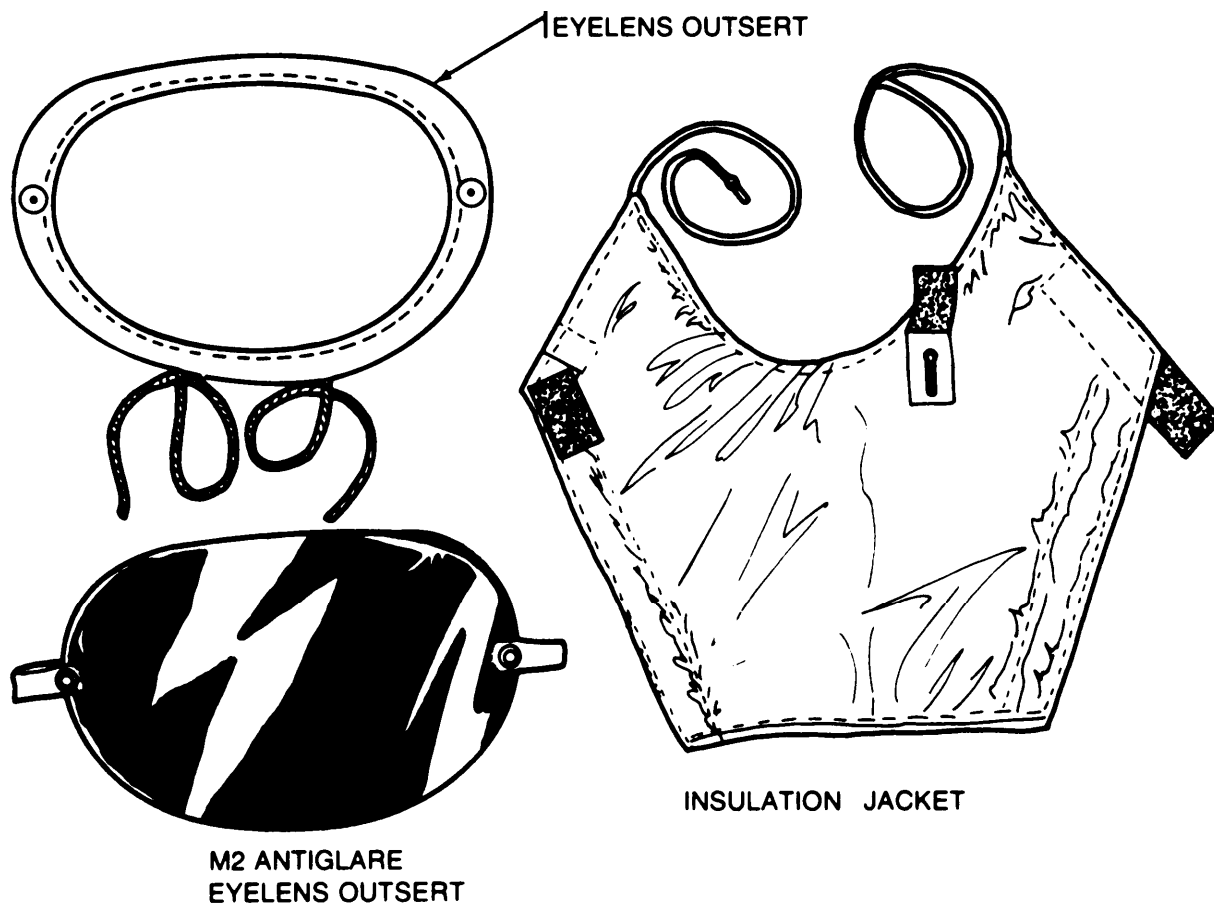

Type Classification:

Expendable; AMCTC 9512 72

Use:

To winterize the M24 aircraft chemical-biological mask and the M25 and M25A1 tank chemical-biological masks, so that they can be worn in extremely cold weather.

Description:

The M3 winterization kit consists of a winterization eyelens outsert, an insulating jacket, and an M2 anti-glare eyelens outsert.

Functioning:

The winterization eyelens outsert prevents frost from covering the eyelens of the mask. The insulating jacket consumes heat inside the facepiece of the mask. The anti-glare eyelens outsert reduces sunglare. When the kit is not in use, it is stored in the largest pocket of the mask carrier.

Tabulated Data:

NSN	4240-00-066-0181
Unit of issue	Each
Basis of issue	CTA 50-970

Performance:

Installed on the masks for wearing at temperatures below 20 degrees Fahrenheit.


Shipping and Storage Data:

Type pack	10 per fiberboard box
Weight	.50 lb
cube	.4 cu ft
Type storage	Warehouse
Drawing number	LM 5-77-934

References:

TM 3-4240-280-10
TM 3-4240-280-23&P

WINTERIZATION KIT, CHEMICAL-BIOLOGICAL MASK: M4

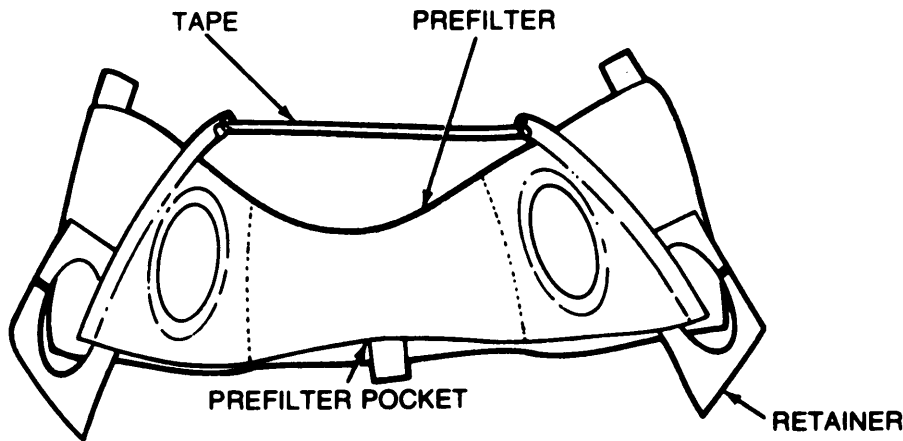

Type Classification:
Expendable; AMCTC 951272

Use:
To winterize the ABC-M17, M17A1, or M17A2 field chemical-biological mask for wear in extremely cold weather.

Description:
The M4 winterization kit consists of an ice particle prefilter made of cotton duck and knitted nylon fleece.

Functioning:
The ice particle prefilter fits under the chin on the mask. The openings and retainers fit around the inlet valves, and the cotton tape fits over the top of the voicemitter-outlet valve cover. The cheek flaps cover the inlet valves.

Tabulated Data:
NSN4240-00-065-0319
Unit of issue Each
Basis of issue CTA 50-970
Length (prefilter) 10 in.
Width (prefilter) 4 in.

Performance:
Installed on the masks for wearing at temperatures of below minus 20 degrees Fahrenheit (–28°C) to prevent frost from accumulating on the inlet valves of the mask.

Shipping and Storage Data:
Type pack100 per fiberboard box
Weight 25 lb
Cube 1.1 cu ft
Type storage Warehouse
Drawing number DL 5-77-944


References:
TM 3-4240-279-10
TM 3-4240-279-20&P

CHAPTER 3

COLLECTIVE PROTECTION

	Page
Collective Protection Equipment, CBR: Battery Control Central, Hawk, M10.....	3-3
Collective Protection Equipment, GUARDRAIL.....	3-4.1
Collective Protection Equipment, Guided Missile System, I-HAWK.....	3-4.3
Collective Protection Equipment, Guided Missile System, PATRIOT.....	3-4.5
Collective Protection Equipment, CBR; NIKE-HERCULES, CONUS M11, M12, M13.....	3-4.7
Collective Protection Equipment, REGENCY NET.....	3-4.9
Collective Protection Equipment, TACFIRE UCE.....	3-4.11
Collective Protection Equipment, TRAILBLAZER.....	3-4.13
Control Module.....	3-4.15
Converter, Frequency, Static: M5.....	3-4.17
Cooling Shroud and Fan.....	3-4.19
Collective Protection Equipment, NBC: M20 Simplified.....	3-6.1
Entrance, Protective, Pressurized, Collapsible: M10 and M12.....	3-5
Entrance, Protective, Pressurized: Collapsible, M13, M15, M16.....	3-6.3
Entrance, Protective, Pressurized: Collapsible, M14.....	3-6.5
Fitter Unit, Gas-Particulate: 200 CFM, 208 V, 400 Hz, M56.....	3-7
Filter Unit, Gas-Particulate, 200 CFM, 208 V, M84.....	3-8.1
Filter Unit, Gas-Particulate, 400 CFM, 208 V, 400 Hz, M59.....	3-8.3
Filter Unit, Gas-Particulate, 400 CFM, 208 V, 400 Hz, M87.....	3-8.5
Filter Unit, Gas-Particulate: Armored Ambulance, Six-Man 12 CFM, M14.....	3-9
Filter Unit, Gas-Particulate: Gas Engine Driven, 300 CFM, ABC-M6A1.....	3-11
Filter Unit, Gas-Particulate: Hospital, Six-Man, 12 CFM, ABC-M7A1.....	3-13
Filter Unit, Gas-Particulate: Tank, 20 CFM, M13 and M13A1.....	3-15
Filter Unit, Gas-Particulate: Tank, 12 CFM, M8A2 and M8A3.....	3-17
Purifier, Air: M2A1, M2A2 and Precleaned and Particulate Fitter Assembly: M1A1 -19.....	3-18.1
Safety Equipment Set, Respiratory: Two-Man, Gasoline Tank Cleaning.....	3-19
Shelter System, Collective Protection, Chemical - Biological: Inflatable, Trailer - Transported, M51.....	3-21

COLLECTIVE PROTECTION EQUIPMENT, CBR: BATTERY CONTROL CENTRAL, HAWK, M10

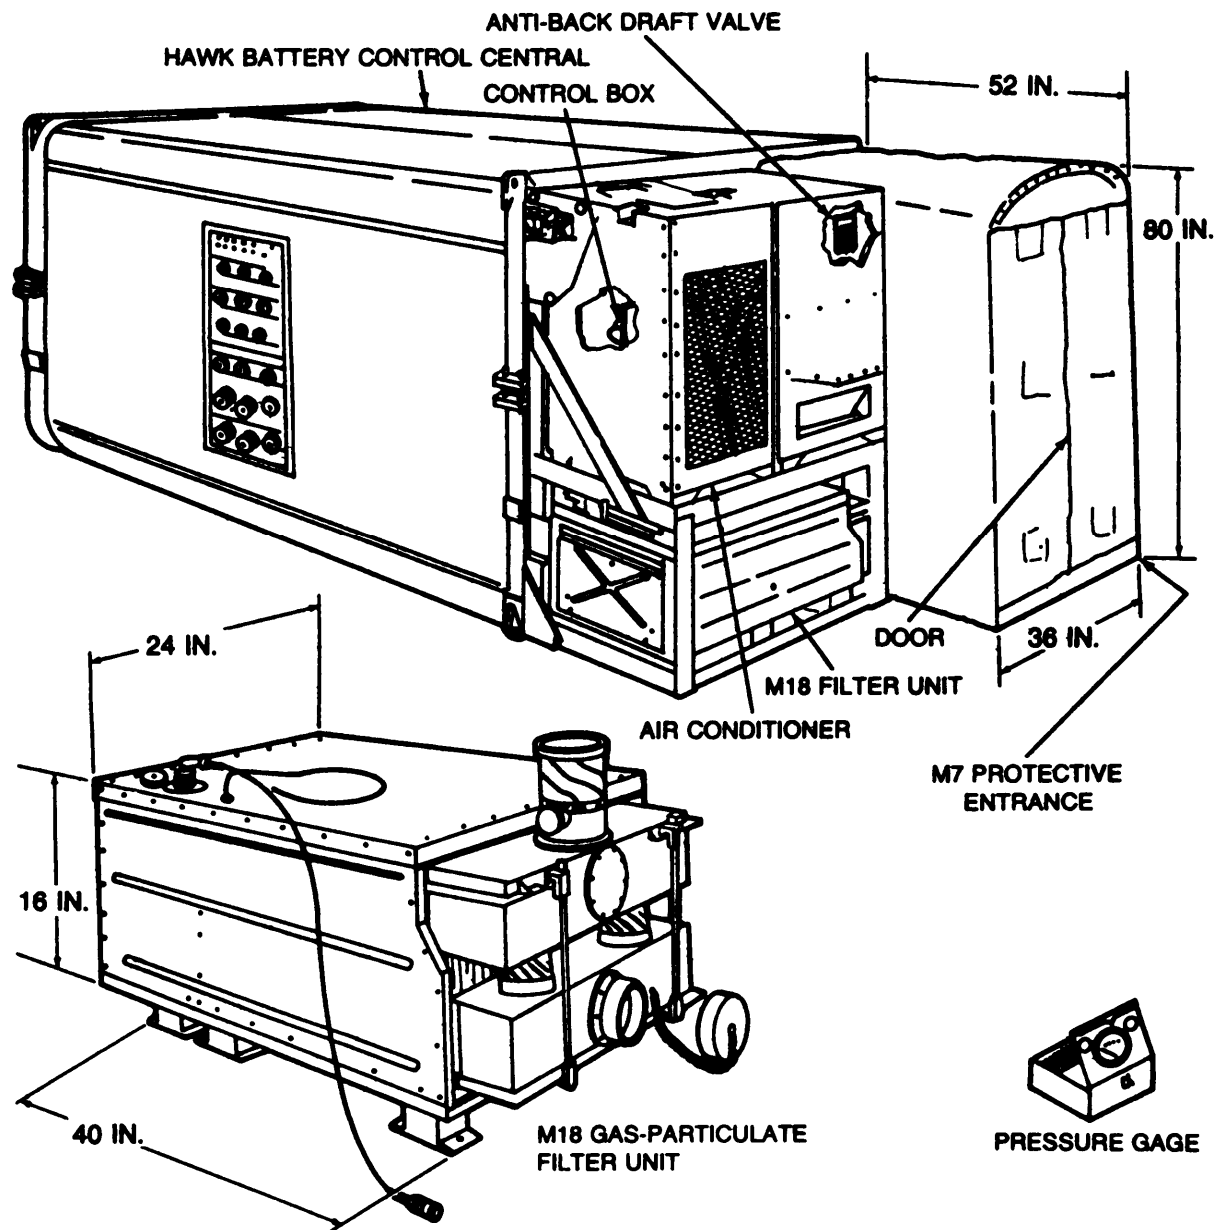

Type Classification:

STD (LCC-A); AMCTC 4663 66

Use:

To provide filtered, uncontaminated air for unmasked personnel working in the HAWK battery control central (BCC) during chemical or biological agent attacks. It also provides a means for personnel to enter and leave the BCC without admitting contaminated air into the interior.

Description:

The M10 collective protection equipment consisted of an M18 300 CFM (cubic feet per minute) EMD (electric-motor driven) gas-particulate filter unit, an M7 protective entrance, and an M43 protective entrance shipping and storage container. A dial indicating pressure gage is issued as special test equipment.

Functioning:

The M18 filter unit provides purified air to the air conditioner at the rate of 125 cfm and to the protective

TM 43-0001-26-1

entrance at the rate of 175 cfm. The direct output from the filter unit clears the protective entrance. The pressure gage is used to check the operating pressures in the BCC and CPE.

Tabulated Data:

NSN	4240-00-736-7743
Line item number	E52453
Unit of issue	Each
Basis of issue	TOE/MTOE
M18 fitter unit:	
Dimensions	40 x 24 x 16 in.
Weight	160 lb
Power source required (from HAWK BCC)	416 volt, 400Hz 3-phase ac
Capacity	300 cfm
Types of filters:	
M23 150 CFM gas filters	Two
M24 150 CFM particulate filters	Two
Air filter	One
Protective entrance:	
Dimensions - erected	80 x 36 x 52 in.
Dimensions -folded	80 x 36 x 9 in.
Weight	54 lb

Shipping and storage container:

Dimensions 90 x 38 x 16 in.
Weight 91 lb

Performance:

When the M10 CPE is properly adjusted, interior pressure in the BCC is maintained at 1.0 to 1.7 inches of water above atmospheric pressure. The air pressure difference between the BCC and the protective entrance is maintained at 0.3 to 0.5 inches of water.

Shipping and Storage Data:


M18 fitter unit:
Type pack 1 per wooden box
Weight 300 lb
Cube 24.6 cu ft

M7 protective entrance:
Type pack 1 per M46 aluminum container
 crated in a wooden box
Weight 437 lb
cube 43.3 cu ft
Type storage Warehouse
Drawing number DL 5-19-3075

References:

TM 3-4240-229-12
TM 3-4240-229-20P
TM 3-4240-229-34
TM 3-4240-229-34P

COLLECTIVE PROTECTION EQUIPMENT, GUARDRAIL

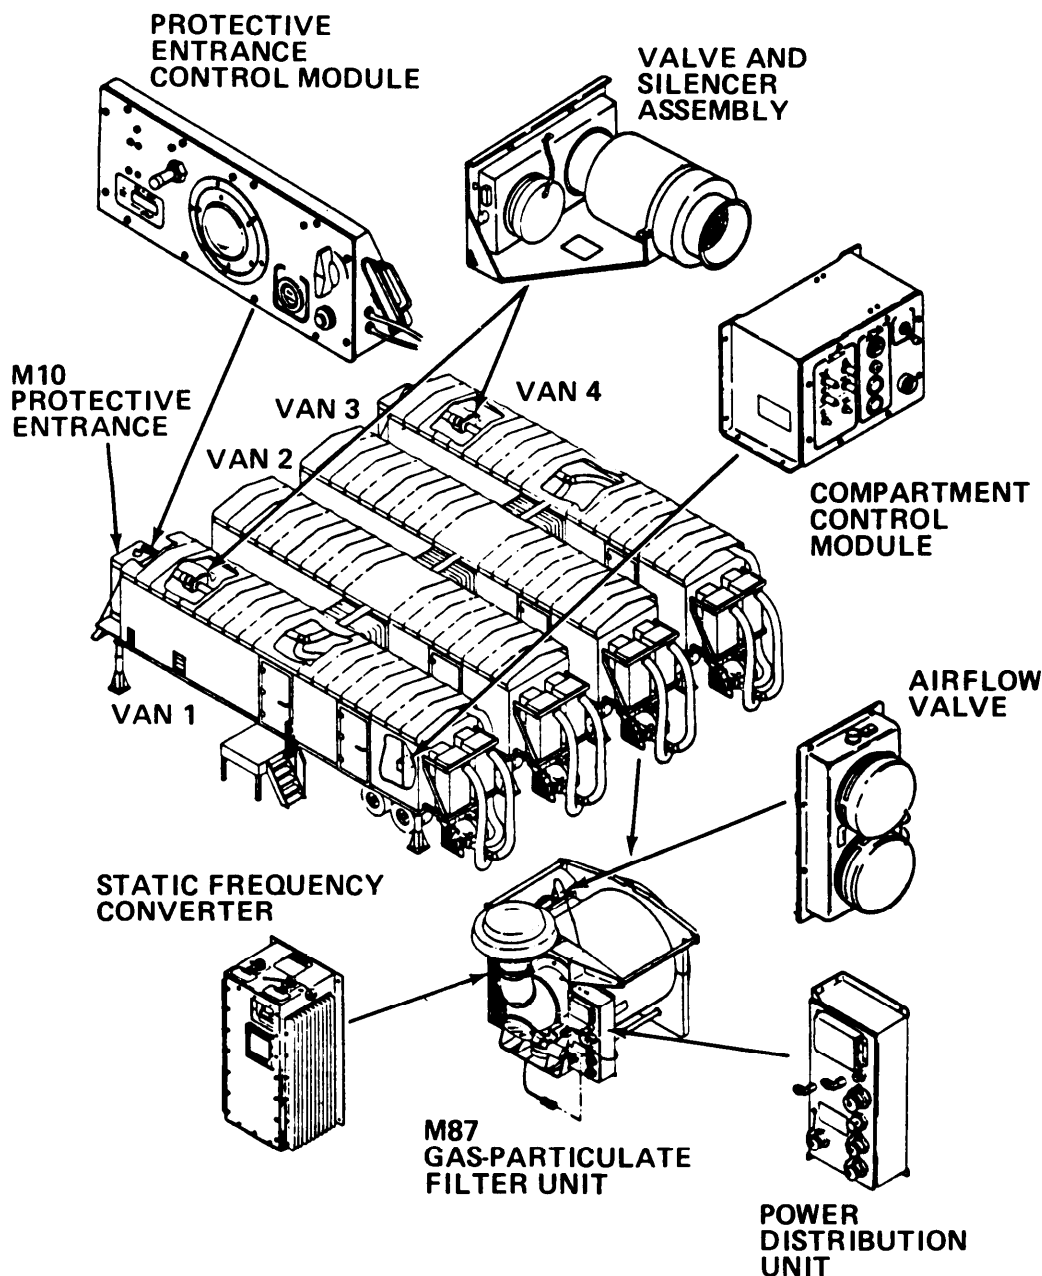

Type Classification:
STD (LCC-A)

Use:

Provides filtered air under positive pressure to field shelters allowing operation in a chemical-biological agent contaminated area. Personnel enter and leave through a protective entrance without admitting contaminated air.

Description:

The GUARDRAIL collective protection equipment consists of M10 protective entrances with

protective entrance control modules; M87 gas-particulate filter units and compartment control modules, and M5 static frequency converters.

Functioning:

Four M87 gas-particulate filter units remove toxic gases and dust from the air supplied to four vans and two M10 protective entrances. The airflow valves on the gas-particulate filter units on vans 2 and 3 remain in the open position. The fans on vans 2 and 3 draw outside air through the inlet caps and dust separators and force the air into the filter units. The fans force filtered air into the vans. The fans on

vans 1 and 4 draw outside air through the inlet caps and dust separators and force it into the filter units. The fans force cleaned air from the filter units into the airflow valves. The airflow valves direct the filtered air to the vans and the M10 protective entrances. Air duct hoses carry the filtered air through airflow valves and silencers at each protective entrance. Filtered air enters each van through air conditioners. The pressure sensing components in the compartment control modules in vans 1 and 4 automatically adjust the associated airflow valves to maintain positive pressure in all four vans.

The MIO protective entrances provide pressurized transition areas between the vans (1 and 4) and the outside contaminated zone. A balance hose between the two protective entrance air duct hoses ensures balanced pressurization between the two protective entrances. Personnel entering from the outside must wait five minutes within either of the protective entrances before entering van 1 or 4. Contamination is purged by the flow of the filtered air. The protective entrance control modules automatically adjust the airflow valve and silencer assemblies to maintain the proper air pressure inside the protective entrances and contain purge timers and low pressure warning indicators.

Tabulated Data:

NSN:

M10 Entrance4240-00-229-2610

M87 GPFU4240-01-192-7234

M5 SFC4240-00-394-9571

Line item numberN/A

Unit of issueEach

Basis of issueTOE/MTOE

Weight:

M10 Entrance145 lb

M87 GPFU256 lb

M5 SFC65 lb

Dimensions:

M10 Entrance (packaged)49.30 x 43.30 x
12.50 in.

M10 Entrance (erected)49.30 x 43.30 x
85.40 in.

M87 GPFU.....34 x 36 x 32 in.

M5 SFC.....8.50 x 10.50 x 20.00 in.

Performance:

Power requirements:

Entrance control module2 A at 28 Vdc

M87 GPFU1600W

Airflow valve1A max at 28 Vdc

Compartment control module1 A max at
28 Vdc

M5 SFC Input Voltage: 208 V, 60 Hz, 3-phase

Output Voltage: 208 V, 400 Hz 3-phase

Input voltage:

Entrance control module28 Vdc

M87 GPFU208V,400Hz,3phase

Power distribution unit208 v, 400 Hz,
3-phase, max capacity

3.5 kW

Airflow valve 28 Vdc

Compartment control module208 V,
400 Hz, 3-phase

M5 SFC. 208 V, 60 Hz phase,
max capacity 3.2 kW

Airflow:

M87 GPFU400 cfm max

Airflow valve 40 cfm min at
20.0 in. wg

Particulate filter.....200 cfm

Gas filter 200 cfm

Shipping and Storage Data:

Not available.

References:

TM 3-4240-309-20&P

TM 3-4240-299-23&P

TM 3-4240-317-20&P

TM 3-4240-284-20&P

TM 3-4240-284-30&P

TM 3-4240-302-30&P-1

TM 3-4240-302-30&P-2


TM 3-4240-302-30&P-3

TM 3-4240-302-30&P-4

TM 3-4240-302-30&P-5

TM 3-4240-302-30&P-6

COLLECTIVE PROTECTION EQUIPMENT, GUIDED MISSILE SYSTEM, I-HAWK

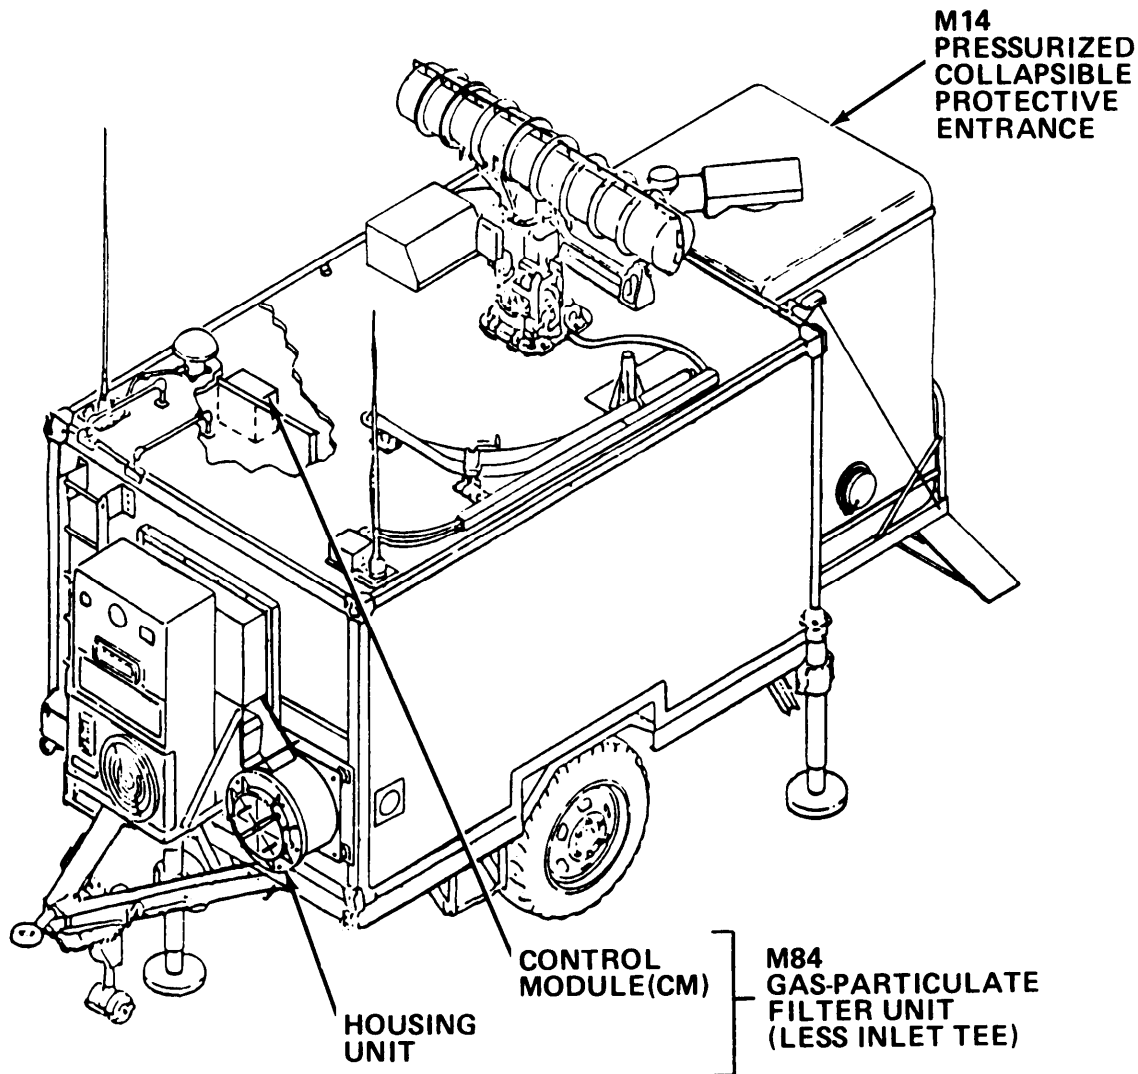

Type Classification:
STD (LCC-A)

Use:

Provides filtered air under positive pressure to field shelters allowing operation in a chemical-biological agent contaminated area. Personnel enter and leave through a protective entrance without admitting contaminated air.

Description:

The I-HAWK collective protection equipment consists of an M14 protective entrance with protective entrance control module and M84 gas-particulate filter unit and compartment control module.

Functioning:

The M84 gas-particulate filter unit (GPFU) removes toxic gases and dust from air supplied to the shelter and M14 protective entrance (PE). A fan in the filter housing unit draws outside air through an air plenum and forces it through the gas and particulate filters to the shelter. Filtered air passes from the shelter to the PE through an external air duct. Pressure sensing components in the compartment control module provide a low pressure warning.

The M14 protective entrance provides a pressurized transition area between the shelter and the outside environment. Personnel entering from the outside must wait five minutes in the PE before entering the shelter. The filtered airflow purges contamination from the PE during the 5-minute

waiting period. The protective entrance control module (PECM) contains a timer for measuring the purge period and a low pressure warning indicator.

Tabulated Data:

NSN:

M14 Entrance	4240-01-105-5521
M84 GPFU	4240-01-149-1719
Line item number	N/A
Unit of issue	Each
Basis of issue	TOE/MTOE
Weight:	
MI 4 Entrance	139 lb
M84 GPFU	256 lb
Dimensions:	
M14 Entrance (packaged)	49.30 x 43.30
	x 12.50 in.
M14 Entrance (erected)	49.30 x 43.30
	x 85.40 in.
M84 GPFU	31 x 38 x 32 in.

Performance:

Power requirements:

Entrance control module 2 A at 28 Vdc

M84 GPFU.....1100W
 Compartment control module 1 A
 max at 28 Vdc

Input voltage:

Entrance control module 28 Vdc
 M84 GPFU.....208 V, 400 Hz,
 3-phase
 Compartment control module 208 V, 400 Hz,
 3-phase, 3.5 kVA max

Airflow:

M84 GPFU.....200 cfm rated
 (actual may be higher)
 Particulate filter.....200 cfm
 Gas filter.....200 cfm


Shipping and Storage Data:

Instructions for administrative storage are provided in TM 3-4240-310-20-&P.

References:

TM 3-4240-311-20&P
 TM 9-4935-393-14-2
 TM 3-4240-302-30&P-2
 TM 3-4240-302-30&P4

COLLECTIVE PROTECTION EQUIPMENT, GUIDED MISSILE SYSTEM, PATRIOT

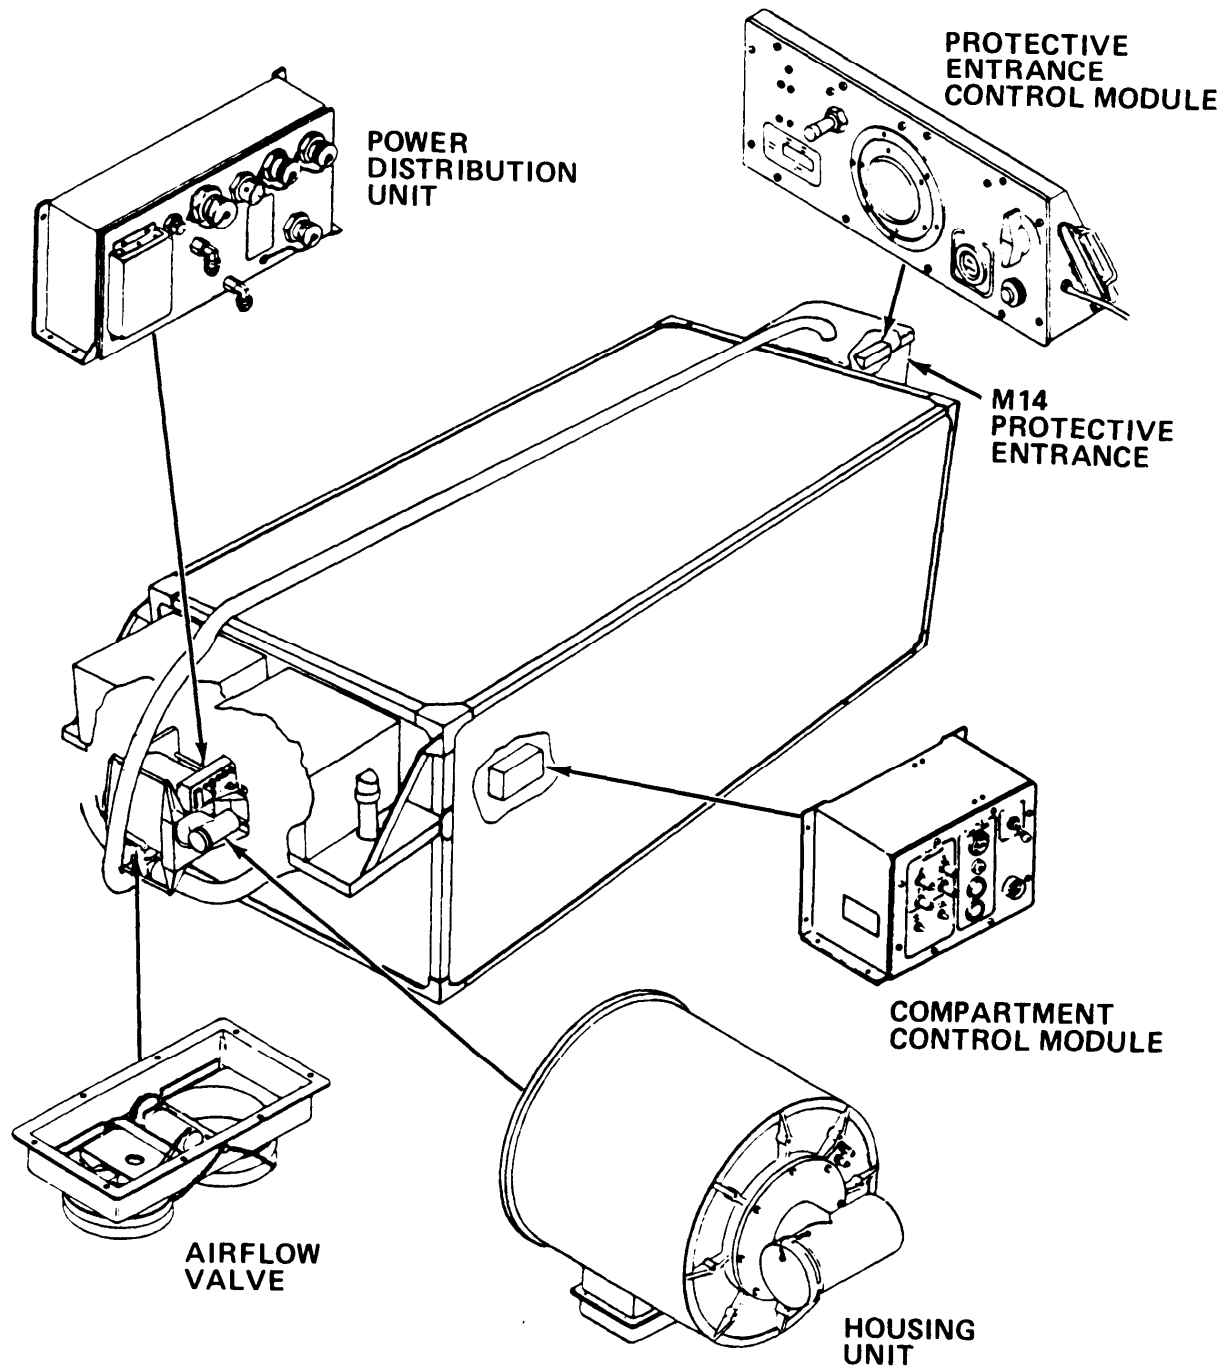*Type Classification:*

STD (LCC-A)

Use:

Provides filtered air under position pressure to field shelters allowing operation in a chemical-biological agent contaminated area. Personnel enter and leave through a protective entrance without admitting contaminated air.

Description:

The PATRIOT collective protection equipment consists of an M14 protective entrance with protective entrance control module, an M59 gas-particulate filter unit (GPFU), airflow valve, power distribution unit, compartment control module, and installation kit M265.

Functioning:

The M59 gas-particulate filter unit removes toxic gases and dust from the air supplied to the shelter and M1 4 protective entrance. The fan draws outside air through the air inlet and forces it into the filter unit. The fan forces filtered air from the filter unit to the airflow valve. The airflow valve directs filtered air to the shelter and M1 4 protective entrance. Air duct hoses deliver filtered air to the M1 4 protective entrance. Filtered air enters the shelter through the air conditioner. Pressure sensing components in the compartment control module automatically adjust the airflow valve to maintain a positive pressure in the shelter.

The M14 protective entrance provides a pressurized transition area between the shelter and the outside contaminated zone. Personnel entering from the outside must wait five minutes within the protective entrance before entering the shelter. The flow of the filtered air purges contamination from the M1 4 protective entrance. The protective entrance control module contains the purge timer and a low-pressure warning indicator.

Tabulated Data:

NSN:

M59 GPFU 4240-00-237-0223
 M14 Entrance 4240-01-105-5521
 Installation kit M265 4240-01-110-7617

Line item number N/A

Unit of issue 0 Each

Basis of issue TOE/MTOE

Weight:

M59 GPFU 123 lb
 M14 Entrance 139 lb
 Entrance control module 7.5 lb
 Compartment control module 9 lb
 Power distribution unit 16 lb

Dimensions:

M59 GPFU 34 x 36 x 32 in.
 M14 Entrance (packaged) 49.3 x 43.3 x 12.5 in.

M14 Entrance (erected) 49.3 x 43.3 x 85.4 in.
 Entrance control module 16.00 x 6.75 x 5.00 in.
 Compartment control module 7.70 x 11.75 x 6.50 in.
 Power distribution unit 18.50 x 8.25 x 4.25 in.

Performance:

Power requirements:

Entrance control module 2A at 28 Vdc
 M59 GPFU 1700W
 Airflow valve 1A max at 28 Vdc
 Compartment control module 1 A max at 28 Vdc

Input voltage:

Entrance control module 28 Vdc
 M59 GPFU 208 V, 400 Hz, 3-phase
 Power distribution unit 208 V, 400 Hz, 3-phase, max capacity 3.5 kW

Airflow valve 28 Vdc

Compartment control module 28 Vdc

Airflow:

M59 GPFU 400 cfm max
 Airflow valve 40 cfm min at 20.0 in.
 Particulate filter 400 cfm
 Gas filter 400 cfm


Shipping and Storage Data:

Not available.

References:

TM 3-4240-285-20&P
 TM 3-4240-285-30&P
 TM 3-4240-302-30&P-1
 TM 3-4240-302-30&P-3
 TM 3-4240-302-30&P-5
 TM 3-4240-302-30&P-6

COLLECTIVE PROTECTION EQUIPMENT, CBR: NIKE-HERCULES, CONUS, M11, M12, AND M13

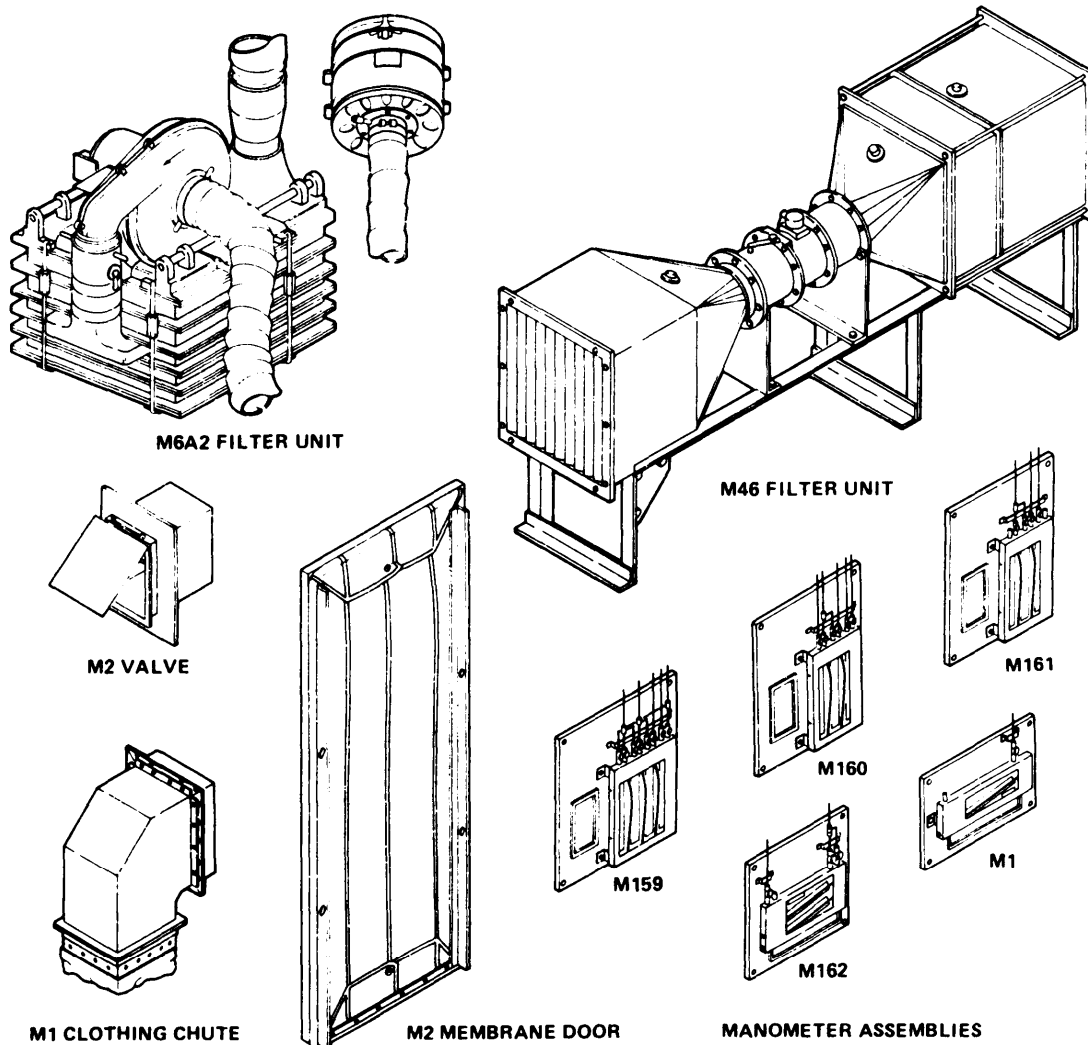

Type Classification:

STD (LCC-A): AMCTC 4663

Use:

Provides chemical, biological, and radiological (CBR) protection for the Nike-Hercules CONUS sites. Each site has three personnel area shelters that require protection: 60-man (M11 and M13) or 90-120-man (M12) IFC Control Area 60-man Launch Area, and 15-man Magazine Control Room shelters.

Description:

The Nike-Hercules collective protection equipment consists of M46 filter units (IFC and Launch Areas), M6A2 filter units (Magazine), M1 clothing chutes, M2 antibackdraft valves, M2 membrane doors, and manometer assemblies M159, M160, M161, M162, and M1.

Functioning:

Gas-particulate filter units generate a positive pressure within the shelter, minimizing CBR agent penetration from the outside. Adjustable anti-backdraft valves restrict exhaust airflow to maintain the required positive pressure. M162 and M1 manometer assemblies are used to monitor the static pressure in the shelter entry and personnel areas. Pressure drop across the filters in the filter units are monitored via the M159, M160, and M161 manometers. A clothing chute is provided for disposal of contaminated clothing in the entry and shower area of the IFC and Launch shelters. Permeable membrane doors allow entry from the shower area to the personnel area while minimizing CBR agent penetration.

NSN:

Line item number

Unit of issue Each

Basis of issue..... TOE/MTOE

Weight:

Dimensions:

M46 filter unit	108.00 x 29.50 x 51.25 in.
M6A2 filter unit	36 x 31 x 37 in.
M1 clothing chute	17.75 x 25.00 x 39.00 in.
M2 antibackdraft valve	18.0 x 10.5 x 17.0 in.
M2 membrane door	35.5 x 83.5 in.
M159 manometer assy.	3.5 x 22.0 x 22.0 in.
M160 manometer assy.	3.5 x 22.0 x 22.0 in.
M161 manometer assy.	3.5 x 22.0 x 22.0 in.
M162 manometer assy	3.5 x 22.0 x 22.0 in.
M1 manometer assy	3.5 x 22.5 x 12.0 in.

Performance:

M46 filter unit220V, 60 Hz, 3-phase,
1 hp motor, 600 cfm airflow

M6A2 filter unit 220 V, 60 Hz, 3-phase,
1 hp motor, 300 cfm airflow

M2 antibackdraft valve	50-400 cfm airflow, 0.08 -1.0 in. wg static pressure range
M2 membrane door	400 cfm airflow, 0.1 in. wg air resistance
M159 manometer assy	Four single-tube vertical manometers, 0.00- to 8.00- in. of water sliding scale
M160 manometer assy	Three single-tube vertical manometers, 0.00- to 8.00-in. of water sliding scale
M161 manometer ashy	Three single-tube vertical manometers, 0.00- to 8.00 in. of water sliding scale
M162 manometer assy	Two single-tube inclined manometers, 0.00- to 1.00- in. of water sliding scale
M1 manometer assy	One single-tube inclined manometers, 0.00- to 1.00- in. of water sliding scale

Differences:

The Nike-Hercules sites consist of one IFC Area, one Launch Arm and two (M13) or three (M11 and M12) Magazine Control Room shelters. The table below identifies type and quantity of collective protection equipment used in each Nike-Hercules site and shelter.

Shipping and Storage Data:

Not available.


References:

TM 3-4240-265-12
TM 3-4240-265-20&P

Nike-Hercules Shelter Collective Protection Equipment

Shelter	Collective Protection Equipment (Type and Quantity)									
	M46 Filter Unit	M6A2 Filter Unit	M1 Clothing Chute	M2 Anti- Back Draft Valve	M2 Mem- brane Door	Manometer Assemblies				
						M159	M160	M161	M162	M1
60-Man IFC (M11, M13)	1		1	1	1	1			1	
90-120-Man IFC (M12)	2		1	2	1	1	1		1	
Launch	1		1	1	1	1			1	
Magazine Control Room		1		1				1		1

COLLECTIVE PROTECTION EQUIPMENT, REGENCY NET

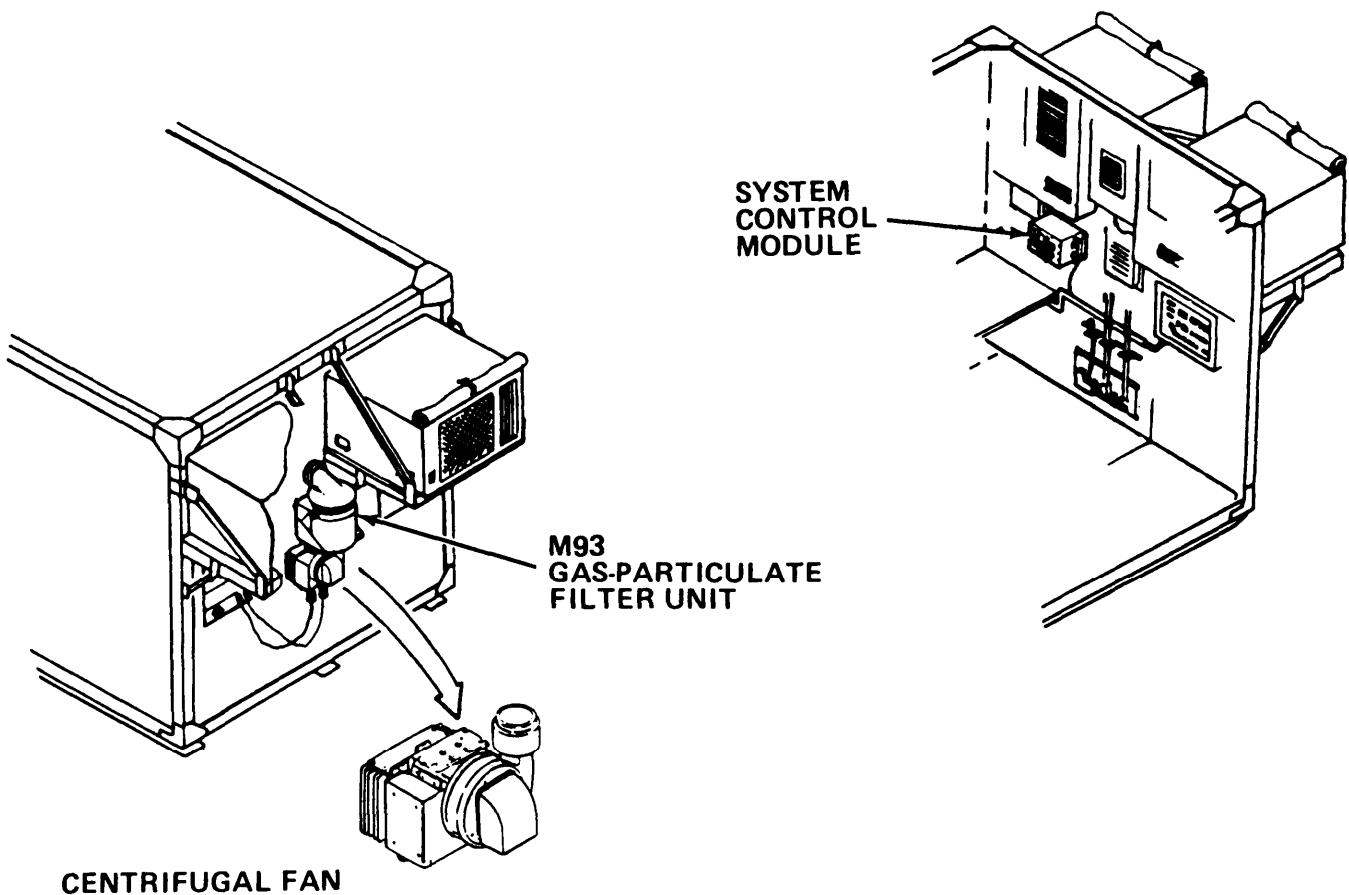

Type Classification:
STD (LCC-A)

Use:

Provides filtered air under positive pressure to field shelters allowing operation in a chemical-biological agent contaminated area

Description:

The REGENCY NET collective protection equipment consists of an M93 gas-particulate filter unit (GPFU), compartment control module, and centrifugal fan.

Functioning:

The M93 gas-particulate filter system (GPFU) removes dust and toxic gases from the air it supplies to the shelter. Major components of the

system include a 100 cfm fan, an M48 gas-particulate filter, and a system control module (SCM).

The fan and gas-particulate filter are mounted outside the shelter. The fan draws ambient air and pushes it through the filter. Filtered air passes from the filter outlet, through the transition, and into the shelter. The fan is an integral unit consisting of a radial wheel fan, motor, electronic commutation circuitry, and a 28 volt power supply. Motor speed range is infinitely variable providing required airflow between 20 cfm and 100 cfm.

The SCM is interconnected with the fan, but mounted inside the shelter. It is powered by a 28 volt power supply housed in the fan. The SCM monitors the pressure differential between inside and outside the shelter, converts it to a dc voltage, and electronically conditions the signal so that it is

of proper amplitude and polar to increase or decrease fan speed to maintain shelter pressure at 0.75 inches water gage.

Tabulated Data:

NSN:

M93 GPFU	4240-01-231-6515
Control module	4240-01-234-2266
centrifugal fan	4140-01-234-8170
Line item number	N/A
Unit of issue	Each
Basis of issue	TOE/MTOE
Weight	
M93 GPFU	57.0 lb
Control module	3.5 lb
Centrifugal fan	14.0 lb

Dimensions

M93 GPFU	14.50 x 13.50 x 29.00 in.
Control module	11.52 x 6.94 x 7.69 in
Centrifugal fan	8.27 x 10.31 x 10.00 in.

Performance:

Power requirements:

M93 GPFU	480W
Control module	250 mA 28 Vdc
Centrifugal fan	480 W
Input Voltage:	
M93 GPFU	120 V, 50/60 or 400 Hz, 1-phase
Control module	28 Vdc
centrifugal fan	120V, 50/60 or 400 Hz, 1 -phase

Airflow:

M93 GPFU	20-100 cfm rated (actual may be higher)
Gas-particulate filter	100 cfm
Centrifugal fan	20-100 cfm


Shipping and Storage Data:

Instruction for administrative storage are provided in TM 3-4240-315-20&P.

References

TM 3-4240-315-20&P
TM 11-5895-1218/SPAWAR

COLLECTIVE PROTECTION EQUIPMENT, TACFIRE UCE

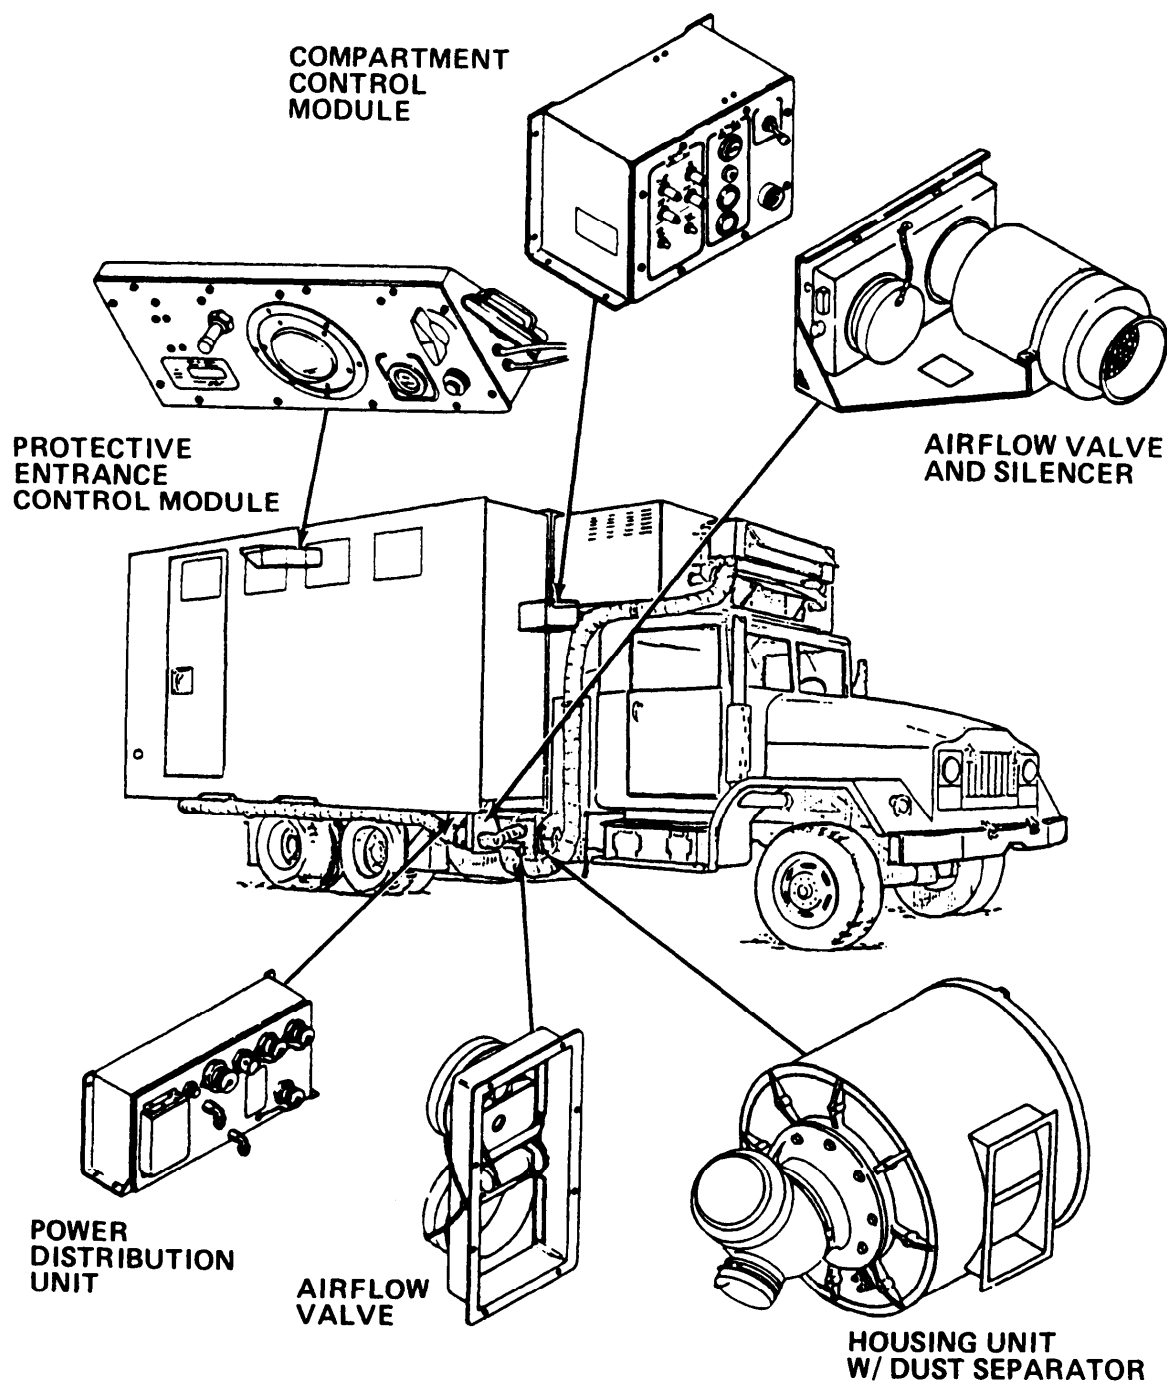*Type Classification*

STD (LCC-A): MSR 05768018

Use:

Provides filtered air under positive pressure to field shelters allowing operation in a chemical biological agent contaminated area Personnel

enter and leave through a protective entrance without admitting contaminated air.

Description:

The TACFIRE collective protection equipment consists of an M59 gas-pmicate filter unit (GPFU), airflow valves, power distribution unit, protective

entrance control module, compartment control module, and installation kit M277.

Functioning:

The M59 gas-particulate filter unit removes toxic gases and dust from the air supplied to the shelter and internal protective entrance. The fan draws outside air through the air inlet/dust separator and forces it into the filter unit housing. The fan forces air through the gas and particulate filters to the airflow valve. The airflow valve directs filtered air to the shelter and internal protective entrance. Air duct hoses deliver filtered air to the internal protective entrance. Filtered air enters the shelter through the Environmental Control Unit. Pressure sensing components in the compartment control module automatically adjust the airflow valve to maintain a positive pressure in the shelter.

The internal protective entrance provides a pressurized transition area between the shelter and the outside contaminated zone. Personnel entering from the outside must wait five minutes within the protective entrance before entering the shelter. The flow of the filtered air purges airborne particles from the protective entrance control module. The internal protective entrance control module automatically adjusts the airflow valve and silencer assembly to maintain the proper air pressure inside the protective entrance and contains the purge timer and low pressure warning indicator.

Tabulated Data:

NSN:

M59 GPFU4240-00-237-0223
installation kit M2774240-01-186-8423

Line item number.....N/A

Unit of issueEach

Basis of issueTOE/MTOE

Weight:

M59 GPFU 123 lb

Entrance control module.....7.5 lb

Airflow valve13 lb

Compartment control module9 lb

Power distribution unit.....16lb

Dimensions:

M59 GPFU34 x 36 x 32in.

Entrance control module16.00 x 6.75 x
5.00 in.

Airflow valve 15 x8 x 4in.

Compartment control module7.70 x 11.75
x 6.50 in.

Power distribution unit18.50 x 8.25
x 4.25 in.

Performance:

Power requirements:

Entrance control module2 A at 28 Vdc

M59 GPFU..... 1700W

Airflow valve 1A max at 28 Vdc

Compartment control module1 A max at
28 Vdc

Input voltage:

Entrance control module 28 Vdc

M59 GPFU.....208 V, 400 Hz,
3-phase

Power distribution unit208 V, 400 Hz,
3-phase, max capacity 3.5 kW

Airflow valve28 Vdc

Compartment control module28 Vdc

Airflow:

M59 GPFU400 cfm max

Airflow valve40 cfm min at 20.0 in. wg

Particulate filter400 cfm (200 cfm each)

Gas filter 400 cfm (200 cfm each)

Shipping and Storage Data:

Instructions for administrative storage are provided in TM 3-4240-308-20&P.

References:

TM 3-4240-308-20&P

TM 9-2320-260-10-1

TM 11-7440-241-10

TM 9-4935-393-14-1.-2


TM 3-4240-302-30&P-1

TM 3-4240-302-30&P-3

TM 3-4240-302-30&P-5

TM 3-4240-302-30&P-6

COLLECTIVE PROTECTION EQUIPMENT, TRAILBLAZER

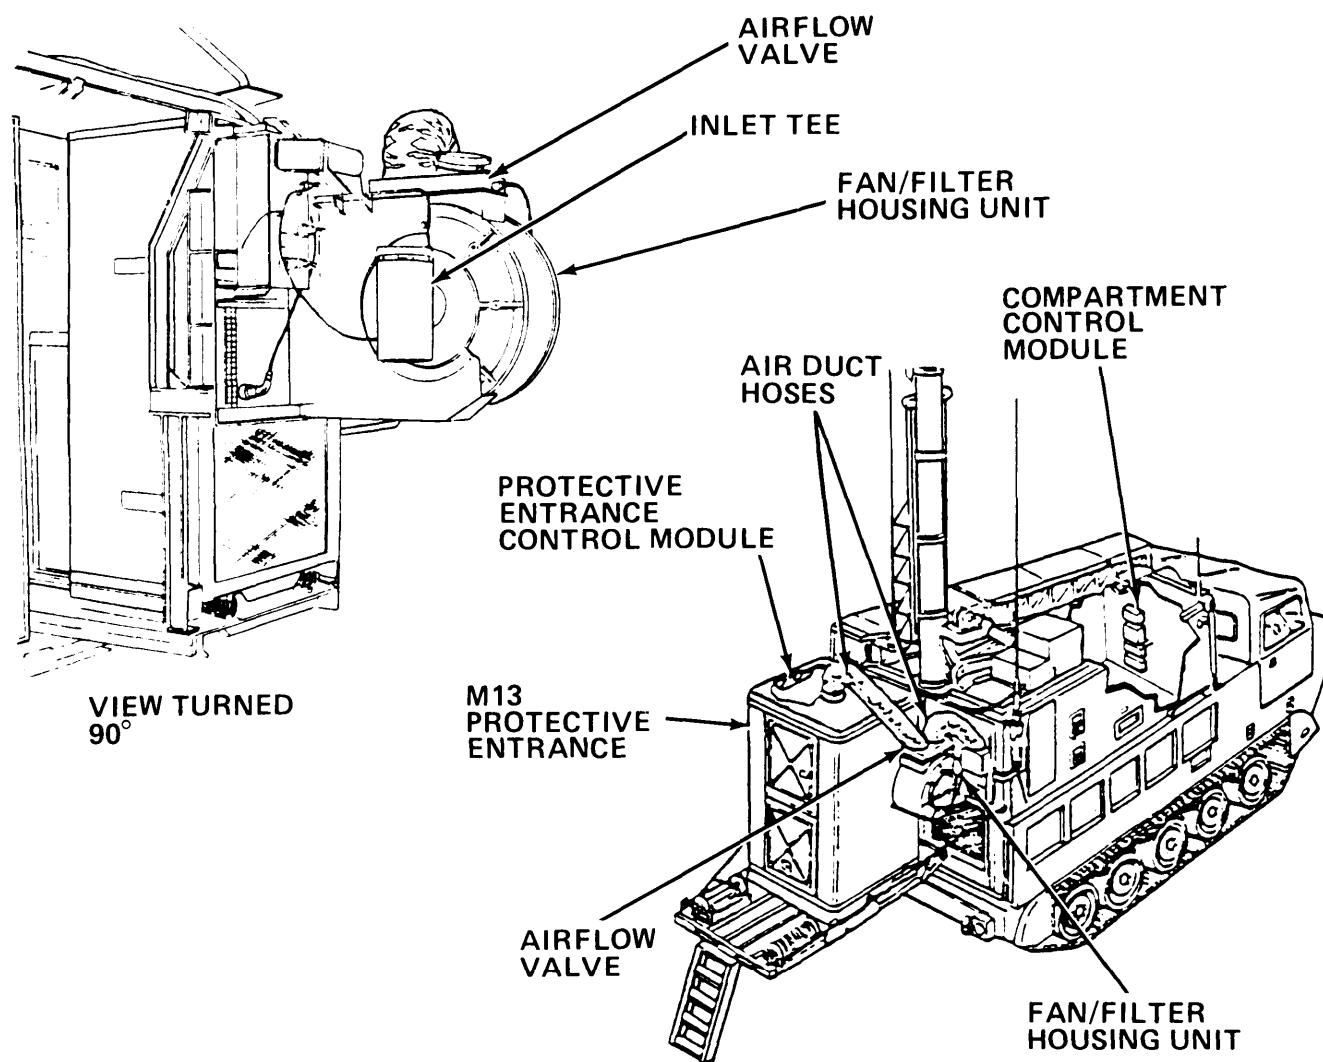

Type Classification:
STD(LCC-A)

Use:

Provides filtered air under positive pressure to field shelters allowing operation in a chemical-biological agent contaminated area. Personnel enter and leave through a protective entrance without admitting contaminated air.

Description:

The TRAILBLAZER collective protection equipment consists of an M 13 protective entrance with protective entrance control module, and an M56 gas-particulate filter unit and compartment control module.

Functioning:

The M56 gas-particulate filter unit removes toxic gases and dust from the air supplied to the shelter and the M13 protective entrance. A fan in the filter housing unit draws outside air through an inlet tee and forces it through gas and particulate filters to the airflow valve. The airflow valve directs filtered air to the shelter and M13 protective entrance through air duct hoses. Filtered air enters the shelter through the air conditioner. Pressure sensing components in the compartment control module automatically adjust the airflow valve to maintain a positive pressure in the shelter.

The M13 protective entrance provides a pressurized transition area between the shelter and the outside contaminated zone. Personnel

entering from the outside must wait ten minutes within the protective entrance before entering the shelter. The flow of the filtered air purges contamination from the M13 protective entrance. The protective entrance control module contains the purge timer and a low pressure warning indicator.

Tabulated Data:

NSN:

M13 Entrance4240-0 1-155-9971

M58 GPFU 4240-00-2374)227

Line item number I . . N/A

Unit of issue Each

Basis of issue.....TOE/MTOE

Weight:

M13 Entrance 145 lb

M58 GPFU 123lb

Dimensions:

M13 Entrance (packaged) 49.3 x 43.3 x
12.5 in.

M13 Entrance (erected) 49.3x 43.3 x
85.4 in.

M56 GPFU 31 x 36 x 32 in.

Performance:

Power requirements:

Entrance control module 2 A at 28 Vdc

M58 GPFU 930W

Airflow valve 1A max at 28 Vdc

Compartment control module 1 A max
at 28 Vdc

Input voltage:

Entrance control module 28 Vdc

M58 GPFU 208 V, 400 Hz,
3-phase

Power distribution unit 208V
400 Hz, 3-phase, max capacity 3.5 kW

Airflow valve 28 Vdc

Compartment control module 28 Vdc

Airflow:

M58 GPFU..... 200 cfm max

Airflow valve 40 cfm min at 20.0
in. wg

Particulate fitter 200 cfm

Gas filter 200 cfm

Shipping and Storage Data:

Instructions for administrative storage are provided in TM 3-4240-311-20&P.

References:

TM 3-240-311-20&P

TM 32-4240-001-14&P


TM 3-4240-302-30&P-1

TM 3-4240-302-30&-P4

TM 3-4240-302-30&P-5

TM 3-4240-302-30&P-6

CONTROL MODULE

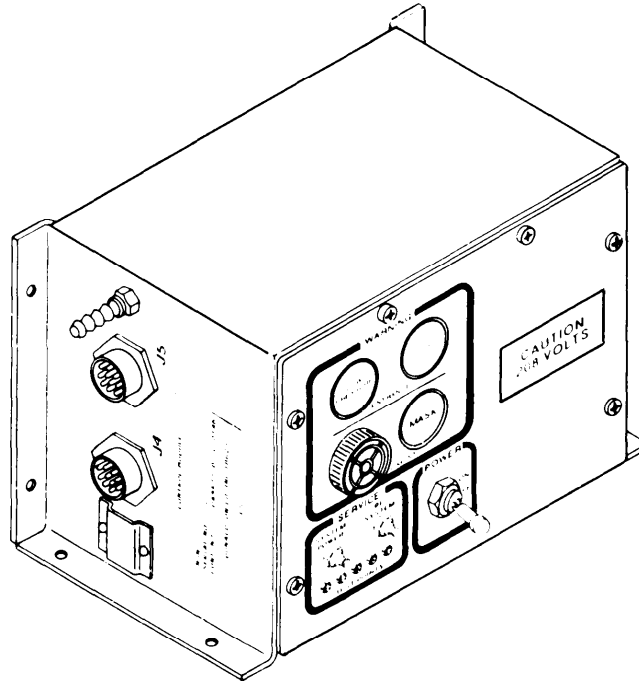

Type Classification:

Not separately type classified.
Component of various other systems.

Use:

The control module controls pressurization of the shelter on which collective protection equipment is installed and warns crew of low shelter pressure.

Description:

The control module, mounted inside the shelter, provides a visual (flashing MASK light) and audible (horn) warning whenever shelter pressure falls between 0.9 and 1.1 in. wg., or if input power fails. A MASK light press-to-test feature allows testing of the warning system circuits. Press-to-test LOW PRESSURE and OCCUPIED warning indicator lamps provide protective entrance status information.

Functioning:

The control module is powered by input power of 208 V, 400 Hz. Operating power is provided by an integral 28 Vdc power supply or, during input power failure, a 28 Vdc battery system. A pressure sensing switch activates the MASK warning light and horn when pressure is between 0.9 and 1.1 in. wg. Entrance warning lights are controlled by the

protective entrance control module. SYSTEM POWER and PE SYSTEM circuit breakers provide circuit protection at the 28 Vdc level. Test points are provided to aid testing and troubleshooting.

Tabulated Data:

NSN	4240-01-158-5904
Line item number	N/A
Unit of issue	Each
Basis of issue	TOE/MTOE
Weight l.	9.0 lb
Dimensions	7.70 x 11.75 x 6.50 in.

Performance:

Power requirements:	1 A max at 28 Vdc
Input voltage	208 V, 400 Hz, 3-phase



Battery system will not function during loss of power unless battery voltage is greater than 22 Vdc.

Shipping and Storage Data:

Weight	16.3 lb
Dimensions	13.9 x 9.4 x 10.0 in.
Cube	0.751 cu ft
Drawing	P5-19-6906

References:

TM 3-4240-302-30&P-2

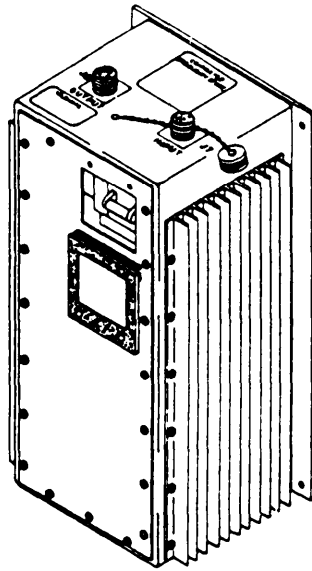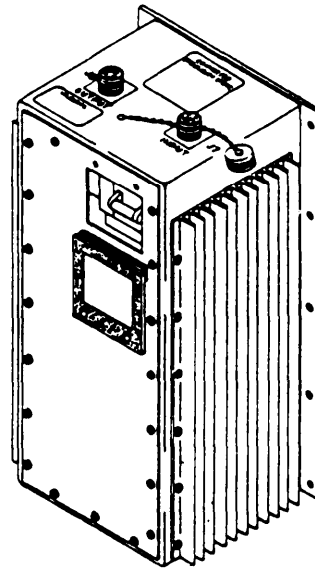CONVERTER, FREQUENCY, STATIC: M5**DAAK11-81-C-0020****DAAK11-82-C-0014***Type Classification:*

Not separately type classified.
Component of various other systems.

Use:

The static frequency converter (SFC) converts 208 Vat, 3-phase, 4 wire, 60 Hz input to 208 Vat, 3-phase, 5 wire, 400 Hz electrical power.

Description:

The SFC is a small single unit system which is easy to install. The SFC provides up to 3.2 kVA of power. A circuit breaker turns the SFC on or off and provides overbad protection. Test points are provided to check output voltage and frequency. Electrical receptacles are used to connect the SFC to input and output power cables.

Functioning:

Frequency conversion is accomplished by converting input power to dc, then chopping the dc voltage into 400 Hz, 3-phase power using silicon controlled rectifiers. A 5-second start delay circuit per-mits input fitter capacitors to initially charge at a controlled rate.

Limitations:

Input power limits are 208 ± 10 V rms, 3-phase, 3 wire line-to-line, 47 to 63 Hz. Input current is limited by a 30 A circuit breaker. Output voltage under load conditions of 1,600 VA to 3,200 VA is 208 ± 15 V rms line-to-line; 120 V rms line-to-neutral, maximum. Output frequency is 390 to 410 Hz. Overload capacity is 150% of rated load at any power factors; 0.80 to unity for ten seconds.

Tabulated Data:

NSN	4240-00-394-9571
Line item number	N/A
Unit of issue	Each
Basis of issue	TOE/MTOE
Weight	65 lb
Dimensions	8.5 x 10.5 x 20.0 in.

Performance:

Input Voltage	208 V, 60 Hz, 3-phase
Output Vottage	208 V, 400 Hz, 3-phase
Maximum Load	3.2 kVA

Short circuit and overload protection circuits latch the converter in an off condition; reset by cycling the circuit breaker off and on.

Equipment cooling is provided by external heat sinks; area around SFC must be clear of obstruction to allow adequate airflow. The SFC may be installed in cooling shroud and fan (NSN 4240-01-227-5532) which provides forced ambient air cooling.

Difference Between Models:

SFC for contract DAAK11-81-C-0020 have four mounting holes on the base, DAAK11-8240014 SFC have ten. The design of SFC for contract


DAAK11-82-C-0014 incorporates the addition of six biasing diodes in each of the power switching circuits.

Shipping and Storage Data:

Weight.....	75.0 lb
Dimensions.....	21.2 x 15.2 x 13.6 in.
Cube	2.430 cu ft
Specification	MIL-STD-2073
Drawing	P5-19-6425

References:
TM 3-4240-299-23&P

COOLING SHROUD AND FAN

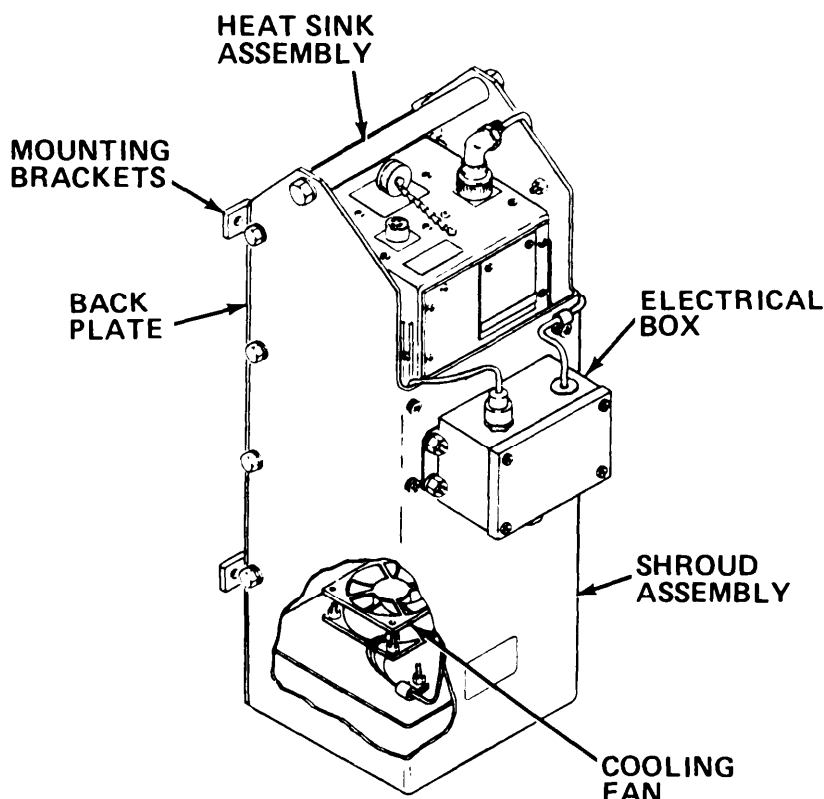

Type Classification:

Not separately type classified.
Component of various other systems.

Use:

The cooling fan and shroud provides forced air cooling of the M5 static frequency converter (NSN 4240-00-394-9571).

Description:

The cooling shroud and fan is a self-contained assembly which may be factory installed during host weapon system manufacture or field retrofitted. An electrical box provides the power distribution functions, supplying 208 V, 60 Hz, 3-phase power to the static frequency converter and cooling fan.

Functioning:

The shroud provides 100 cubic feet per minute of ambient air over the heat sink cooling fins of the static frequency converter. Two additional heat sink assemblies are mounted to the back of the static frequency converter to provide additional cooling capacity. The shroud electrical box provides

connectors for power distribution of 208 V, 60 Hz, 3-phase power to the static frequency converter and cooling fan via cables provided with the cooling shroud.

Tabulated Data:

NSN.....	4240-01-227-5532
Line item number.....	N/A
Unit of issue.....	Each
Basis of issue.....	TOE/MTOE
Weight.....	21 lb
Dimensions	13.50 x 13.75 x 27.25 in.

Performance:

Power requirements	23W
Input voltage	208 V, 60 Hz, 3-phase
Airflow	100 cfm




Shipping and Storage Data:

Specification	MIL-STD-2073
Drawing	P5-19-9628


References:

TM 3-4240-318-20&P
TM 3-4240-299-23&P

ENTRANCE, PROTECTIVE, PRESSURIZED, COLLAPSIBLE: M10 AND M12

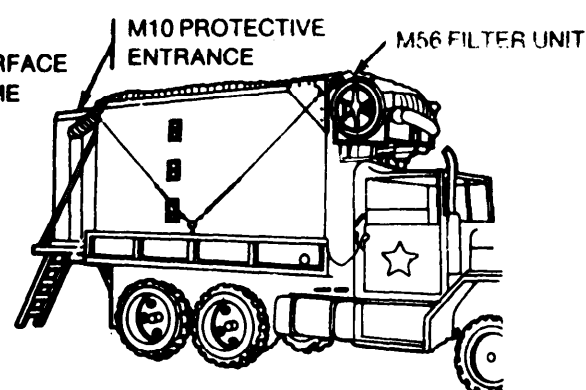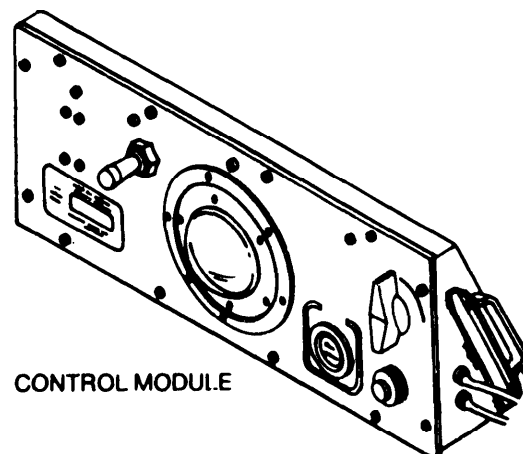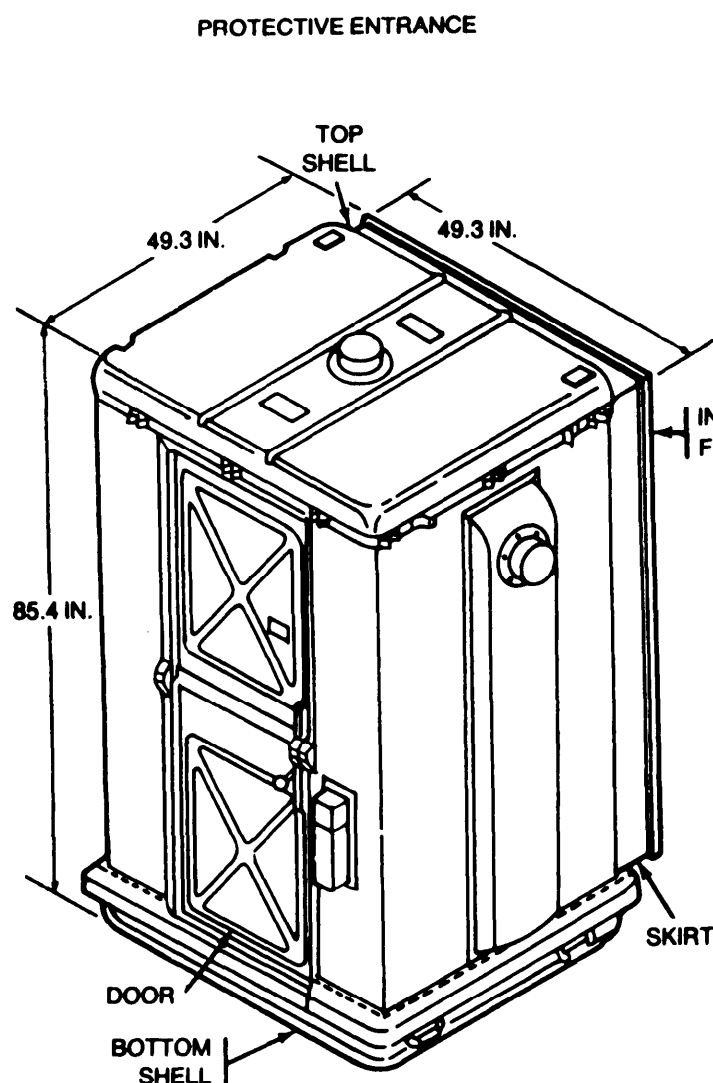

M10 PROTECTIVE ENTRANCE MOUNTED ON AN/GSG-10(V) ARTILLERY FIRE DIRECTION CENTER SHELTER

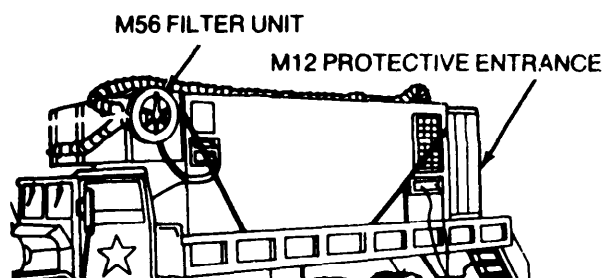

M12 PROTECTIVE ENTRANCE MOUNTED ON AN/SQ-73 AIR DEFENSE COMMAND AND CONTROL SYSTEM SHELTER

Type Classification:**M10 protective**

entrance STD (LCC-A); MSR 05766018

M12 protective

entrance STD (LCC-A); MSR 07786017

Use:

To provide a pressurized change area for personnel entering or leaving a vehicle-mounted shelter during chemical or biological attacks. The M10 protective entrance is used with the AN/GSG-10(V) TACFIRE S490 and S-492 shelters. The M12 protective entrance is used with the AN/SQ-73 shelter.

Description:

The protective entrance consists of top and bottom shells (which form a stowage box when the entrance is collapsed), a supporting frame with a door and butyl rubber-ted nylon-fabric walls, a protective entrance control module, a skirt, and an interface frame.

Difference Between Models:

See tabulated data.

Functioning:

The protective entrance serves as a vestibule for personnel to enter and leave the shelter without introducing airborne contamination into the pressurized personnel compartment. A gas-particulate filter unit filters and pressurizes the air supplied to the entrance. An installation kit provides airduct hoses, cables, and connectors for installation and interface of the filter unit and protective entrance on the shelter.

Tabulated Data:

M10 protective entrance:

NSN 4240-00-229-2610

Line item numberH10908

M12 protective entrance:

NSN4240-01-048-2923

Line item numberE11043

Unit of issueEach

Basis of issueTOE/MTOE

Weight 145 lb

Dimensions collapsed49.30 x
43.30 x 12,50 in.

Dimensions erected:

M1049.30 x 43.30 x 85.40 in.

M1249.30 x 49.30 x 85.40 in.

Skirt lengths:

M1013 in.

M12 8 in.

Performance:

Power requirements 2 amp at 28 Vdc

Input voltage28 Vdc

Shipping and Storage Data:

Type packOne per wooden crate

Weight232 lb

cube22 cu ft

Type storage.....W a r e h o u s e

Drawing numbers:

M10 protective entrance5-1 9-6201-40

M12 protective entrance5-19-6201 -20

References:

TM 3-4240-284-20&P

TM 3-4240-284-30&P

TM 3-4240-286-20&P

TM 3-4240-286-30&P


TM 9-1430-651-12 (AN/TSQ-73)

TM 9-1430-652-10-3 (AN/TSQ-73)

TM 11-7440-240-10-1 (AN/GSG-10(V))

TM 11-7440-241-10-1 (AN/GSG-10(v))

M20 SIMPLIFIED NBC COLLECTIVE PROTECTION EQUIPMENT (SCPE)

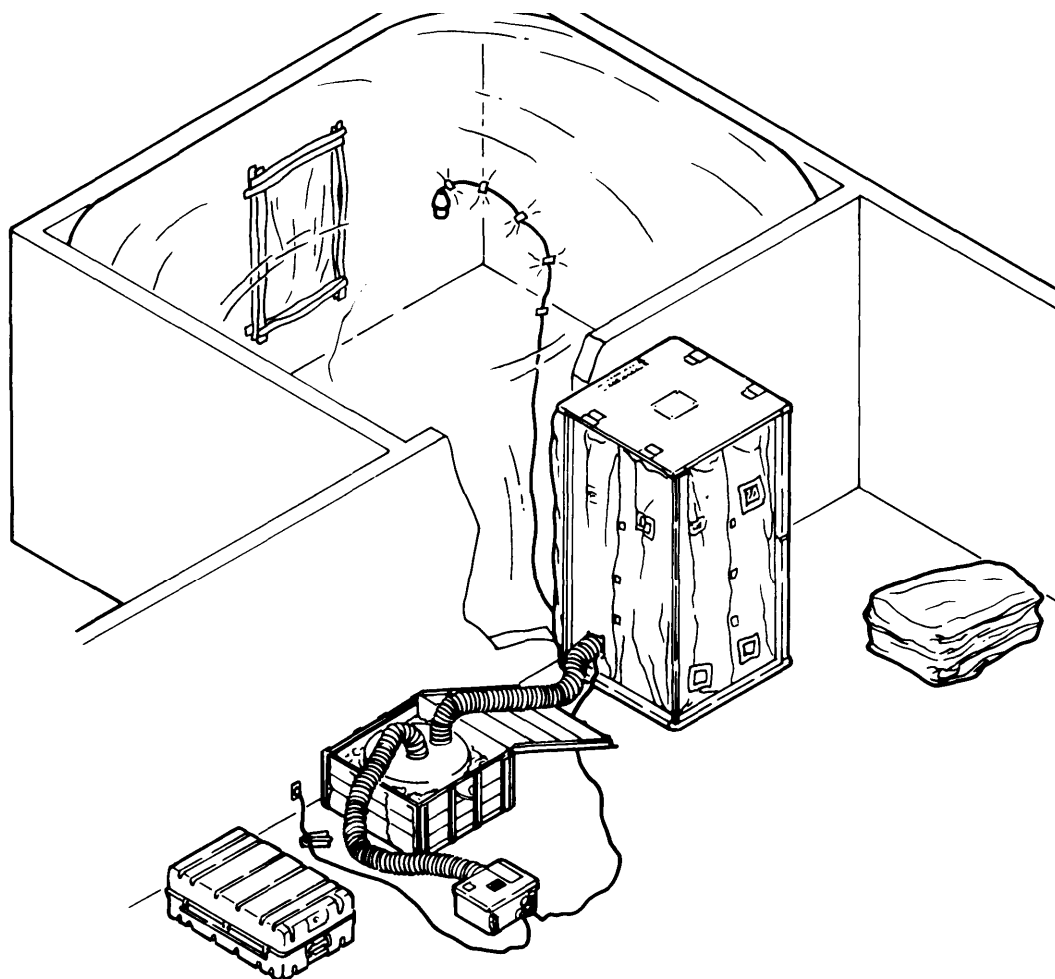

Type Classification:

STD (LCC-A);MSR 08866013

Use:

The M20 Simplified Collective Protection Equipment provides a radioactive particle, chemical and/or biological, contaminant-free work and rest area for up to 10 personnel, eliminating the need to wear individual protective equipment.

Description:

The M20 Simplified Collective Protection Equipment consists of a protective entrance, filter canister, and a room liner package. The protective entrance

consists of a free-standing collapsible aluminum frame, supporting self-closing rubber-coated fabric enclosure. The filter canister contains gas and particulate filters which remove chemical and biological agents and radioactive particles from input air. The room liners are made of plastic and attach to inside of protective entrance when inflated. A support kit contains all materials required to initiate and sustain operations of the SCPE. Included in the support kit are: plastic sheet, motor blower assembly, talking compound, talking gun, short air duct, protective adapter, power cable assembly, cable adapter, tape, extension light, support case, and long air duct.

Limitations:

The SCPE should be deployed in a structurally sound building. It must not be deployed outside, where it would be subjected to wind, rain, solar heat loading, or direct contact with liquid agents. The SCPE does not provide:

- (1) Environmental control equipment (heating and cooling).
- (2) A portable source of electrical power (electrical generator).
- (3) NBC detection devices.
- (4) Protection from liquid agents or nuclear radiation.

Tabulated Data:

NSN4240-01-166-2254
 Line item number C79000
 Unit of issueEA
 Basis of issue TOE/MTOE/TDA

Dimensions and Weights:

Entrance

Packaged Dimensions:

Length42 in. (106.68 cm)
 Width 42 in. (106.68 cm)
 Height : : : 6 in. (15.24 cm)
 Weight 118 lb(53.52 kg)

Erected Dimensions:

Length42 in. (106.68 cm)
 Width 42 in. (106.68 cm)
 Height82 in.(208.28cm)
 Weight118 lb(53.52 kg)

Support Kit:

Length38 in. (96.52 cm)
 Width 23 in. (58.42 cm)
 Height 14 in. (35.56 cm)
 Weight 102 lb(46.27 kg)

Room Liner Package:

Package

Length41in. (104.14 cm)
 Width 24 in.(60.96 cm)
 Height22 in. (55.88 cm)
 Weight90 lb (40.82 kg)

Deployed

Outer diameter 16 ft(4.88m)
 Height10 ft(3.05m)
 Weight30 lb(13.61 kg)

Operating Power Requirements:

Simplified Collective Protection Equipment

Power requirement1500 watts at 120 Vac
 Input voltages 120V 50/60Hz or
 240 V 50 HZ

Maximum capacity 1500 watts
 Airflow 200 (cfm)

Blower

Power requirement 13 amps at120Vac
 Input voltages 120 V 50/60Hz or
 240 V 50Hz

Airflow 200(cfm)

Extension Light

Power requirement 100 watts
 Input voltage110 Vac

Dome Light


Power requirement 1 amp at 28 Vdc
 Input voltage,110 Vac

Shipping and Storage Data:

Type packing Special
 Special packing number P5-19-8000
 Type storage Warehouse

References:

TM 3-4240-288-12&P

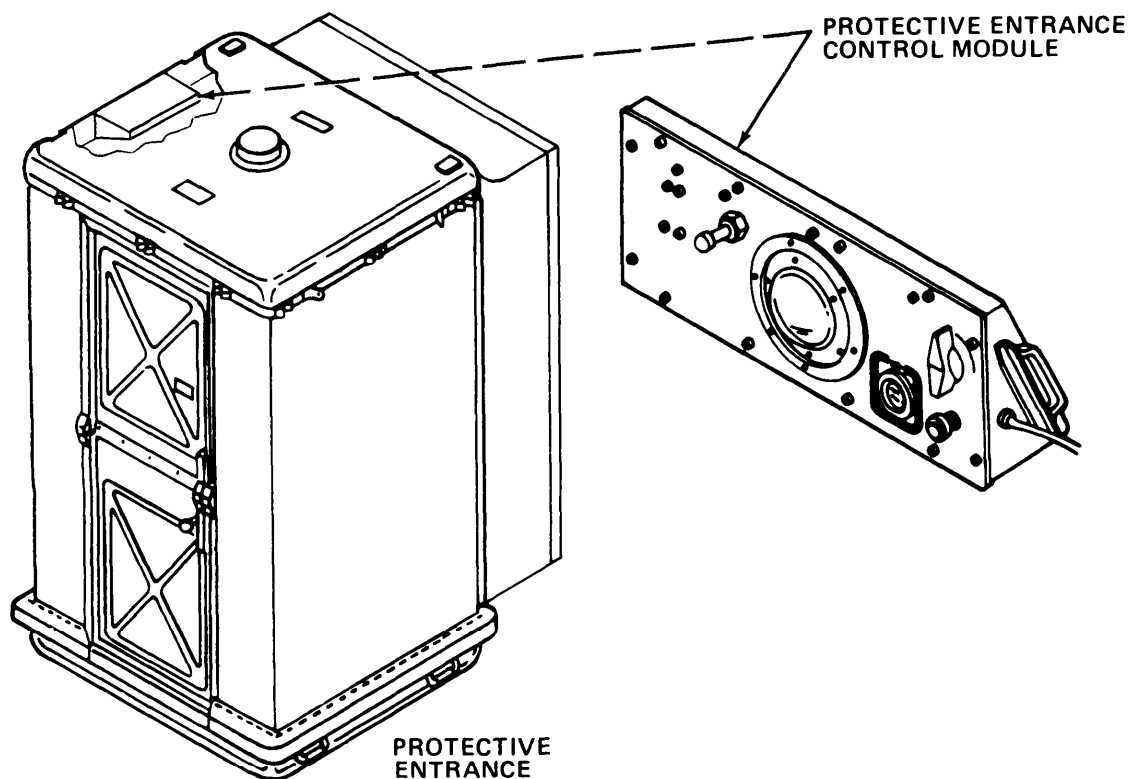ENTRANCE, PROTECTIVE, PRESSURIZED: COLLAPSIBLE, M13, M15, M16*Type Classification:*

Not separately type classified.
Component of various other systems.

Use:

The protective entrance provides a pressurized transition area to allow individual decontamination and then entry or exit from afield shelter in a chemical or biological agent contaminated area.

Description:

The protective entrance consists of top and bottom shells, a door and frame assembly which supports the entrance front, two support assemblies which support the rear, an impermeable fabric wall assembly connecting the top and bottom shells, and a protective cap that covers the inlet air duct. A protective entrance control module provides purge timing, low pressure warning, and white or blackout red light for the protective entrance.

Functioning:

Filtered air and pressurization is provided by a gas-particulate filter unit through the air duct inlet. The protective entrance control module, operating on 28 Vdc power, contains a timer for measuring the purge period, low pressure warning indicator, and lighting.

Limitations:

Personnel entering the M15 and M16 protective entrance from the outside must wait five minutes before entering the shelter the M13 protective entrance requires a ten minute wait due to the larger total volume.

Tabulated Data:

NSN:

M13	4240-01-155-9971
M15.....	4240-01-165-6786
M16.....	4240-01-240-4367

Line item number.....N/A
 Unit of issue Each
 Basis of issue.....TOE/MTOE
 Weight145 lb
 Dimensions (packaged) 49.3 x 43.3 x 12.5 in.
 Dimensions (erected) 49.3 x 43.3 x 85.4 in.

Performance:

Control module
 Power requirements 2 A at 28 Vdc
 Input voltage 28 Vdc

Difference Between Models:


The main difference between the protective entrances is the size of the outlet plate and the length of the transition (fabric assembly between the entrance and shelter). The M 13 protective entrance contains an additional caution plate instructing performance of the purge cycle twice (ten minute purge period) before entering the shelter.

Shipping and Storage Data:

Not available.

References:

TM 3-4240-4318-20&P

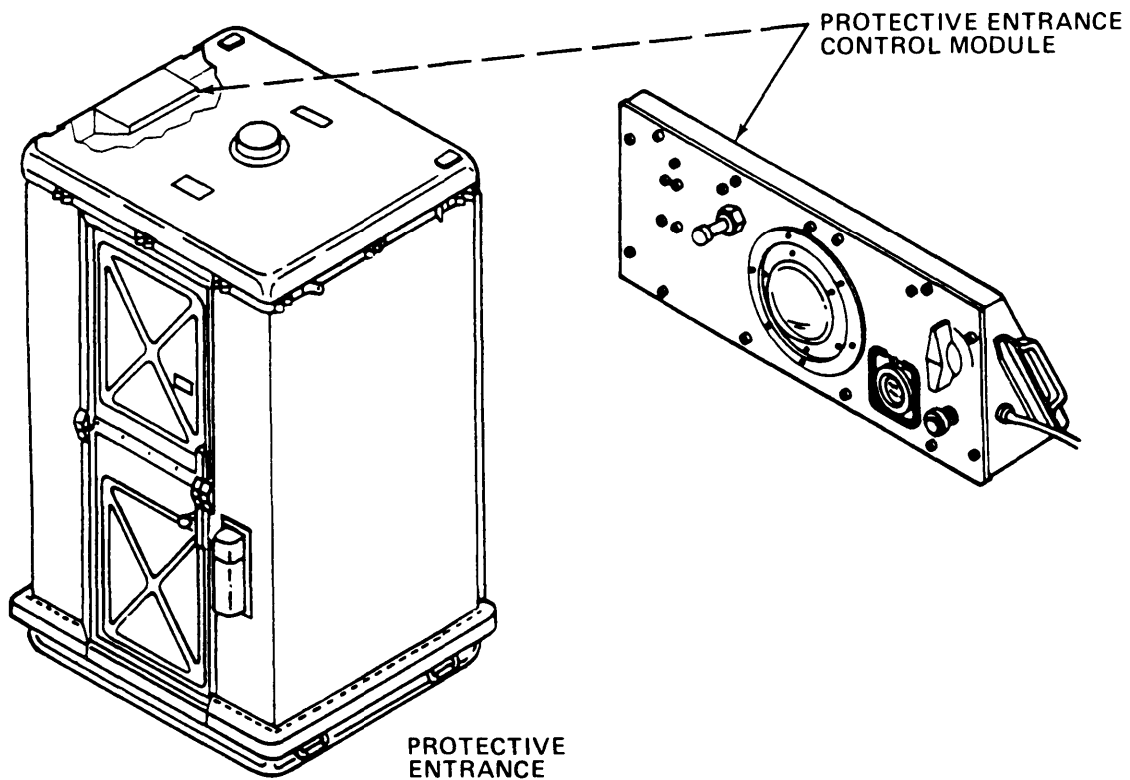ENTRANCE, PROTECTIVE, PRESSURIZED: COLLAPSIBLE, M14*Type Classification:*

Not separately type classified,
Component of various other systems.

Use:

The protective entrance provides a pressurized transition area to allow individual decontamination and then entry to a field shelter in a chemical or biological agent contaminated area. The M14 protective entrance is used with the I-HAWK and PATRIOT shelters.

Description:

The *protective* entrance consists of top and bottom shells, a door and frame assembly which supports the entrance front, two support assemblies which support the rear, impermeable fabric wall assembly connecting the top and bottom shells,

and a protective cap that covers the inlet air duct. A protective entrance control module provides purge timing, low pressure warning, and white or blackout red light for the protective entrance.

Functioning:

Filtered air and pressurization is provided by a gas-particulate filter unit through the air duct inlet. The protective entrance control module, operating on 28 Vdc power, contains a timer for measuring the purge period, low pressure warning indicator, and lighting.

Limitations:

Personnel entering the M14 protective entrance from the outside must wait five minutes before entering the shelter.

Tabulated Data:

NSN:
M14 entrance4240-01-105-5521
Control module4240-01-115-0996
Line item number.....N/A
unit of issueEach
Basis of issue.TOE/MTOE
Weight 139 lb
Dimensions (packaged) 49.3 x 43.3 x 12.5 in.
Dimensions (erected) 49.3 x 43.3 x 85.4 in.

Performance:

Control module
Power requirements 2 A at 28 Vdc
Input voltage28 Vdc


Shipping and Storage Data:

Weight295 lb
Dimensions53.6 x 46.8 x 18.0 in.
Cube 26.091 cu ft
Drawing Number.....5-9-6201-50

References:

TM 3-4240-302-30&P-4
TM 3-4240-323-20&P

FILTER UNIT, GAS-PARTICULATE: 200 CFM, 208 V, 400 HZ, M56

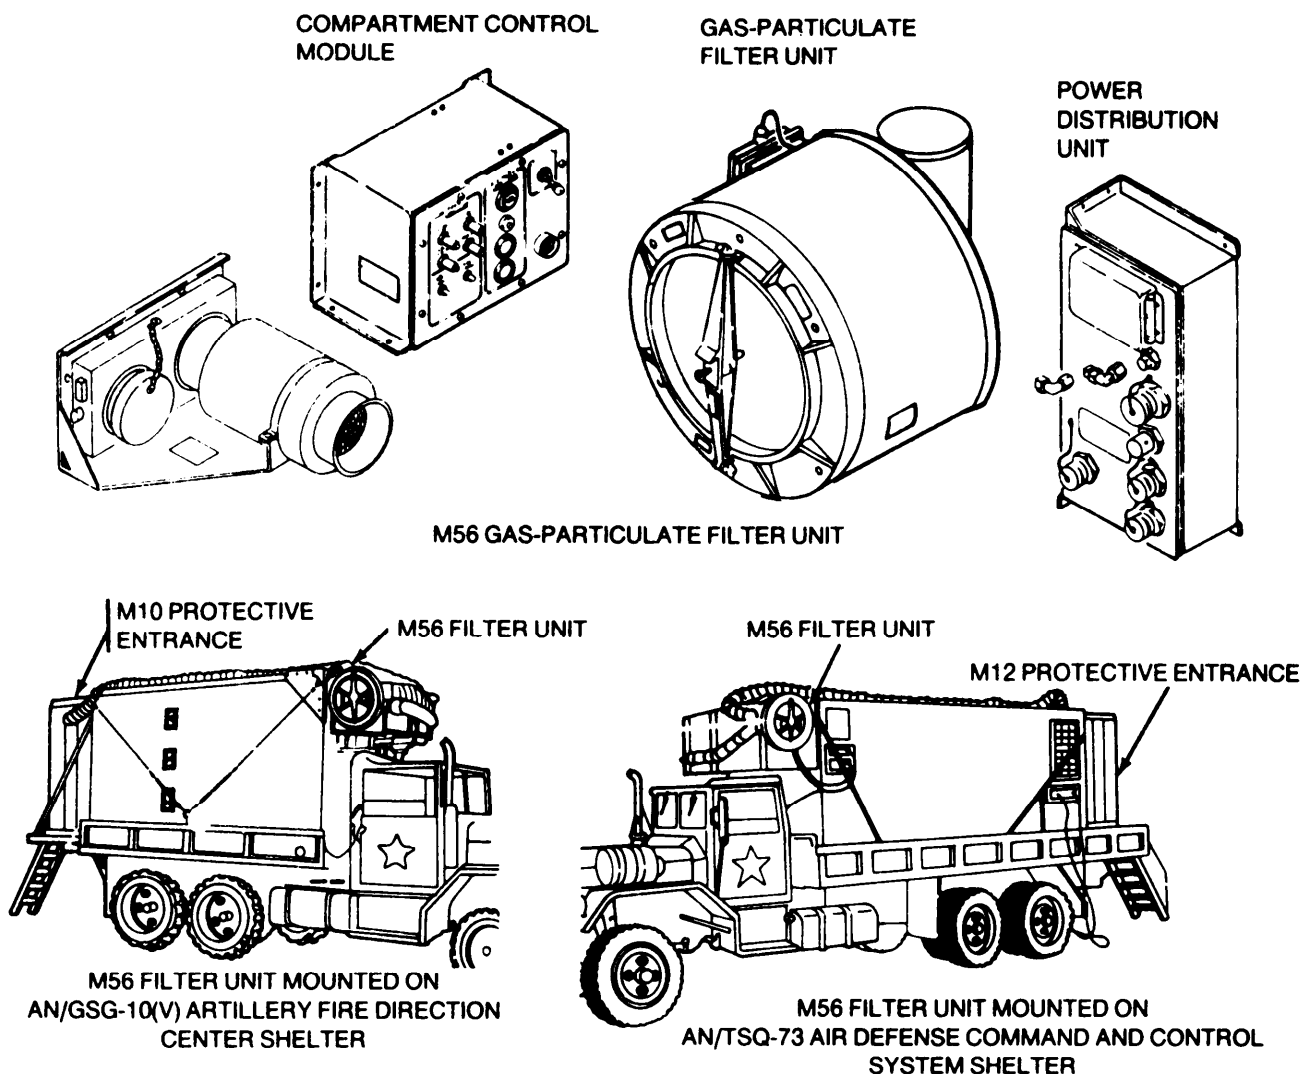

Type Classification:

STG (LCC-A); MSR 05766018

Use:

To supply filtered air and maintain a positive pressure in a vehicle-mounted shelter and protective entrance during chemical or biological attacks. The M56 gas-particulate filter unit is used on the AN/GSG-10(V) TACFIRE S-490 and S-492 shelters and the AN/SQ-73 shelter.

Description:

The M56 gas-particulate filter unit consists of a gas-particulate filter set, a filter housing and fan assembly, an airflow valve, a power distribution unit, and a compartment control module.

Functioning:

The M56 gas-particulate filter unit removes chemical and biological agents and dust from the air it supplies to the protective entrance and shelter. The M56 filter unit generates internal positive pressure. This prevents toxic agents from infiltrating into personnel compartments, which are not airtight. Installation kits provide airduct hoses, cables, and connectors for installation and interface of the M56 filter unit and protective entrances on the shelters.

Tabulated Data:

NSN	4240-00-237-0277
Line item number	H48904
Unit of issue	Each
Basis of issue	TOE/MTOE

Filter unit:

Weight 123 lb
 Dimensions 31 x 36 x 32 in.

Power distribution unit:

Weight 16 lb
 Dimensions 18.50 x 8.25 x 4.25 in.

Compartment control module:

Weight 9 lb
 Dimensions 7.70 x 11.75 x 6.50 in.

Performance:

Filter unit:

Power requirements 800 Watts
 Input voltage 208 V, 400 Hz,
 3-phase
 AirFlow 200 cfm maximum

Airflow valve:

Power requirements 1 amp max
 at 28 Vdc
 Airflow 40 cfm min at 20 in.
 water gage

Power distribution unit:

Input voltage 208 V, 400 Hz, 3-phase
 Maximum capacity 3.5 kW

Compartment control module:

Power requirements 1 amp max at 28 Vdc


Shipping and Storage Data:

Type pack 1 per wooden box
 Weight 214 lb
 Cube 23 cu ft
 Type storage Warehouse
 Drawing number 5-19-6402

References:

TM 3-4240-284-20&P
 TM 3-4240-284-30&P
 TM 3-4240-286-20&P
 TM 3-4240-286-30&P
 TM 3-4240-322-20&P
 TM 9-1430-651-12 (AN/TSQ-73)
 TM 9-1430-652-10-3 (AN/TSQ-73)
 TM 11-7440-240-10-1 (AN/GSG-10(v))
 TM 11-7440-241 -10-1 (AN/GSG-10(V))

FILTER UNIT, GAS-PARTICULATE, 200 CFM, 208 V, M84

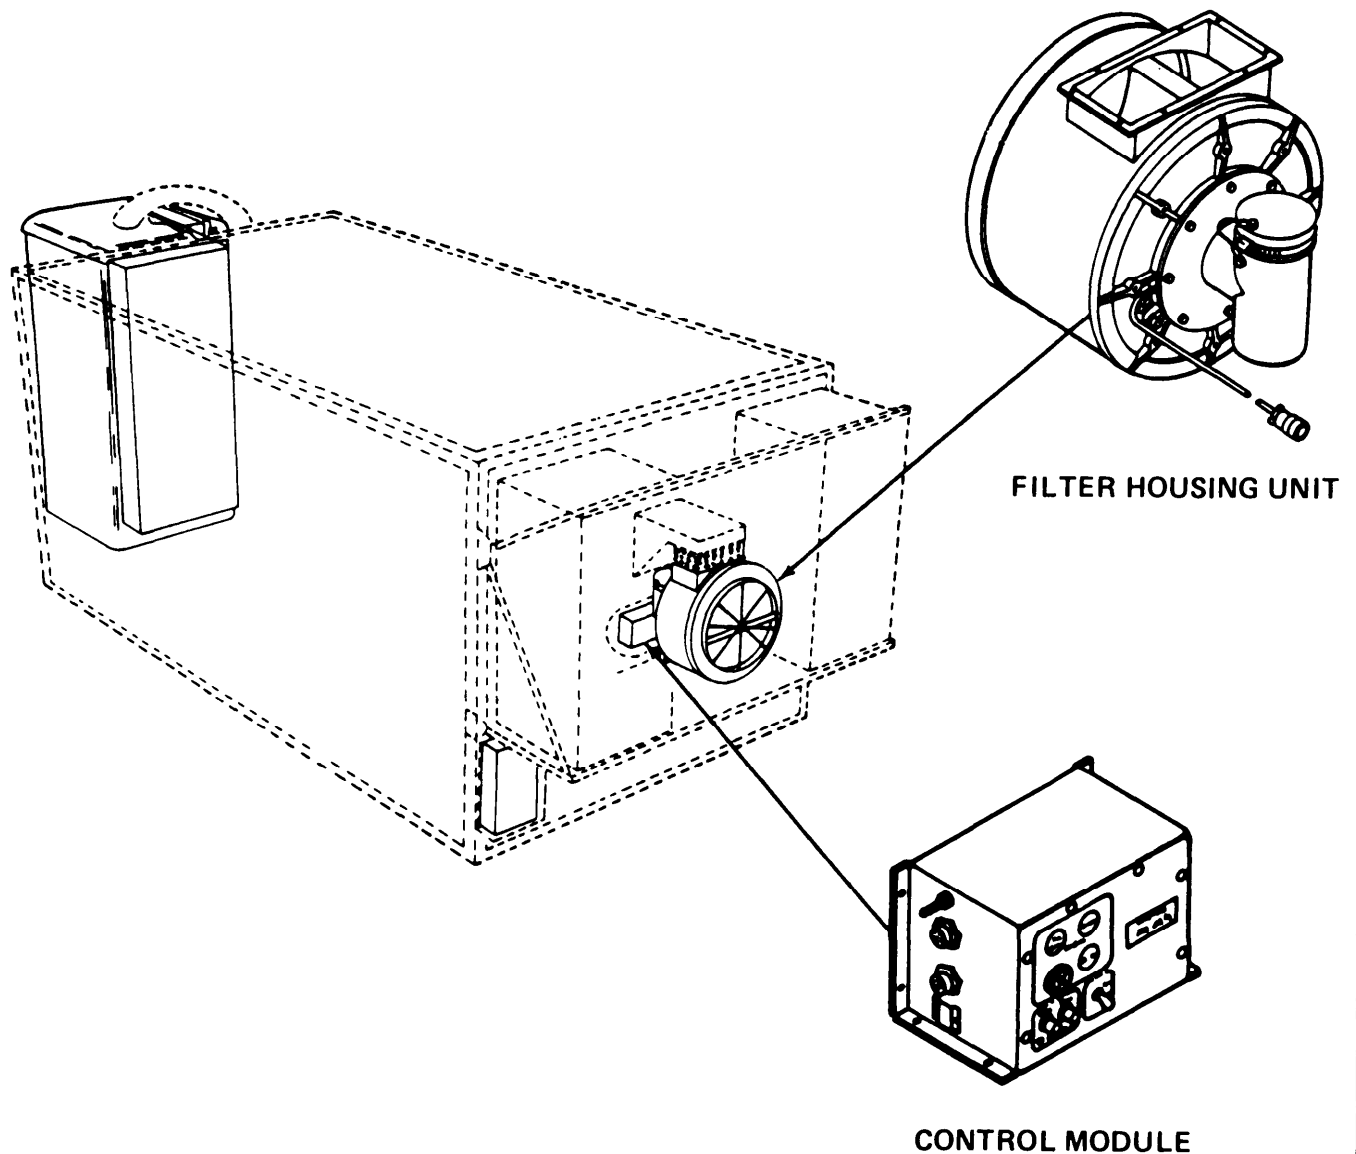

Type Classification:

Not separately type classified,
Component of various other systems.

Use:

Provides filtered air under positive pressure to field shelters allowing operation in a chemical-biological agent contaminated area

Description:

The M84 gas-particulate filter unit (GPFU) system includes the filter housing unit and compartment control module. Inner and outer access covers on the filter unit housing permit changing of filters.

Functioning:

The M84 GPFU removes toxic gases and dust from the air supplied to the vehicle, van, or shelter (with or without protective entrance). The main fan draws outside air through the inlet tee and forces it through the fitter unit to the enclosure. The continuous input of filtered air creates a positive pressure system that permits crew members to perform normal functions in the protected enclosure without protective masks and clothing. Pressure sensing components in the compartment control module provide a low pressure warning.

Tabulated Data:

NSN	4240-01-149-1719
Line item number	N/A
Unit of issue	Each
Basis of issue	TOE/MTOE
Weight:	
M84 GPFU	256 lb
Compartment control module	16 lb
Dimensions:	
M84 GPFU	31 x 36 x 32 in.
Compartment control module	7.70 x 11.75 x 8.25 in.

Performance:

Power requirements:	
M84 GPFU	1100W
Compartment control module	1A max at 28 Vdc
Input voltage:	
M84 GPFU	208 V, 400 Hz, 3-phase
Compartment control module	208 V, 400 Hz, 3-phase, max capacity 3.5 kW
Airflow:	
M84 GPFU	200 cfm rated (actual may be higher)
Particulate filter	200 cfm
Gas fitter	200 cfm


Shipping and Storage Data:

Weight	19.0 lb
Dimensions	17.7 x 12.9 x 13.0 in.
Cube	1.718 cu ft
Specification	MIL-F-51544
Drawing	5-9-6830

References:

TM 3-4240-302-30&P-2
TM 3-4240-333-20&P

FILTER UNIT, GAS-PARTICULATE, 400 CFM, 208 V, 400 Hz, M59

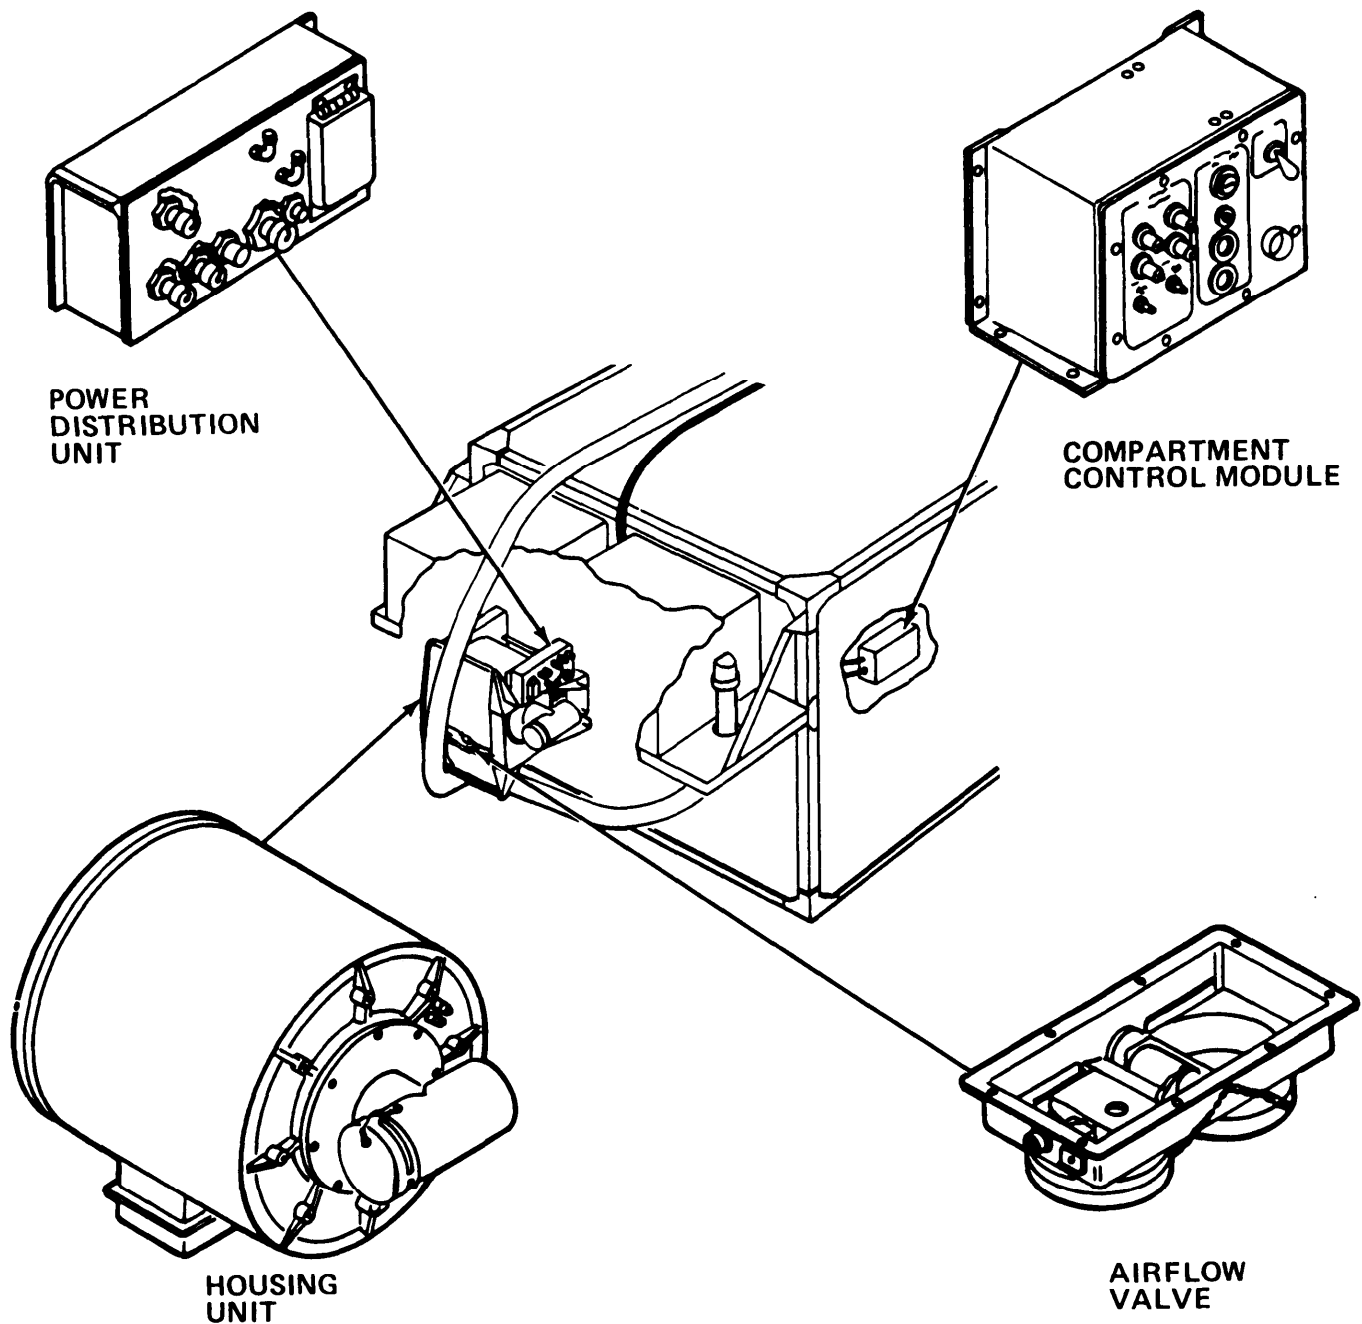

Type Classification:

Not separately type classified.

Component of various other systems.

Use:

Provides filtered air under positive pressure to field shelters allowing operation in a chemical-biological agent contaminated area

Description:

The M59 gas-particulate fitter unit (GPFU) system includes the filter housing unit, airflow valve, power distribution unit, and compartment control module. Inner and outer access covers on the filter unit housing permit changing of filters.

Functioning:

The M59 GPFU removes toxic gases and dust from the air supplied to the vehicle, van, or shelter (with or without protective entrance). The main fan draws outside air through the air inlet and forces it into the fitter unit. The fan forces air from the filter unit to the airflow valve. The airflow valve directs filtered air to the protected enclosure. Pressure sensing components in the compartment control module automatically adjust the airflow valve to maintain a positive pressure within the vehicle, van, or shelter.

Tabulated Data:

NSN	4240-00-237-0223
Line item number	N/A
Unit of issue	Each
Basis of issue	TOE/MTOE
Weight:	
M59 GPFU	256 lb
Power distribution unit	16 lb
Compartment control module	9 lb
Dimensions:	
M59 GPFU	34 X 36 X 32 in.
Power distribution unit	18.50 x 8.25
	x 4.25 in.
Compartment control module	7.70 x 11.75
	x 6.50 in.

Performance:

Power requirements:

M59 GPFU	1700W
Airflow valve	1Amaxat28Vdc
Compartment control module	1 A max
	at 28 Vdc

Input voltage:

M59 GPFU	208 V, 400 Hz, 3-phase
Power distribution unit	208 V, 400 Hz
	3-phase, max capacity 3.5 kW
Airflow valve	28 Vdc
Compartment control module	28 Vdc

Airflow:

M59 GPFU	400 cfm max
Airflow valve	40 cfm min at
	20.0 in. wg.
Particulate filter	400 cfm (200 cfm each)
Gas filter	400 cfm (200 cfm each)


Shipping and Storage Data:

Instructions for administrative storage are provided in TM 3-4240-324-20&P.

References:

- TM 3-4240-324-20&P
- TM 3-4240-302-30&P-1
- TM 3-4240-302-30&P-5
- TM 3-4240-302-30&P-6

FILTER UNIT, GAS-PARTICULATE, 400 CFM, 208 V, 400 Hz, M87

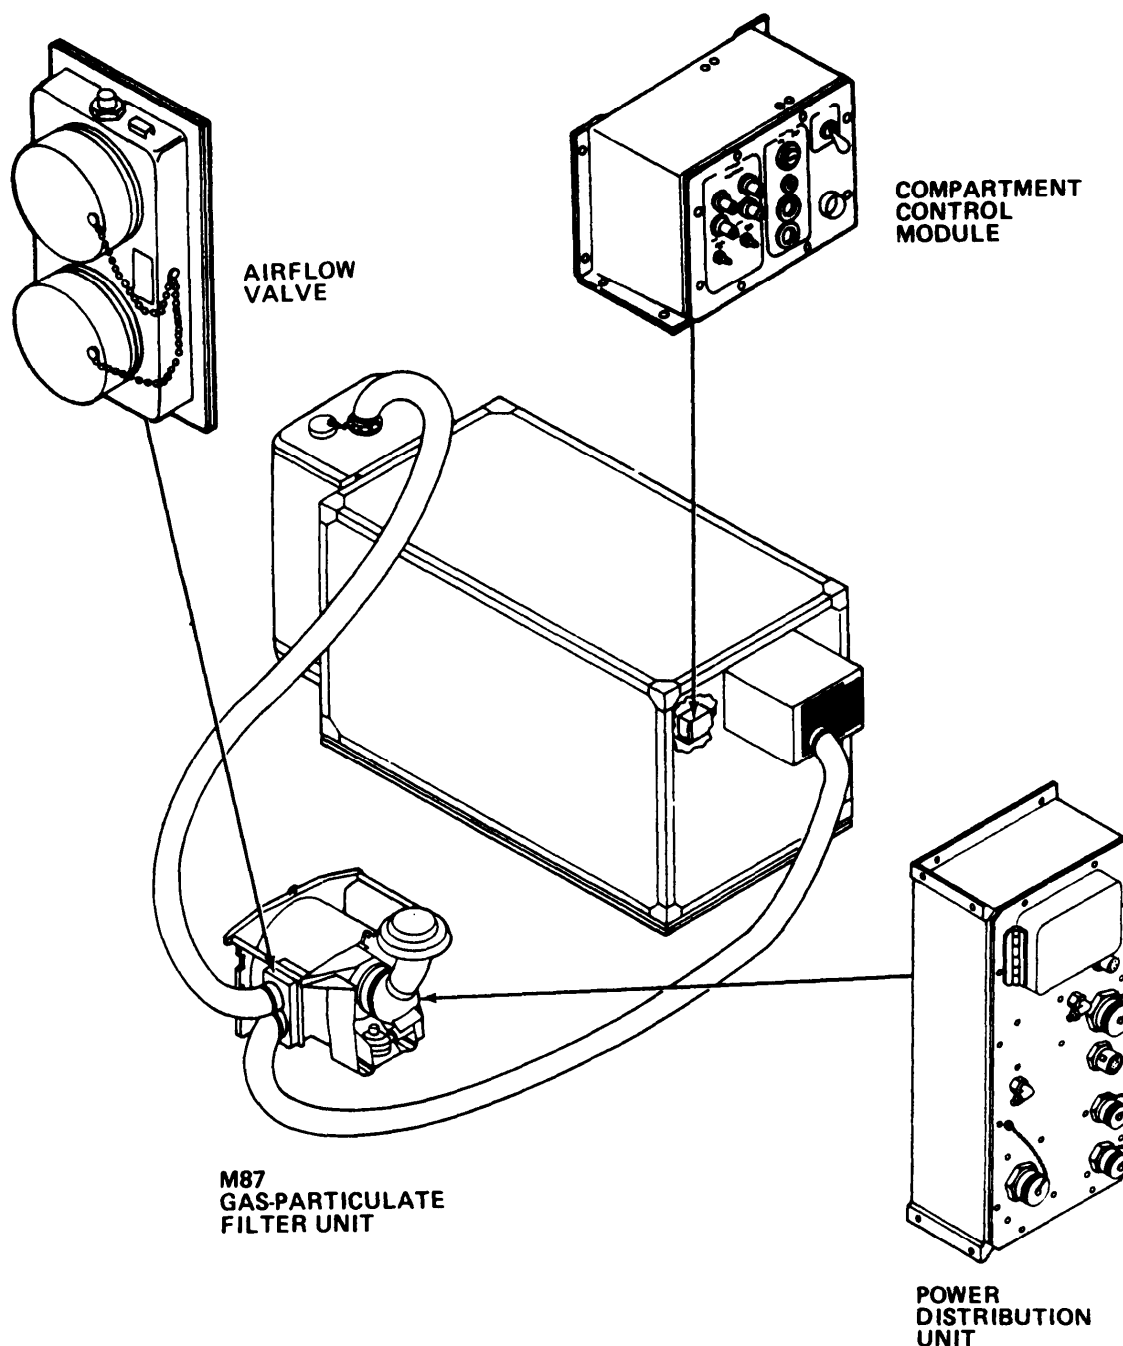

Type Classification:

Not separately type Classified.
Component of various other systems.

Use:

Provides filtered air under positive pressure to field shelters allowing operation in a chemical-biological agent contaminated area

Description:

The M87 gas-particulate filter unit (GPFU) system includes the filter housing unit, airflow valve, power distribution- unit and compartment control module. Inner and outer access covers on the filter unit housing permit changing of filters.

Functioning:

The M87 GPFU removes toxic gases and dust from the air supplied to the vehicle, van, or shelter (with or without protective entrance). The main fan draws outside air through the air inlet and dust collector and forces air into the filter unit and airflow valve. The airflow valve directs filtered air to the protected enclosure. Pressure sensing components in the compartment control module automatically adjust the airflow valve to maintain a positive pressure within the vehicle, van, or shelter.

Tabulated Data:

NSN	4240-01-192-7234
Line item number	N/A
Unit of issue	Each
Basis of issue	TOE/MTOE
Weight:	
M87 GPFU	256 lb
Power distribution unit	16 lb
Compartment control module	9 lb
Dimensions:	
M87 GPFU	34 x 36 x 32 in.
Power distribution unit	18.50 x 8.25 x 4.25 in.
Compartment control module	7.70 x 11.75 x 6.50 in.


Performance:

Power requirements:	
M87 GPFU	1600 W

Power distribution unit	208 V. 400 Hz, 3-phase
Airflow valve	1A max at 28 Vdc
Compartment control module	1 A max at 28 Vdc
Input voltage:	
M87 GPFU	208 V. 400 Hz, 3-phase
Power distribution unit	208 V. 400 Hz, 3-phase, max capacity 3.5 kW
Airflow valve	28 Vdc
Compartment control module	28 Vdc
Airflow	
M87 GPFU	400 cfm max
Airflow valve	40 cfm min at 20.0 in. wg
Particulate filter	200 cfm each
Gas filter	200 cfm each

Shipping and Storage Data
Not available.

References:	
TM 3-4240-317-20&P	
TM 3-4240-302-30&P-1	
TM 3-4240-302-30&P-5	
TM 3-4240-302-30&P-6	

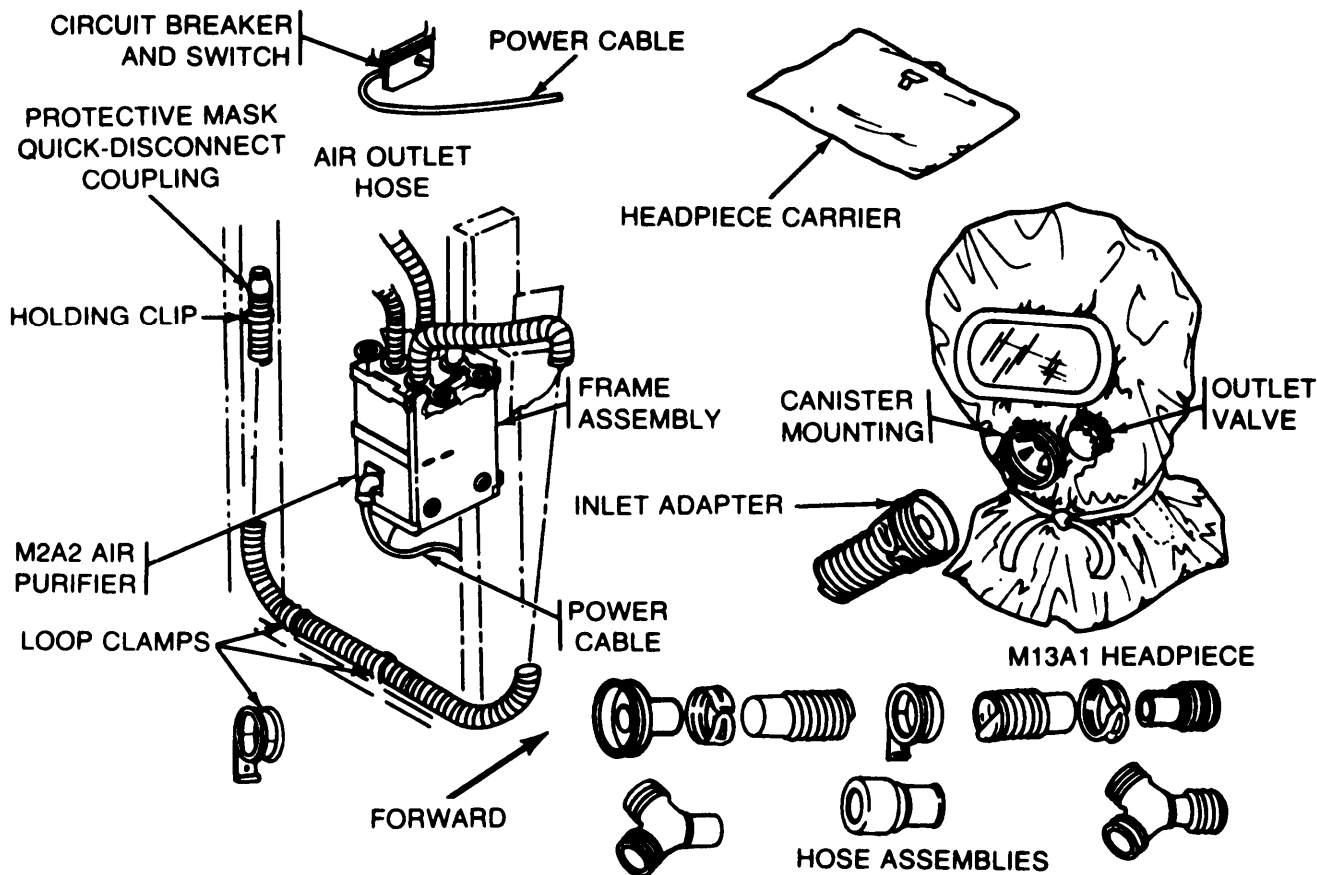FILTER UNIT, GAS-PARTICULATE: ARMORED AMBUANCE, SIX-MAN, 12 CFM, M14*Type Classification:*

STD (LCC-A); AMCTC 252064

Use:

To remove toxic chemical and biological agents from contaminated air and supply purified air to six or fewer occupants of an armored ambulance.

Description:

The M14 12 CFM six-man armored ambulance gas-particulate filter unit consists of an M2A2 air purifier, a circuit breaker and switch, airhose assemblies, six M13A1 hospital collective protector headpieces with carriers, and installation hardware.

Functioning:

The M14 filter unit is installed in an M113A1 APC, which has been converted to an armored ambulance with a litter kit. The M2A2 air purifier separates dust and the filters remove contaminants from the air. The purified air is forced through the hoses to the M13A1 headpieces and to the M25A1 mask of the ambulance driver. The positive pressure also aids breathing and

reduces leakage of contaminated air around the edges of the headpieces and mask facepiece.

Limitations:

The filter unit does not protect against carbon monoxide gas.

Tabulated Data:

NSN	4240-00-010-5267
Line item number	H48896
Unit of issue	Each
Basis of issue	MTOE
Air purifier:	
Weight	20 lb
Dimensions	13 x 7.5 x 6 in.

*Performance:**Electrical characteristics (air purifier):*

Vac (60 Hz)	27.5 volts
Vdc	24 volts
Current	3 amperes
Airflow capacity	12 cfm


Shipping and Storage Data:

Type pack 1 per fiberboard box
Weight 53 lb
Cube 2 cu ft
Type storage Warehouse
Drawing number LM 5-19-1828

References:

TB 43-0002-71
TM 3-4240-276-30&P
TM 3-4240-282-L
TM 9-2300-257-10
TM 9-2300-257-20
TM 750-154

FILTER UNIT, GAS-PARTICULATE: GAS ENGINE DRIVEN, 300 CFM, ABC-M6A1

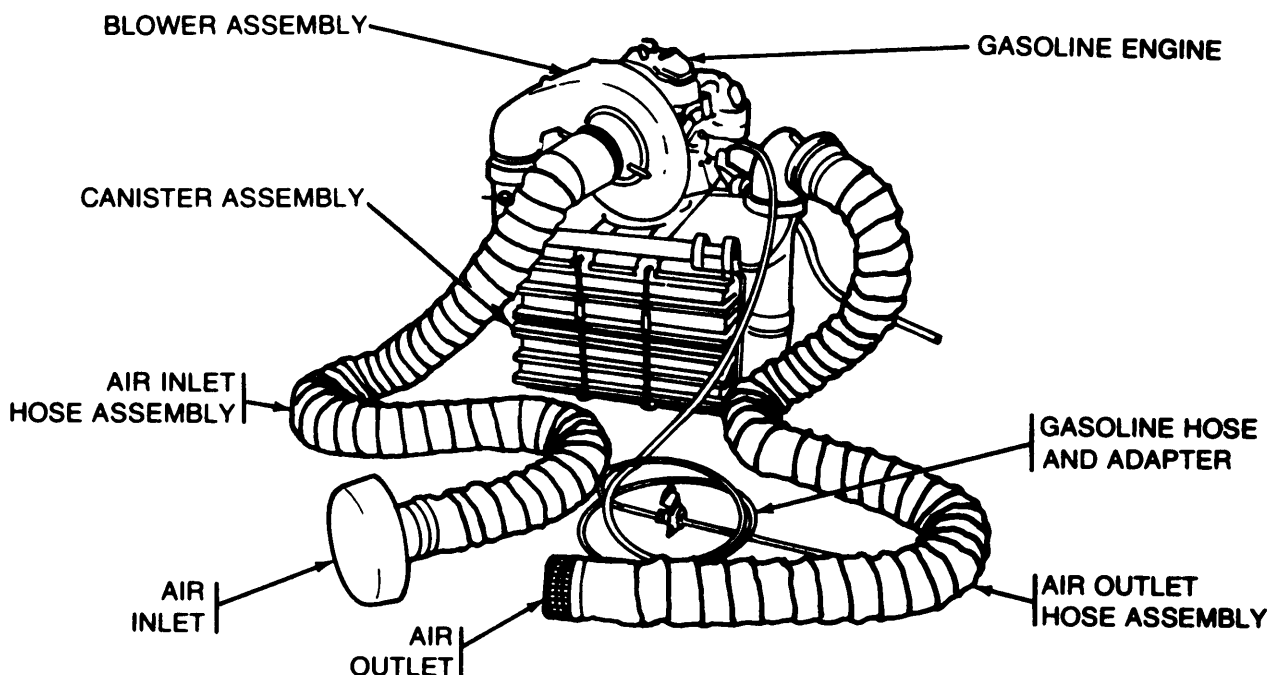

Type Classification:

ABC-M6A1 : STD (LCC-A); AMCTC 164564

Use:

To supply filtered air to maintain a toxic-free pressurized atmosphere in a protective shelter for about 50 people.

Description:

The ABC-M6A1 300 CFM gas engine driven gas-particulate filter unit consists of a 300 CFM blower, a canister assembly containing two 150 CFM MI O gas filters and two 150 CFM M9A1 particulate filters, an air inlet hose assembly, an air outlet hose assembly, and a 1 1/2-horsepower gasoline engine.

Differences Between Models:

The 1 1/2-horsepower gasoline engine is issued in two versions. One has an integral gasoline tank. The other has an adapter for using a standard military 5-gallon gasoline can in lieu of a gasoline tank.

Functioning:

The ABC-M6A1 filter unit can be operated either inside or outside a protective shelter.

a. *Inside Operation.* Contaminated air passes directly from the air inlet through the canister air inlet into the canister assembly. Purified air leaving the canister assembly passes through the canister air outlet into the

blower air inlet. The blower forces purified air through the blower air outlet directly or through the air outlet hose assembly into the protective shelter.

b. *Outside Operation.* contaminated air passes directly from the air inlet into the Mower air inlet. The blower forces the contaminated air through the blower air outlet and the canister air inlet into the canister assembly. Purified air leaving the canister assembly group passes through the canister air outlet and air outlet hose assembly into the protective shelter.

Tabulated Data:

NSN	4240-00-889-2316
Line item number	H49733
Unit of issue	Each
Basis of issue	MTOE/TDA: AR 310-34
Weight	325 lb
Length	36 in.
Width	31 in.
Height	37 in.
Floor space required	7.7 Sq ft

Performance:

Rated output of the	
airblower	300 cfm
Gasoline engine classifications and ratings:	
Horsepower	1 1/2 rpm 3600rpm

TM 43-0001-26-1

Type	Single-cylinder, overhead air cooled, 4-cycle
Rated speed	3600 rpm
starting	Manual; rope on starting
Spark plug gap	0.025 in.
Fuel consumption	1/2pt/hr
Rotation	Power shaft end (counterclockwise)

Shipping and Storage Data:


Type pack 1per wooden crate

Weight	548 lb
cube	37.1 cu ft
Type storage	Warehouse
Drawing number	5-19-18001

References:

TM 3-221
TM 3-4240-203
TM 3-4240-241-12
TM 3-4240-241-20P
TM 3-4240-241-35
TM 3-4240-241-35P

FILTER UNIT, GAS-PARTICULATE: HOSPITAL, SIX-MAN, 12 CFM, ABC-M7A1

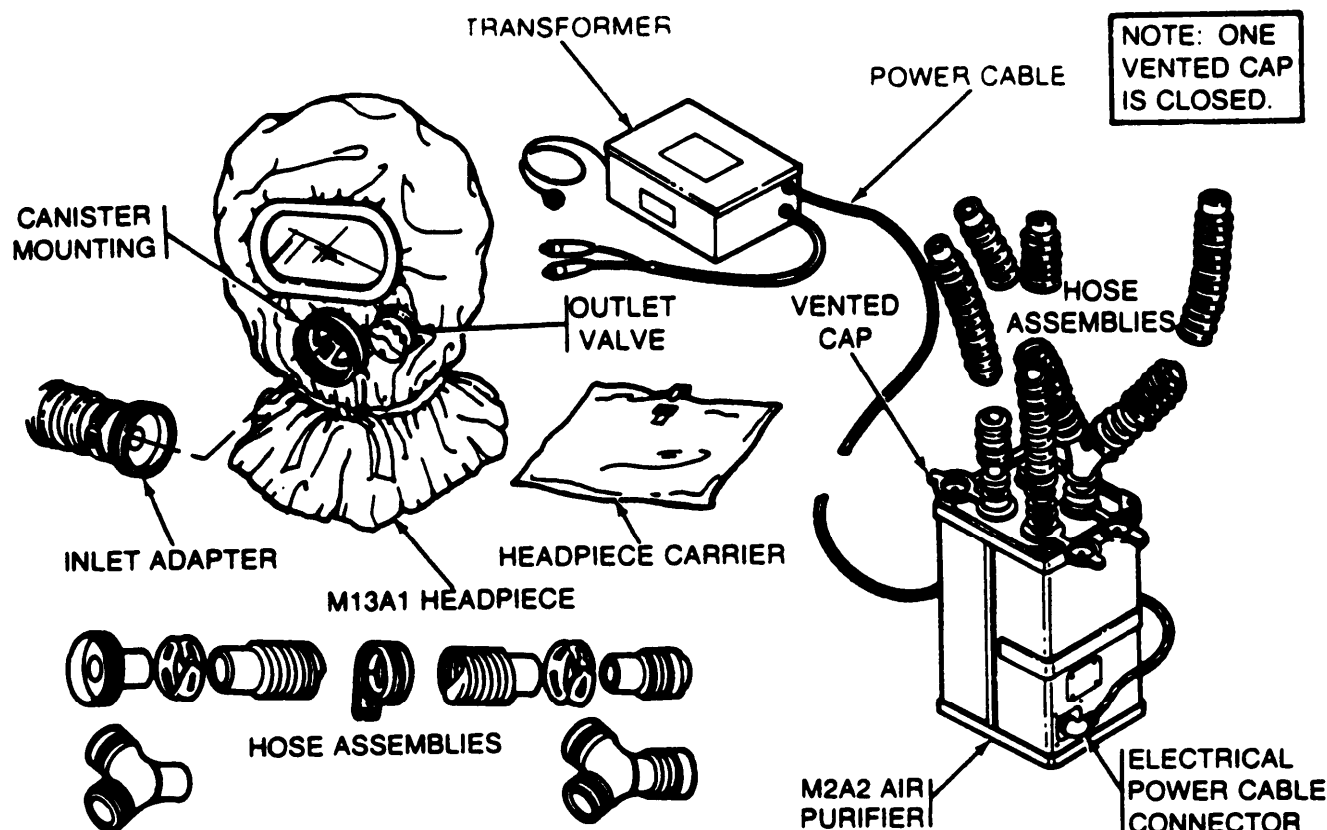

Type Classification:

STD (LCC-A); CCTC 302755

Use:

To remove toxic chemical and biological agents from contaminated air and supply purified air to six or fewer bedridden hospital patients.

Description:

The ABC-M7A1 12 CFM, six-man hospital, gas-particulate filter unit consists of an M2A2 air purifier, a transformer unit, airhose assemblies, and six M13A1 hospital collective protector headpieces with carriers.

Functioning:

The centrifugal fan in the M2A2 air purifier draws air in and blows it through the air precleaned and gas and particulate filters. The air precleaned separates dust and the filters remove contaminants from the air. The purified air passes through the hoses to the M13A1 headpieces and to the M25A1 mask of

the ambulance driver. The positive pressure also aids breathing and reduces leakage of contaminated air around the periphery of the headpieces and mask when worn.

Limitations:

The filter unit does not protect against carbon monoxide gas.

Tabulated Data:

NSN	4240-00-203-3999
Line item number	H50418
Unit of issue	Each
Basis of issue	AR 310-34; TOE/MTOE/TDA
Air purifier:	
Weight	20 lb
Dimensions	13.30 x 7.50 x 6.00 in.

Performance:

External electrical power sources	24 Vdc or 115 Vac (60 Hz)
-----------------------------------	---------------------------

TM 43-0001-26-1

Air purifier:

Vac (60 Hz)27.5 volts
Vdc24 volts
current3 amperes
Airflow capacity12 cfm
Delivery to each
headpiece1.75 to 2.3 cfm
Maximum personnel
(protected) Six patients

Shipping and Storage Data:


Type pack 1per wooden box

Weight 138 lb
Cube5.5 cu ft
Type storageWarehouse
Drawing number5-66-273

References:

TB 34-9-153
TM 3-4240-201-13;-20P;-35P
TM 3-4240-276-30&P
TM 3-4240-282-L
TM 750-154

FILTER UNIT, GAS-PARTICULATE: TANK, 20 CFM, M13 AND M13A1

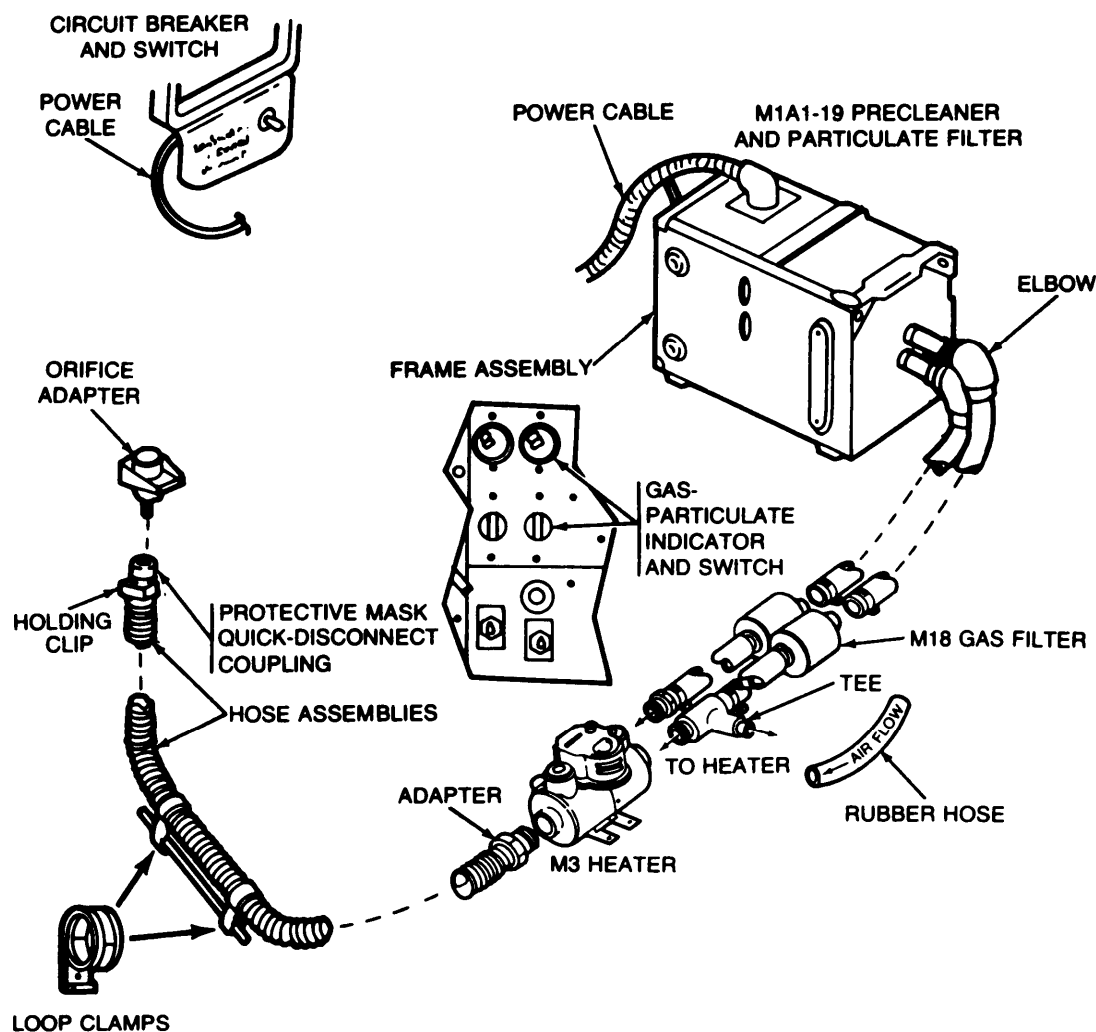

Type Classification:

M13A1: STD (LCC-A); CCTC 411663

M13: STD (LCC-B); CCTC 411663

Use:

To remove toxic chemical and biological agents from contaminated air and supply purified air through the M25 and M25A1 tank masks of the crew members of armored vehicles.

Description:

The M13A1 20 CFM tank gas-particulate filter unit consists of an M1A1-19 precleaner and particulate filter assembly, two M1810 CFM gas filter's, a circuit breaker and switch, four M3 electric air heaters, rubber air hoses and hose assemblies, and installation hard-

ware such as a frame assembly, cables, loop dampers, ratchet damp, holding clips, elbows, and tees.

Differences Between Models:

The M13 and M13A1 filter units are identical except for minor differences in installation hardware. The installation hardware for the M 13 filter unit is issued in an M29 installation kit. The installation hardware for the M13A1 filter unit is issued in an M29A1 installation kit. M13 filter units are installed solely on M60 combat tanks. Components of the M13A1 filter units are installed on numerous other combat vehicles such as M60-series tanks, M1 tanks, and the M728 combat engineer vehicle. The configuration of the M3 heater varies with the manufacturer, but its functions are the same.

Functioning:

The electric-motor driven, Mower fan in the M1A1 precleaner housing draws air in and blows in through the precleaner and the M19 particulate filter. The precleaner separates dust and the filter removes small particles of contaminants from the air. The filtered air is then blown through the M18 gas fitters, which filter toxic chemical agent vapors from the contaminated air. The purified air passes through the hoses to the M3 heaters where the air is warmed as required by the crew member. Pressurized purified air is provided to the mask. The positive pressure also aids breathing and reduces leakage around the edges of the mask facepiece when worn.

Limitations:

The filter unit does not protect against carbon monoxide gas. The filters must be changed in accordance with criteria established in the operator's and organizational maintenance manual for the vehicle.

Tabulated Data:

NSN:	
M13A1	4240-00-964-9061
M13	4240-00-601-8372
Line item number	H50555
Unit of issue	Each

Basis of issue	AR 310-34: MTOE/TDA
M1A1 -19 precleaned and particulate filter:	
Weight	15.75 lb
Dimensions,	13 x 7.5x 6 in,

Performance:

M1A-19 precleaned and particulate filter:	
Vac (60 Hz)	27.5 Volts
Vdc	24 Volts
Current	3 amperes
Airflow capacity	
M3 heater	20 cfm


Shipping and Storage Data:

Type pack	1 per fiberboard box
Weight	70 lb
cube	2.7 cu ft
Type storage	Warehouse
Drawing number:	
M13A1	LM 5-19-3051
M13	LM 5-19-1790

References:

TM 3-4240-276-30&P
TM 3-4240-282-L
TM 750-155

FILTER UNIT, GAS-PARTICULATE: TANK, 12 CFM, M8A2 AND M8A3

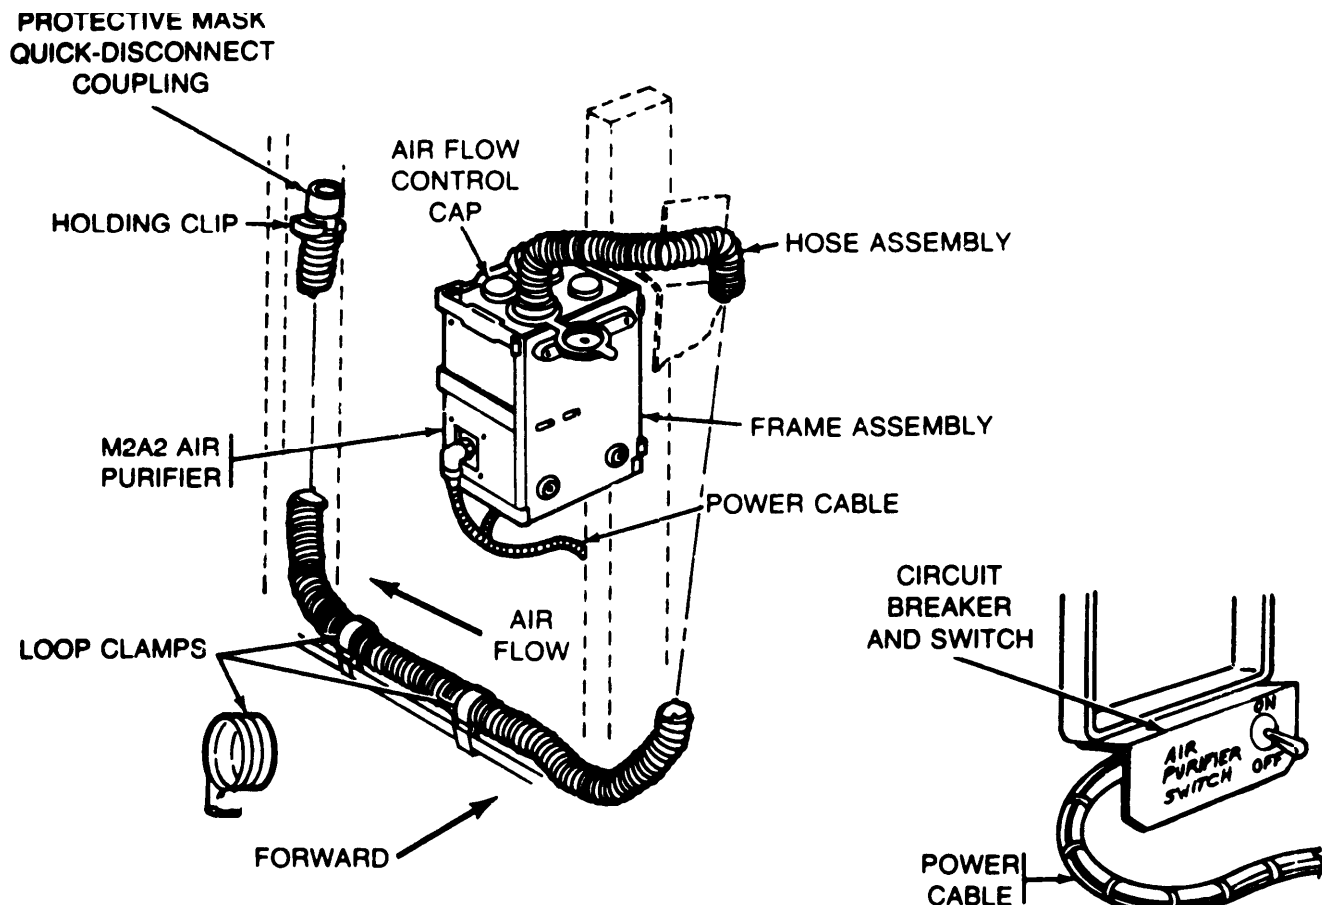

Type Classification:

M8A3: STD (LCC-A); CCTC 393261

M8A2: STD (LCC-B); CGTC 393261

Use:

To remove toxic chemical and biological agents from contaminated air and supply purified air through the M25 or M25A1 tank masks of the crew members of armored vehicles.

Description:

The M8A3 12 CFM tank gas-particulate filter unit consists of an M2A2 air purifier, a circuit breaker and switch, four air hose assemblies with quick-disconnect couplings a frame assembly and a spring clip for the air purifier, a power cable, loop clamps and holding clips for the hose, and common hardware.

Difference Between Models:

The M8A2 filter unit uses an M2A1 air purifier and has three quick disconnect sockets for attaching air hose assemblies. The M8A3 filter unit uses an M2A2 air purifier which has four quick-disconnect sockets.

Functioning:

The electric-motor driven, blower fan in the air purifier draws air in and blows it through the precleaner, the M13 particulate filter, and the M12A1 gas-filter inside the purifier housing. The precleaner separates dust and the filters remove contaminants from the air. When the M1 canister coupling on the M10A1 canister of the M25 or M25A1 tank mask is inserted in the quick-disconnect Coupling on the hose assembly, purified air is provided to the mask. The positive pressure also aid breathing and reduces leakage around the edges of the mask facepiece when worn.

Limitations:

The filter unit does not protect against carbon monoxide gas. The filters must be changed in accordance with the criteria in the operator's and organua-tional maintenance manual for the vehicle.

Tabulated Data:

NSN:

M8A34240-00-853-3201
M8A24240-00-691-1505

Line item number.....H50829
Unit of issueEach
Basis of issue,AR 310-34, MTOE/TDA
Air purifier:
Weight20.25 lb
Dimensions 13.00 x 7.50 x 6.00 in.

Performance:

Electrical characteristics (air purifier):
Vac (60 Hz)27.5 Volts
Vdc.....24 Volts
Current3 amperes
Airflow capacity.....12 cfm


Shipping and Storage Data:

Type pack1 per fiberboard box
Weight53 lb
Cube.....2cu ft
Type storage. Warehouse
Drawing number:
M8A35-19-1779
M8A25-19-1502

References:

TM 3-4240-276-30&P
TM 3-4240-282-L
TM 750-155

PURIFIER, AIR: M2A1 , M2A2 AND PRECLEANED AND PARTICULATE FILTER ASSEMBLY: M1A1-19

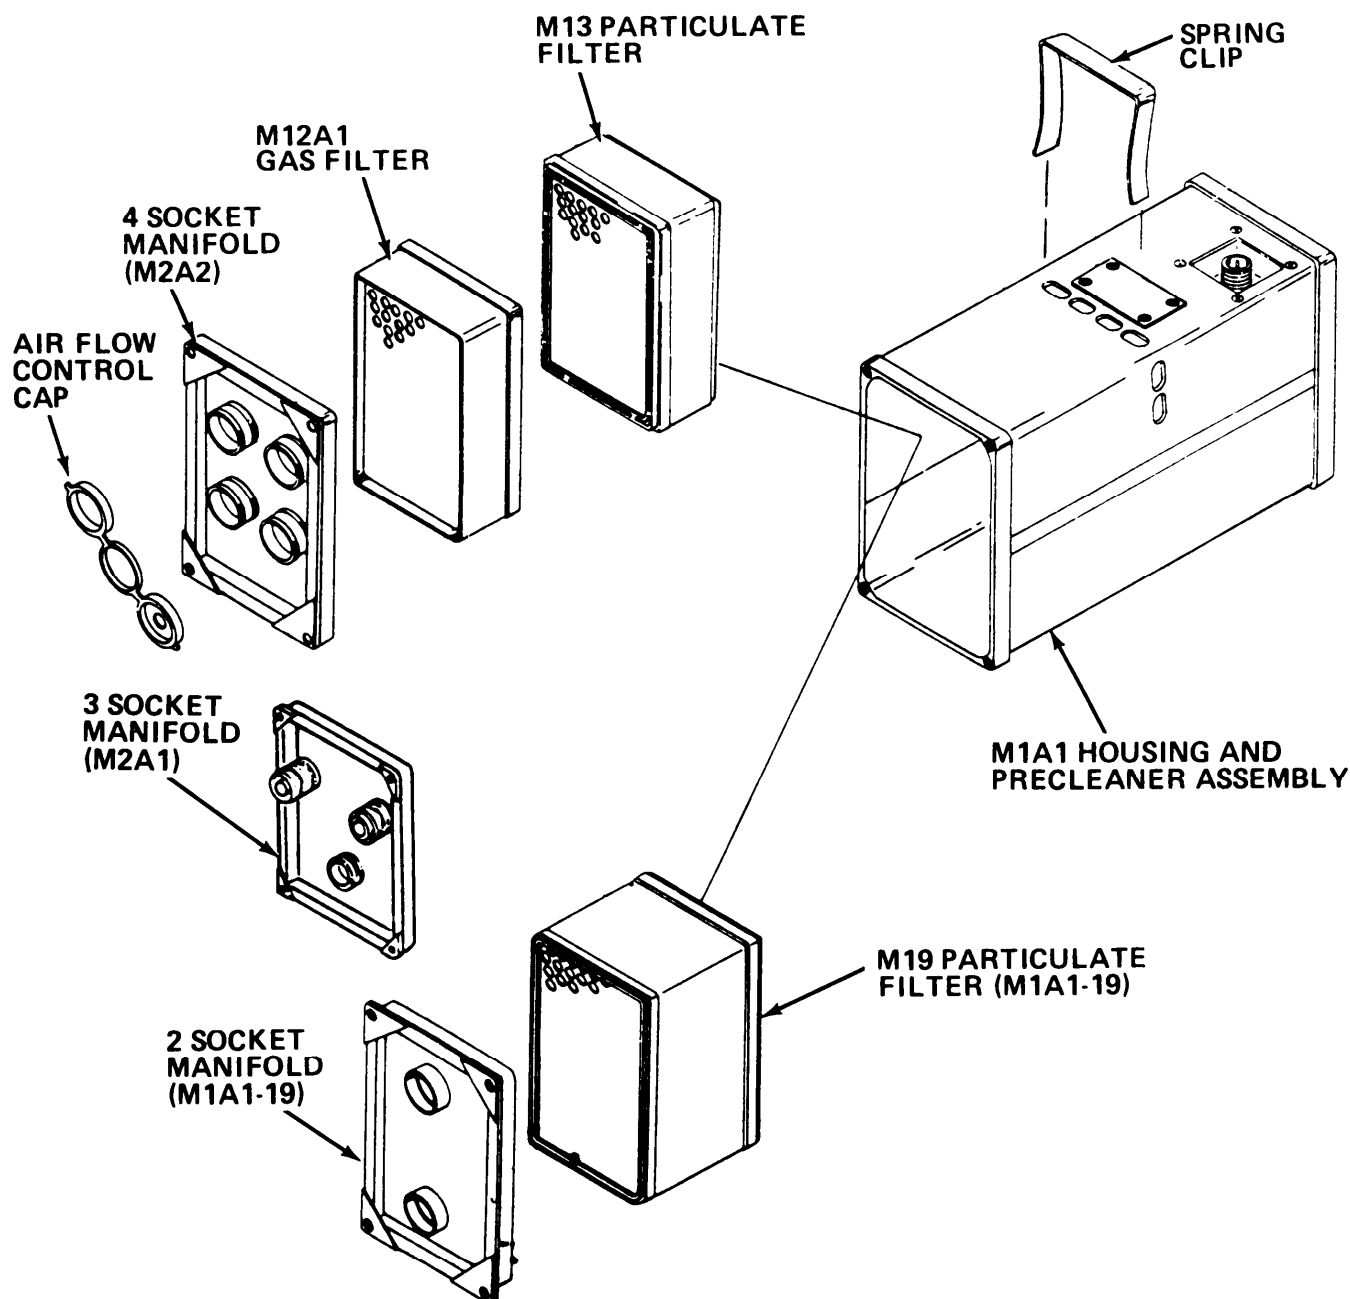

Type Classification:

Not separately type classified
 Component of various other systems.

Use:

Removes toxic chemical and biological agents from contaminated air and supplies purified air as part of gas-particulate filter unit systems.

Description:

The M2A1 and M2A2 deliver up to 12 cfm and consist of a manifold assembly with airflow control caps, gas filter, particulate filter, housing and pre-cleaner assembly, and a spring clip. The M1A1-19 delivers up to 20 cfm and consists of a manifold assembly, particulate filter, housing and pre-cleaned assembly, and a spring clip.

Functioning:

The electric-motor-driven blower fan in the pre-cleaner housing draws air in and blows it through the filters inside the purifier housing. The purifier separates dust and the filters remove contaminants from the air. Purified air is provided at positive pressure through the manifold which connects to hoses for distribution to the collective protection system. Airflow control caps are used for capping the manifold quick-disconnect sockets when not used.

Limitations:

The filter unit does not protect against carbon monoxide gas.

Tabulated Data:

NSN

M2A1 4240-00-307-7805
M2A2 4240-00-868-7906
M1A1-19 4240-01-026-3112

Line item number N/A

Unit of issue Each

Basis of issue TOE/MTOE

Weight:

M2A1/M2A2 20.25 lb

M1A1-19 15.75 lb

Dimensions 13.0 X 7.5 X 6.0 in.

Performance:

Electrical Characteristics:

AC Voltage 27.5 Vat, 60 Hz

Dc Voltage 24 Vdc

Current 3 A

Airflow:

M2A1/M2A2 12 cfm

M1A1-19 20 cfm

Difference Between Models:

The M2A1 and M2A2 deliver air at 12 cfm; M1A1-19 delivers 20 cfm. The M2A1 manifold has three quick-disconnect sockets for attaching hose assemblies; M2A2 has four hose sockets; M1A1-19 has two sockets. The M2A1 and M2A2 contain M13 particulate filter and M12A1 gas filter. The M1A1-19 contains an M1 9 particulate filter and does not have a separate gas filter,

Shipping and Storage Data:

M2A1

Weight 23.4 lb

Dimension 9.0 x 7.1 x 14.9 in.

Cube 0.551 cu ft

M2A2

Weight 19.4 lb

Dimensions 14.8 x 7.6 x 9.2 in.

Cube 0.597 cu ft

Specification MIL-STD-2073

Drawing Number P5-19-1772

M1A1-19

Weight 18.0 lb

Dimensions 14.8 x 7.8 x 9.2 in.

cube 0.616 cu ft


Specification MIL - STD - 2 0 7 3

Drawing Number P5-19-2353

References:

TM 3-4240-276-30&P

SAFETY EQUIPMENT SET, RESPIRATORY: TWO-MAN, GASOLINE TANK CLEANING

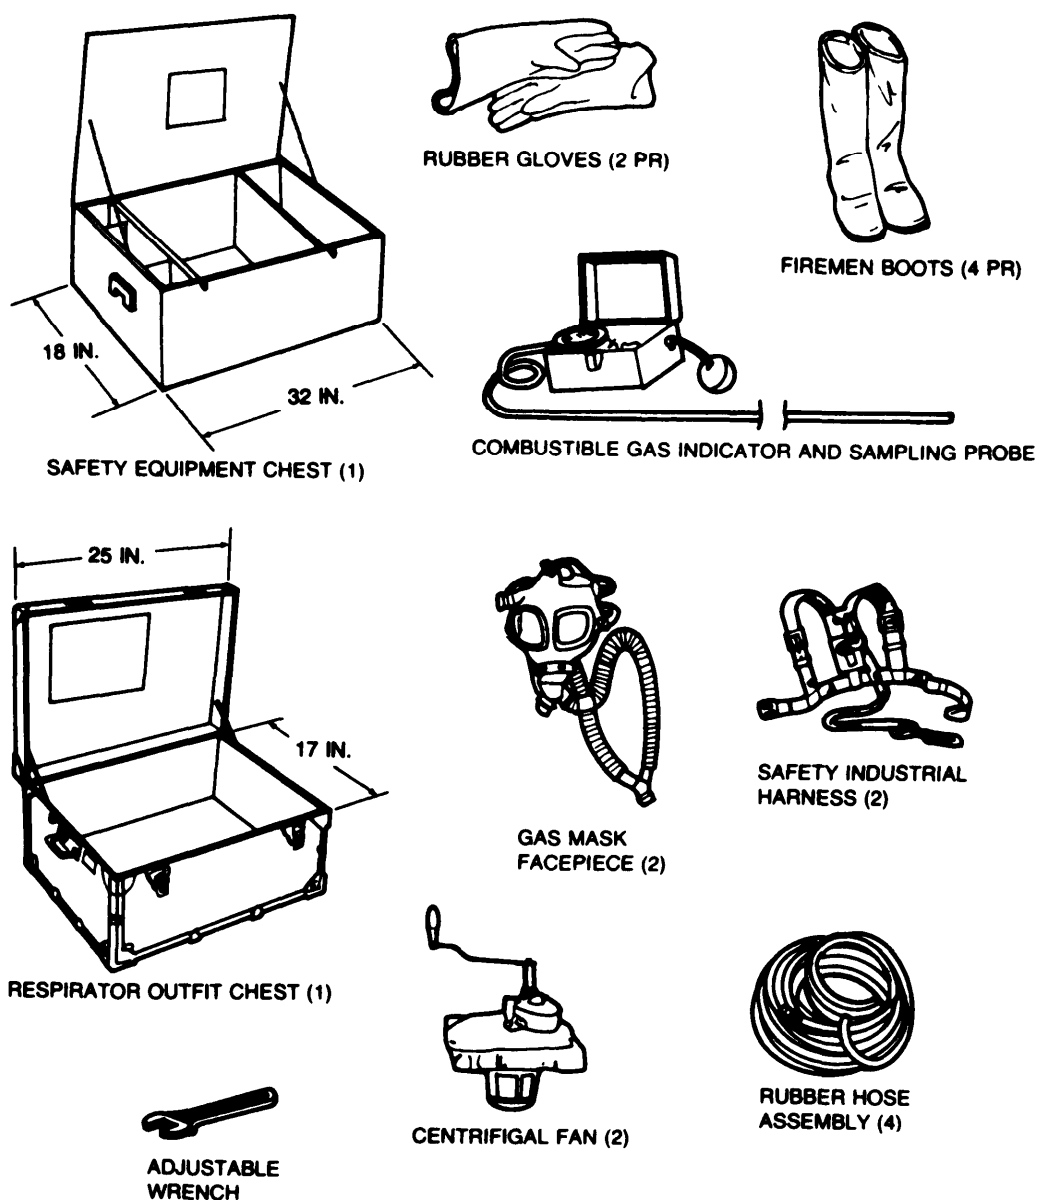*Type Classification:*

STD (LCC-A); CCTC 355559

Use:

To provide protection and breathable air to teams cleaning internal portions of rail, truck, or ground mounted petroleum distribution or storage tanks.

Description:

a. The two-man respiratory safety equipment set for cleaning gasoline tanks consists of safety equipment and a respirator outfit.

b. The safety equipment includes two pairs of size 8 firemen boots, two pairs of size 10 firemen boots, four pairs of size 11 rubber gloves, a portable combustible gas indicator, a gas-indicator sampling probe, two industrial-safety harnesses; four rubber hose assemblies; and an adjustable wrench. A wood foot-locker serves as a storage chest for these components.

c. The respirator outfit consists of a respirator outfit chest, two gas mask facepieces, and a centrifugal-fan assembly.

Functioning:

- a. The centrifugal fan is used to pump fresh air through the rubber hose assemblies to the gas mask facepieces being worn by the two-man team. This also creates positive pressure in the facepiece, further reducing leakage of fumes into the mask.
- b. The portable combustible gas indicator is used to determine the explosibility of gas vapors in the tank before the team enters it. Squeezing and releasing an aspirator bulb on the Indicator, draws air samples through sampling lines connected to the probe. Readings from 0 to 100 pct of lower limit of explosibility are taken from the scale on the indicator.

Tabulated Data;

NSN4240-510-0204
Line item number S29227
Unit of issue Each
Basis of issue AR 310-34; TOE/MTDA


Shipping and Storage Data:

Type packOne set packed shipped
In two separate chests
WeightO 400 lb
Cube 19.5 Cu ft
Type storage Warehouse
Specification number MIL-S-51416 and
MIL-R-17729

References:

SC 4240-95-CL-E01

SHELTER SYSTEM, COLLECTIVE PROTECTION, CHEMICAL-BIOLOGICAL: INFLATABLE, TRAILOR-TRANSPORTED, M51

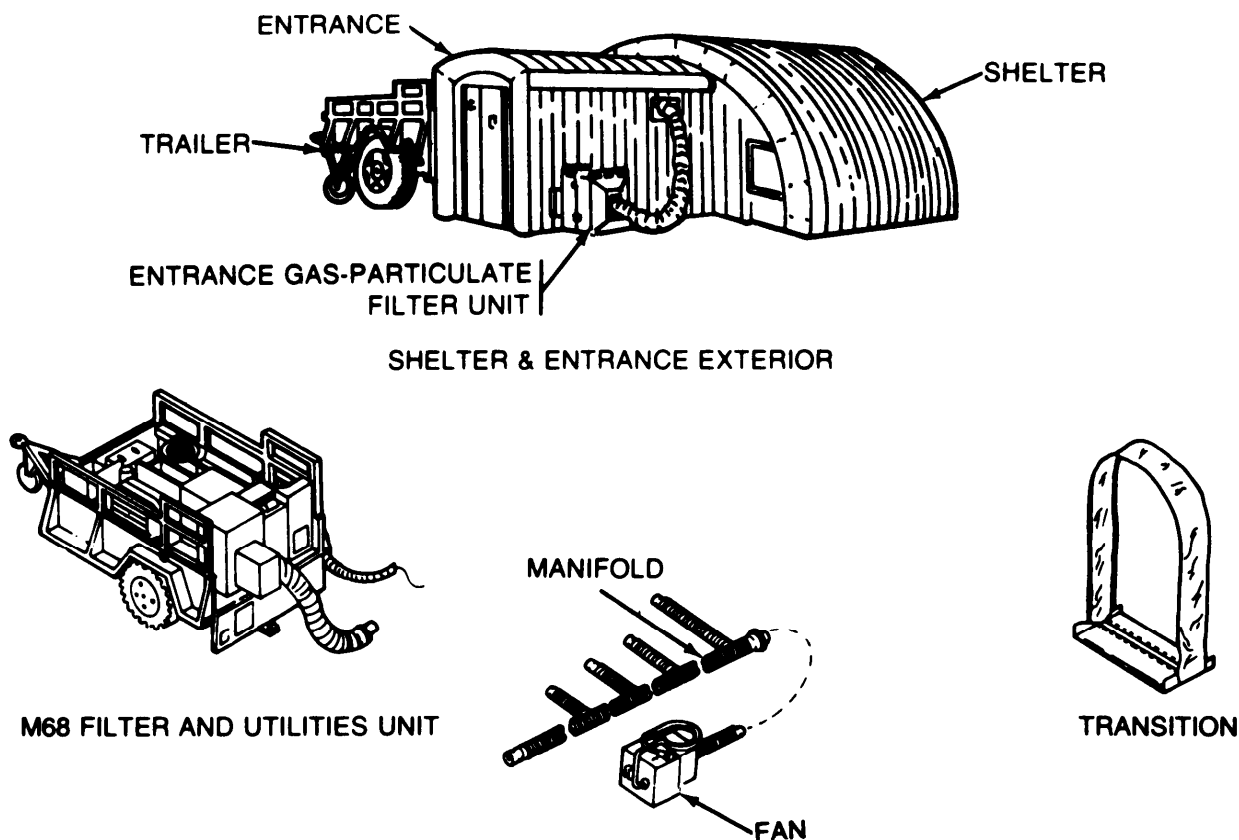

Type Classification:

STD(LCC-A); AMCTC 869971

Use:

to serve as a field shelter for collective protection of personnel against chemical and biological agents. Its main users are medical platoons of units operating forward of the division rear boundary, division medical clearing platoons, and nondivision medical learning companies.

Description:

The M51 shelter system is a transportable, pressurized enclosure consisting of an inflatable shelter, an inflatable protective entrance, the M68 filter and utilities unit, and an accessory package. Accessories include a transition and an evacuation fan and manifold. When inflated and pressurized, the shelter is capable of protecting up to 10 occupants. The entrance provides

enough space for two stretcher patients and four stretcher bearers. An electric arctic blanket is issued to units operating in extremely cold weather.

Functioning:

- a. The shelter serves as a toxic-free, pressurized personnel compartment. The shelter is maintained at a higher pressure than the protective entrance to prevent contaminated air from leaking into the shelter.
- b. The protective entrance serves as a pressurized change area between the shelter and the outside contaminated zone. Air pressure in the entrance is maintained lower than in the shelter but higher than the outside air to prevent contaminated air from leaking into the shelter.
- c. The M68 filter and utilities unit provides power, filtration, pressurization, inflation, and environmental control for system operation.
- d. The entrance gas-particulate filter unit purges contaminants from the entrance and pressurizes it.

e. The evacuation fan and manifold are used to deflate or inflate the system.

f. The transition is used as a passage way connecting two shelters.

g. The arctic blanket is used to heat the shelter material prior to erecting and during striking operations in temperatures below -25 degrees Fahrenheit.

Limitations:

The gas and particulate filters do not protect against carbon monoxide.

Tabulated Data:

NSN	4240-00-854-4144
Line item number	T00474
Unit of issue	Each
Basis of issue	AR 310-34; MTOE/TDA
Complete system on the trailer:	
Height	8 ft
Length	14 ft
Width	7 ft
Weight	5,405 lbs
Shelter and entrance assembled (exterior):	
Height	9 ft
Length	27 ft
Width	18 ft
Shelter inflated:	Interior Exterior
Height	8 ft 9 ft
Length	14 ft 16 ft
Width.....	15 ft 18 ft
Entrance inflated:	Interior Exterior
Height	7 ft 8 ft
Length	11 ft 11 ft
Width.....	4 ft 6 ft

Performance:

Input voltage 206 Vac.3-phase.60 Hz
Output voltage 110 Vac, 24Vdc, and 12 Vdc
Cooling 42,000 Btu per hour dry coil
 at 150°F ambientand 90°F
 return air

Heating:

High heat	60,000 Btu per hour
Low heat	30,000 Btu per hour
Air circulation	1.050 standard cubic feet per minute

Shipping and Storage Data:

Type pack 1 on an M105A2 1 1/2 ton
trailer with plywood cap
Dimensions 14 x 7x8.13 ft
Weight 5,705 lb.
cube 797 cuft
Type storage Shed
Drawing number DL5-19-6523



References:

TM 3-221
TM 3-4240-264-12
TM 3-4240-264-20P
TM 3-4240-264-34
TM 3-4240-264-34P

CHAPTER 4

DECONTAMINATION AND IMPREGNATION

	Page
Chemical Agent Monitor System (CAM)	4-16.1
Decontaminating Agent: DS2	4-3
Decontaminating and Reimpregnating Kit: Individual, ABC-M13	4-5
Decontaminating Apparatus, Portable: DS2, 1 1/2-Quart, ABC-M11	4-7
Decontaminating Apparatus: Portable, 14 Liter, M13	4-8.1
Decontaminating Apparatus, Power-Driven, Skid-Mounted: Multipurpose, Nonintegral, 500-Gallon, ABC-M12A1	4-9
Decontaminating Apparatus: Power Driven, Lightweight, M17	4-8.5
Decontaminating Kit, Skin: M258A1	4-11
Decontaminating Kit, Skin: M291	4-12.1
Decontaminating Apparatus: Power-Driven, Portable Type A/E32U-8	4-8.3
Decontaminating Kit, Individual Equipment: M280	4-10.1
Impregnating Set, Clothing: Field, M3	4-13
Testing Kit, Impregnate-in-Clothing: ABC-M2	4-15
Vesicant Agent Protective Ointment: M5 (Deleted)	4-17

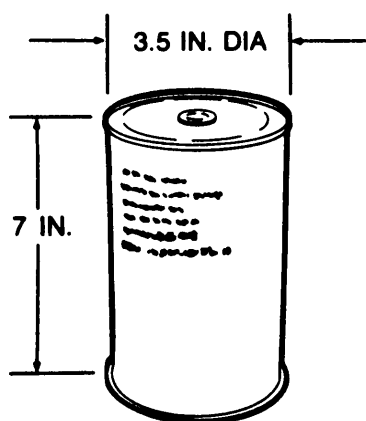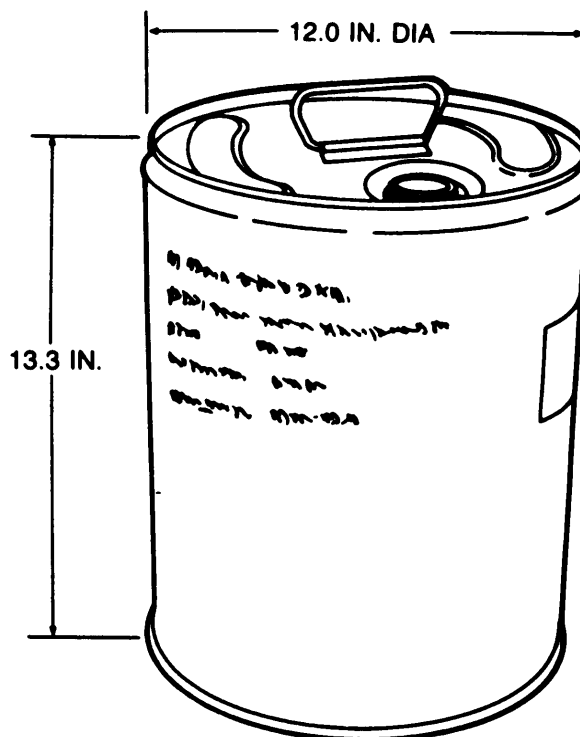DECONTAMINATING AGENT: DS2**DS2 IN A 1 1/3-QUART CAN****DS2 IN A 5-GALLON PAIL***Type Classification:*

Expendable; AMCTC 9512 72

Use:

To decontaminate equipment that has been contaminated with liquid blister or nerve agents and biological agents (except bacterial spores).

Description:

DS2 decontaminating agent is a clear, amber colored solution consisting of 70 percent active agent (diethylenetriamine), 28 percent solvent (ethylene glycol- monomethyl ether), and 2 percent active agent booster (sodium hydroxide). The 5-gallon cans provide bulk DS2 for large scale decontamination operations. The 1 1/3quart cans provide one DS2 charge for the M11 1/2quart portable decontaminating apparatus.

Functioning:

DS2 decontaminates by chemical reaction with chemical agents. One application of DS2 reacts with GB and HD to effectively reduce their hazards within five minutes. Within 30 minutes contact time, DS2 will neutralize all known toxic chemical agents.

Limitations:

- Protective mask and gloves must be worn when using DS2.
- DS2 is flammable and has a very low flash point. It may start a fire when it comes in contact with other raw decontaminating agents such as STB.
- DS2 corrodes aluminum, cadmium, tin, and zinc with prolonged contact. It softens leather. It may soften, remove, or discolor paint.

*Tabulated Data:**NSN:*

1 1/3-quart can6850-00-753-4027
5-gallon pail6850-00-753-4870
Unit of issueCan or pail
Basis of issueCTA 50-970

Performance:

By chemical reaction, DS2 neutralizes all known chemical agents within 30 minutes.

Shipping and Storage Data:

Shelf lifeStable as long as
hermetically sealed
container remains
sealed. After
container is opened,
DS2 must be used
promptly as it
absorbs moisture
making it defective.

Can:

Type of pack 12 cans per box
weight 37.2 lb
Cube 1.4 cu ft


Pail:

Type of pack1 pail per box
Weight 45 lb
Cube 1.1 cu ft
DOT hazard classification Corrosive material
DOT shipping name Corrosive liquid. NOS
Specification number MIL-D-50030

References:

FM 3-20
FM 3-21
TM 3-220
TM 3-4230-204-12

DECONTAMINATING AND REIMPREGNATING KIT: INDIVIDUAL, ABC-M13

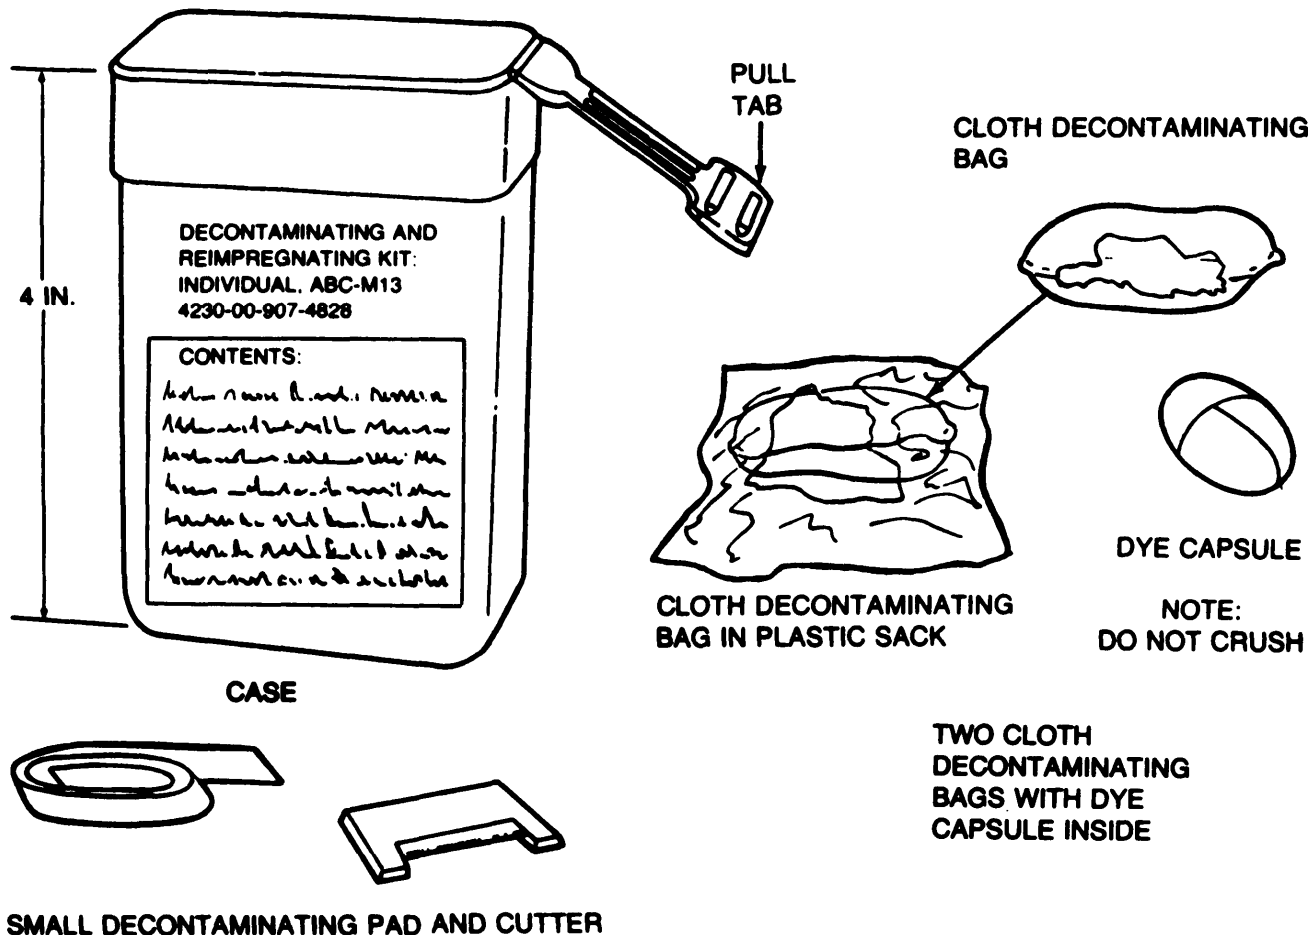

Type Classification:

Expendable AMCTC 3398 65

Use:

To decontaminate the protective mask interior, individual clothing, and equipment that have been contaminated by liquid chemical agents. The kit is also used to reimpregnate the permeable protective liner outfit in an emergency.

Description:

The ABC-M13 individual decontaminating and reimpregnating kit consists of a plastic bag containing two cloth bags each filled with chloramide (XXCC3) decontaminating and reimpregnation powder and a capsule containing a dye, a plastic bag containing a small decontaminating pad filled with Fuller's earth, and a cutter.

Functioning:

- The chloramide powder reacts with and neutralizes vapors and small droplets of nerve and blister agents.
- The small decontaminating pad fits over gloved fingers and is used to blot visible liquid agents from the mask interior and contaminated materials. The Fuller's earth absorb small droplets of the chemical agents.

Limitations:

- The decontaminating and reimpregnating powder is very irritating to the eyes and is poisonous.
- Do not store in places where temperatures may exceed 120°F.
- Laboratory tests indicate the dye may cause cancer. Do not crush the dye capsule. If a dye capsule is found to be crushed, dispose of the kit.

Tabulated Data:

NSN 4230-00-907-4828
Unit of issue Each
Basis of issue CTA 50-970
Weight 0.7 lb
Dimensions 4 x 3 x 2 in.

Performance:

The decontaminating and reimpregnating powder neutralizes most nerve and blister agents.

Shipping and Storage Data:


Type pack 100 per vapor-barrier
taped fiberboard box

Weight 0.70 lb
cube 2.25 cu ft
Type storage Warehouse
Drawing number 5-77-763

References:

- FM 3-21
- FM 21-40
- FM 21-41
- TM 3-220
- TM 3-4230-211-10
- TM 10-277

DECONTAMINATING APPARATUS, PORTABLE: DS2, 1 1/2-QUART, ABC-M11

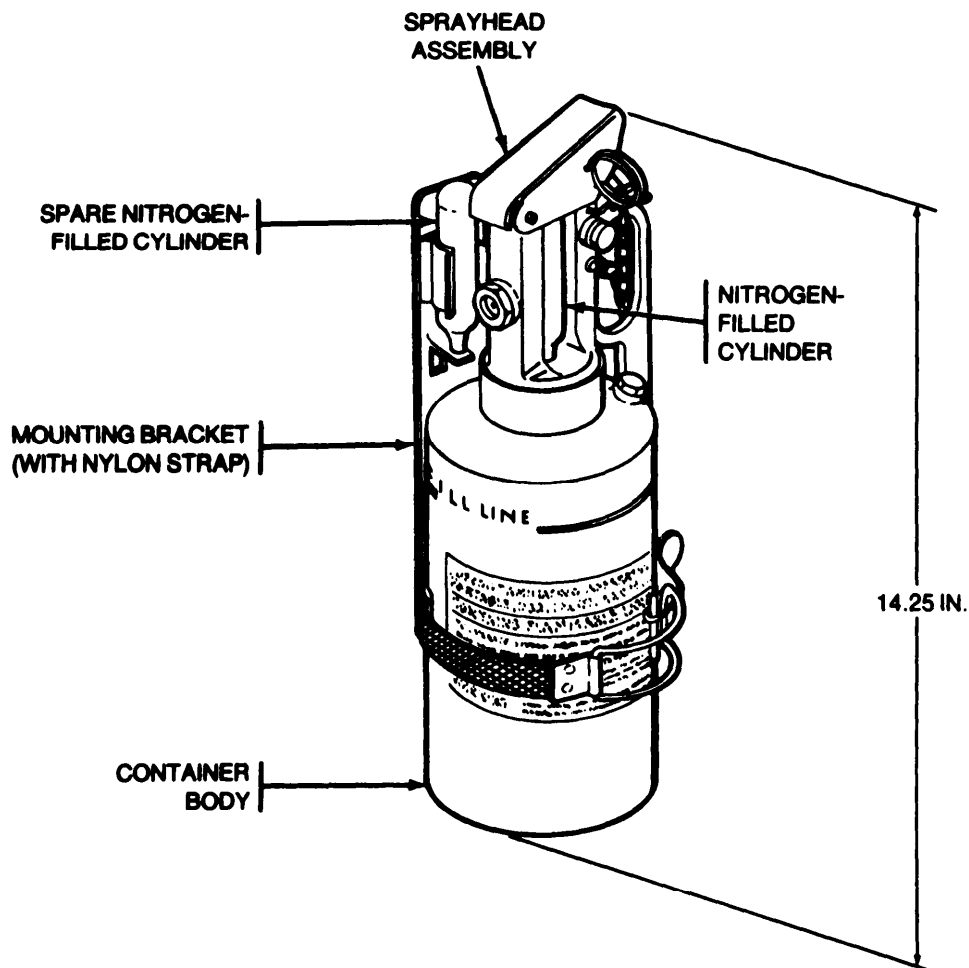*Type Classification*

STD (LCC-A); CCTC 3801 61

Use:

To spray DS2 decontaminating agent to decontaminate vehicles or crew-served weapons to the minimum extent necessary to make them safe and allow their continued operation.

Description:

The ABC-M11, 1 1/2quart, DS2 portable decontaminating apparatus consists of a refillable cylindrical container with a spray head assembly screwed to the top and a vehicle mounting bracket. The container body holds about 1 1/3-quarts of DS2 decontaminating solution. Each M11 apparatus has two nitrogen-filled pres-

sure cylinders. One is set in place in the spray head assembly, and the other is emplaced on the mounting bracket.

Functioning:

Apparatus is handheld by handle on sprayhead. Pulling captive safety pin on sprayhead breaks antipilferage seal Wire and releases handle. Raising hands punctures pressurized nitrogen-filled cylinder. Pressure from nitrogen pressurizes DS2 in container. Pressing thumb lever allows pressure to force DS2 solution up syphon tube and out nozzle of sprayhead to form decontaminating spray. Decontamination is accomplished by spraying the DS2 on the contaminated equipment.

Tabulated Data:

NSN4230-00-720-1618
 Line item number F81469
 Basis of issue CTA 50-909
 Capacity 1 1/3quarts
 Filling DS2 solution
 Weight of empty apparatus 3.0 lb
 Weight of filling (1 1/3
 quarts of DS2 solution)2.9 lb
 Weight of filled apparatus 6 lb
 Cylinder, nitrogen-filled CTA 50-970
 Decontaminating agent DS2 CTA 50-970

Performance:

Effective spray range6 to 8 feet
 Coverage per filling 15 square meters

Shipping and Storage Data:


Type pack12 per box
 Weight61 lb
 Cube2.7 cu ft
 Type storageWarehouse
 Cylinder, nitrogen-filled:
 DOT hazard
 classification Nonflammable gas
 DOT shipping nameCompressed gas. NOS
 Drawing number 5-51-269

References:

TM 3-220
 TM 3-4230-204-12&P



DECONTAMINATING APPARATUS: PORTABLE, 14 LITER, M13

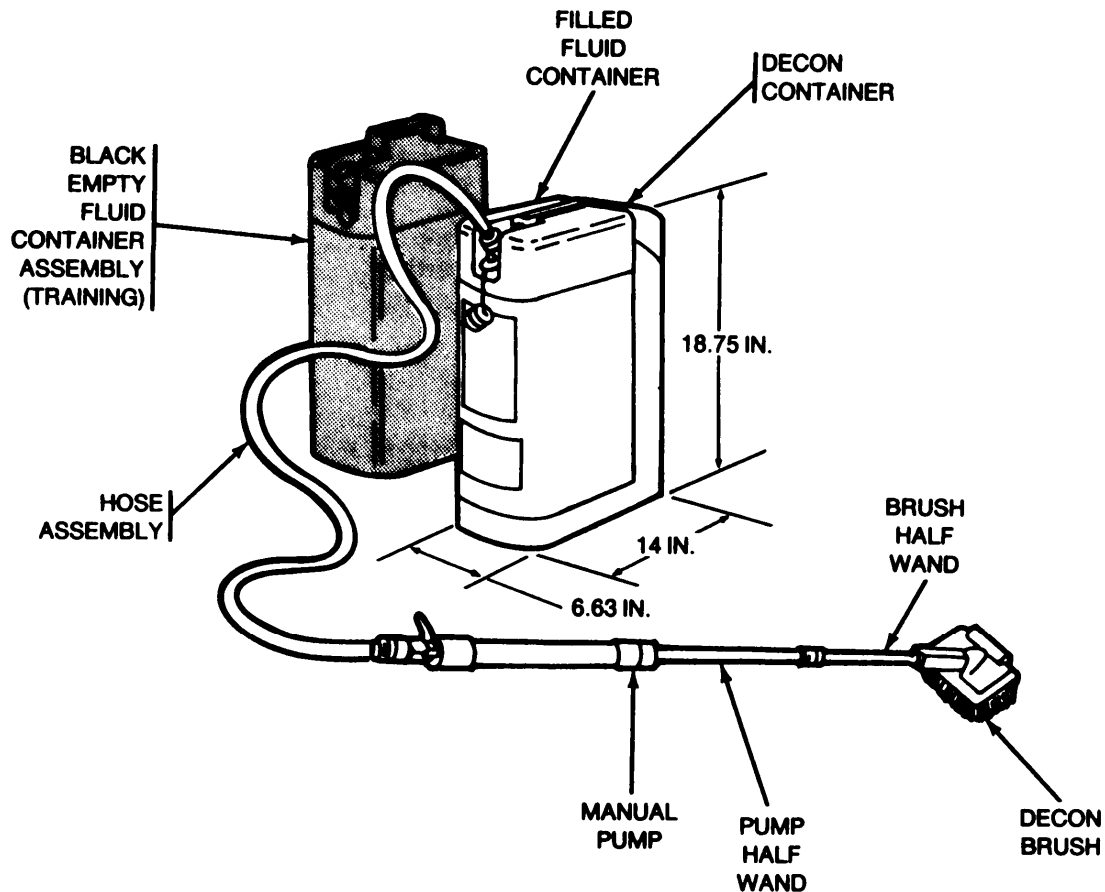*Type Classification:*

STD (LCC-A); MSR 09836002

To spray DS2 decontaminating agent onto surfaces of vehicles and equipment to reduce the level of toxic Chemical agent contamination.

Description:

The M13 portable decontaminating apparatus consists of a decontaminating (DECON) brush, a brush half wand, a pump half wand, a manual pump, a nonmetallic hose assembly, a filled fluid container (painted green), and a decontaminating container. An empty fluid container assembly (painted black) is issued separately for training with water instead of DS2.

Functioning:

The brush is used for scrubbing on the DS2 and removing mud or soil from the equipment. The brush half wand is used to attach the brush and extend the reach for scrubbing. The pump half wand is attached to the pump and extends the reach for scrubbing also. The pump is manually operated to deliver DS2 spray out the brush end to the surface being decontaminated. The hose feeds the DS2 from the fluid container to the pump. The fluid container holds the DS2 and is filled only at the factory. The decontaminating container stores all parts/accessories during transport and storage.

Limitations:

The filled fluid container holds DS2 decontaminating agent which is a hazardous chemical requiring special protective clothing and equipment and handling precautions. DS2 is corrosive and combustible.

Tabulated Data

NSN4230-01-133-4124
Line item numberD81537
unit of issue Each
Basis of issue CTA 50-909
Capacity. 14 liters
(3.7 gallons)
Filling .. DS2 solution
Weight:
Empty 24 lb
Filled with 14 liters of DS2 54 lb
Dimensions(unpackage, but not assembled);
Length.. 14.00 in.
WEIGHT 6.63 in.
.Height 18.75 in.
Fluid container assembly (empty, painted black for
trainer use only)
NSN4230-01-136-8889
Basis of issue CTA 50-970

Performance:

Coverable 1200 sq ft at 75°F
Usable temperature range:.
Low. - 25° F
High 120° F


Shipping and storage Data

Type peck153/8 x 73/8 x 20in.ID
weight 64 lb
Cube. 1.5 cu ft
Type storage Warehouse
Drawing number. 5-51-582

References:

TM 3-220
TM 3-250
TM 3-4230-214-12&P

DECONTAMINATING APPARATUS: POWER DRIVEN, PORTABLE, TYPE A/E32U-8

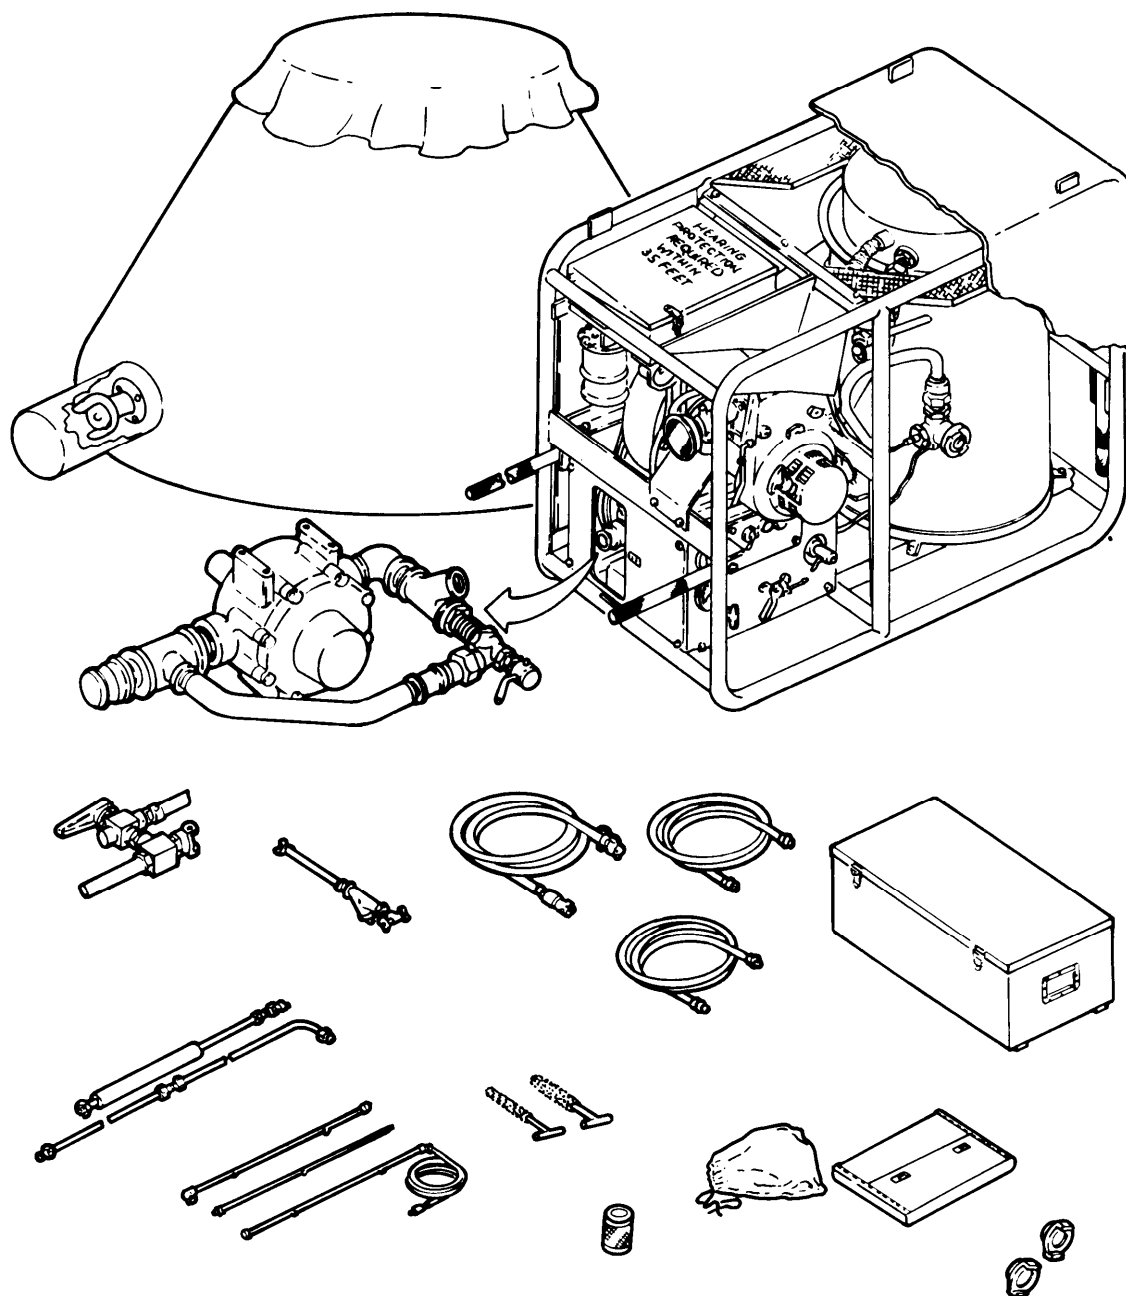

Type Classification:

LP (LCC-U): MSR 06846006

Use:

The equipment is used to decontaminate equipment, personnel, and other material exposed to nuclear, biological, or chemical contaminants. It is used with water and also water mixed with decontaminating agents.

Description:

The portable power-driven decontaminating apparatus type A/E32U-8 consists of an air-cooled 2 cycle gasoline engine, heat exchanger, and water pump. Also, a collapsible water tank that will hold up to 1580 gallons (6000 liters) of water, with a cover, is supplied. The accessories normally stored in the storage accessory case provide suction hoses, pressure hoses, shower bars, branch hoses, strainers, brushes, and various equipment needed.

Functioning:

The decontaminating apparatus has five major systems: the engine, the air system, the water system, the heater system, and the electronic control system.

When operated with the water tank filled and various accessories used, the water can be heated and pumped through the hoses to areas to be decontaminated.

Tabulated Data:

NSN4230-01-153-8660
 Line item number D82404
 Unit of issueEach
 Basis of issue TOE/MTOE/TDA

Decontaminating Apparatus:

Weight360 lbs(163 kg)
 Length40.2 in. (102cm)
 Width 23.2 in. (59 cm)
 Height33.9in. (86cm)

Heater:

Type Convection, high pressure fuel fired,
 sparkplug ignition

Heat output 700,000 BTU(180,000
 kilocalories) perhour

Primary fuel Leaded or unleaded regular
 gasoline

Alternate fuel Diesel (DF2), jet fuel (JP4),
 or kerosene

Fuel consumption Less than 9 gal(34liter)
 per hour

Fuel pump Belt driven. gear type

Engine:

Type Single cylinder, two cycle

Displacement..... 77.6 in.³(197cc)

Compression ratio7.5 to1

Output power 7.3 hp at 4250 rpm

Cooling Air-cooled

Fuel required Leaded or unleaded regular
 gasoline (5gal of fuel mixed with 1qt of
 two-cycle motor oil)

Normal engine speed 4250 ±50 rpm

Fuel consumption 0.7 gal (2.7 liter) per hour

Starter type Manual recoil

Ignition system Resistive-discharge with
 breaker points

Electrical generator Flywheel mounted,
 provides 6V ac

Power transfer..... Centrifugal clutch with
 engagement at 2700 rpm

Water pump (water inlet):

Type Belt driven, self-priming, high pressure,
 overcapacity roller

Centrifugal Fan Assembly:

Type Shrouded. axial vane

Storage Accessory Case:

Weight (loaded) 165 lbs(65kg)

Length 41.8 in. (106cm)

Width 20.5in. (52cm)

Height 15.4in. (39cm)

Water Tank:

Type Self-erecting, rubberized nylon

Weight (empty) 70 lbs(32kg)


Height (full) 5.8 ft (1.7m)

Capacity 1580 gal (6000liters)

Reference:

TM3-4230-218-12&P

DECONTAMINATING APPARATUS: POWER-DRIVEN, LIGHTWEIGHT, M17

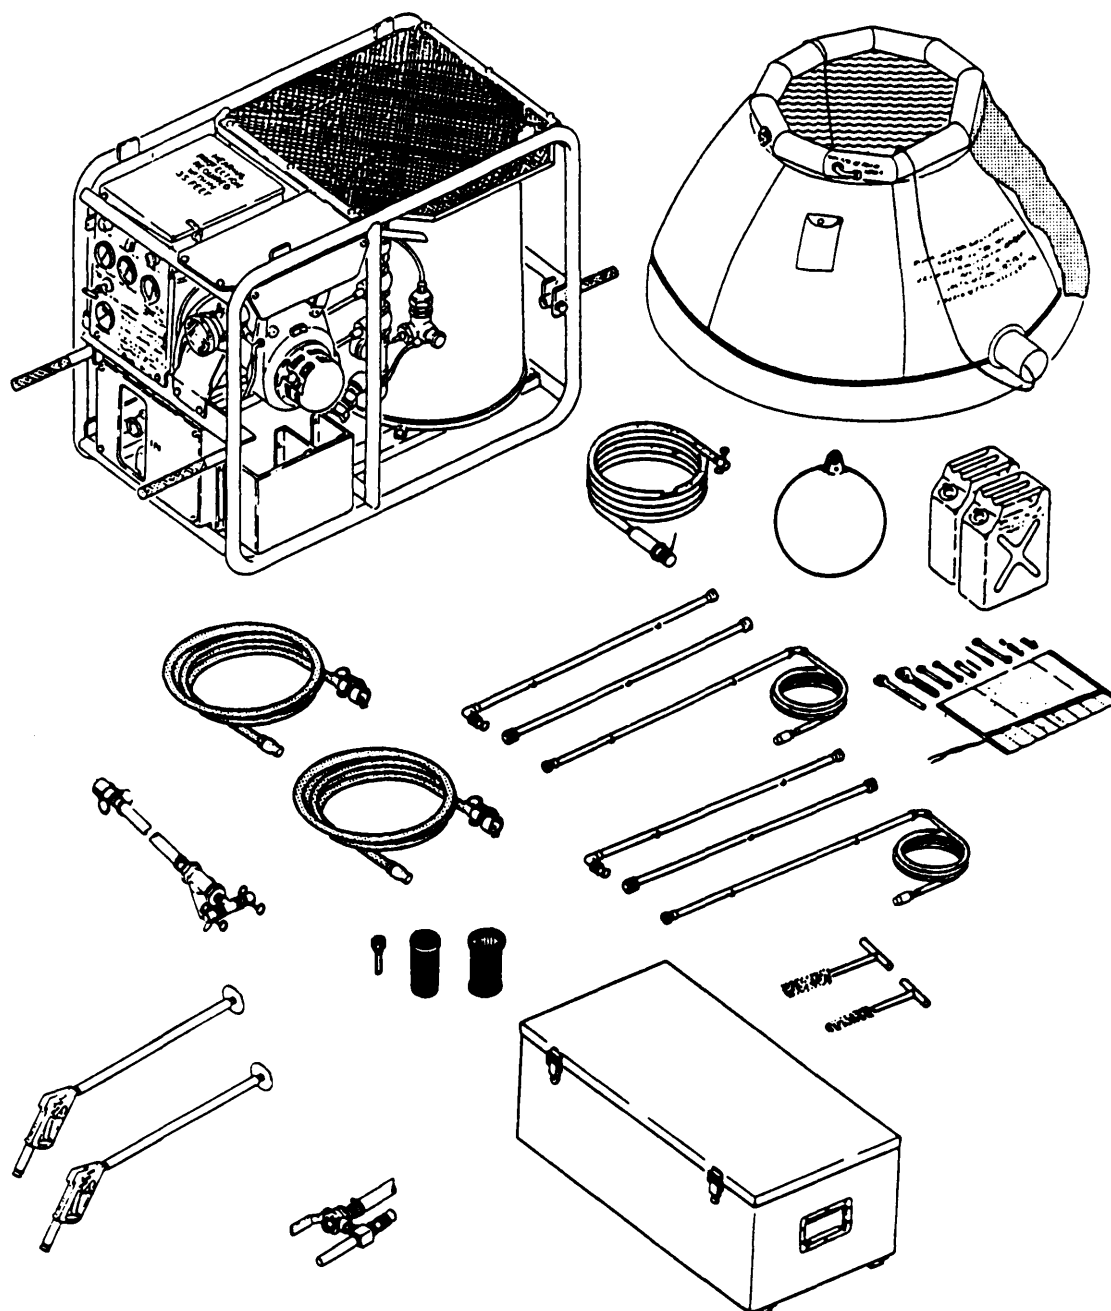

Type Classification:

STD (LCC-A); MSR 08876013

Use:

The equipment is used to decontaminate equipment, personnel, and other material exposed to nuclear, chemical, or biological contaminants. It is used with water and also with water mixed with decontaminating agents.

Description:

The lightweight portable power-driven decontamination apparatus consists of an air-cooled 2-cycle gasoline powered engine, heat exchanger, and water pump. A collapsible water tank (1580 gallon capacity) with cover is supplied. Accessories, normally stored in the accessory box, include suction hose, pressure hoses, spray wands, decontaminant injector, shower bars, branch hose, fitter, strainer, suction hose float, and cleaning brushes.

Functioning:

The decontaminating system has five major systems: engine, air, water, heater, and electronic control. When operated with the filled water tank or from natural water source, water can be heated and pumped through hoses to areas to be decontaminated. Spray wands and shower bars deliver heated water or a mixture of water and decontaminating agent using the injector accessory.

Tabulated Data:

NSN4230-01-251-8702

Line item number.....D82404

Unit of issueEach

Basis of issueTOE/MTOE/TDA

Weight:

Decon apparatus..... 360 lb

Accessory Kit143 lb

Water tank70 lb

Dimensions:

Decon apparatus 40.2 x 23.2 x 33.9 in.

Accessory kit 41.8 x 20.5 x 15.4 in.

Water tank68 in. high (full, 1580 gal)

*Performance:**Heater*

Type Convection, jet-fired,
igniter plug ignition

Heat output700,000 Btu (180,000
Kilocalories per hour)

Primary fuel Leaded or unleaded
regular gasoline

Alternate fuel Diesel (DF2), Jet
Fuel (JP4), or kerosene

Fuel consumption Approximately 9 gal
(34 l) per hour

Igniter Single electrode, spark
producing element

Fuel pumpBelt driven, gear type

Engine:

TypeSingle cylinder, two cycle

Displacement 77.6 in (197 cc)

Compression ratio 7.5 to 1

Output power.....7.3 hp at 4250 rpm

CoolingAir cooled

Fuel required.....Gasoline and oil
(5 gal of gasoline mixed
with 1 qt of two-cycle oil)

Lubrication2-cycle oil mixed with fuel

Normal engine ram 4250 ± 50 rpm

Fuel consumption., Approximately 0.7
gal (2.7 liter) per hour

Starter type Manual recoil

ignition system Resistive discharge with
breaker points

Breaker point gap 0.012 to 0.015 in.
(0.30 to 0.40 mm)

Timing. 0.087 to 0.102 in.
(2.2 to 2.6 mm) BTDC

spark plug. Champion RL87Y/RL87YC

Spark plug gap 0.020 to 0.035 in.
(0.51 to 0.89 mm)

Electrical generator Flywheel mounted,
providing 6 Vac

Power transfer Centrifugal clutch with
engagement at 2700 rpm

Engine Fuel Can5 gal (18.9 liter)

Heater Fuel Can5 gal (18.9 liter)

Water Pump Belt driven, self-priming,
medium pressure,
over-capacity roller

Fan Assembly Shrouded, axial vane

Suction Hose (1):

Length 33 ft (10 m)

Coupling typecam

Branch Hose (1):

Length3 ft (0.9 m)

Coupling typecam

Capacity 250 psi

Pressure Hose (2):

Length50 ft (15 m)

Coupling type cam

capacity250 psi

Shower (2 sets):

Type.....3-section with 6 jets each

Coupling type cam

Length 8 ft (2.44 m)

Spray Wand (2):

Type.....Single section, trigger actuator

Coupling type cam

Length 3 ft (0.9m)

NozzleAdjustable fan stream

Injector

Type. 80/20 Siphon (80 water,
20 decontaminant or, 4 to 1

Coupling type Cam

Shipping and Storage Data


see TM 3-4230-228-23&P

References:


TM 3430-228-10

TM 3-4230-228-23&P


**DECONTAMINATING APPARATUS, POWER-DRIVEN, SKID-MOUNTED:
MULTIPURPOSE, NONINTEGRAL, 500-GALLON, ABC-M12A1**

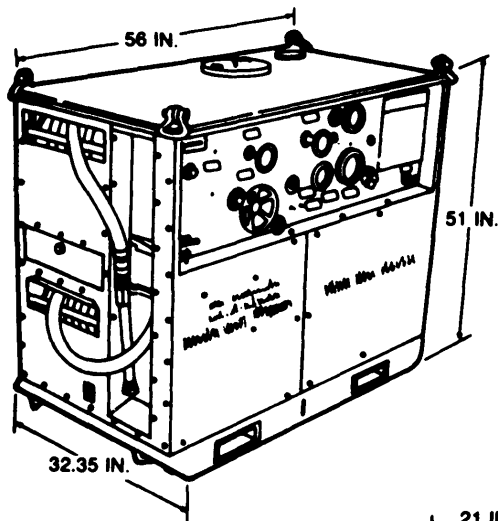

PUMP UNIT ASSEMBLY

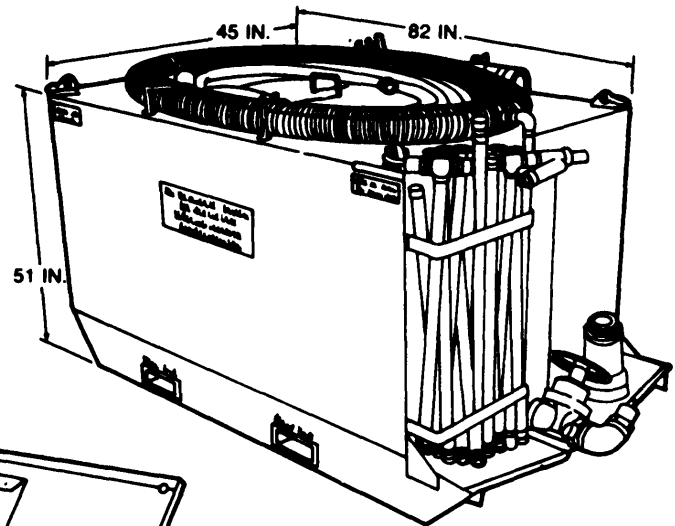

**TANK UNIT ASSEMBLY AND
PERSONNEL SHOWER ASSEMBLY**

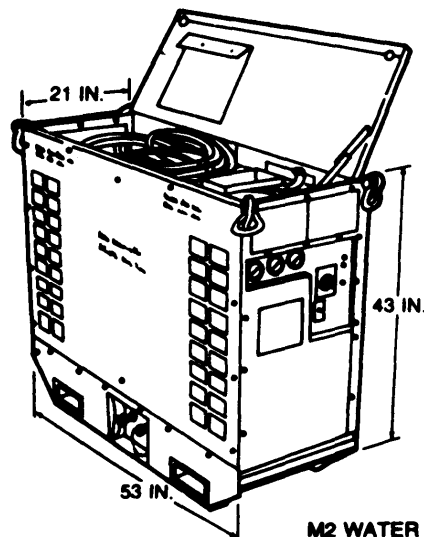

M2 WATER HEATER

Type Classification:

STD(LCGA);AMCTC 4923 66

Use:

To mix and spray decontaminating agent slurries and solutions and hot, soapy water rinses during field decontamination operations. It is also used for fire fighting with water or foam, for deicing operations, washing vehicles, pumping various fluids, and showering Personnel in the field.

Description:

The ABC-M12A1 decontaminating apparatus consists of a pump unit assembly, a tank unit assembly and Personnel shower assembly, and an M2 water heater. Each unit is mounted on skids.

Functioning:

The pump unit assembly prime-detergent tank holds priming water, detergent, or foaming liquids. The pump delivers up to 50 gallons of waterer STB decontaminating agent slurry per minute at a working pressure of about 105 pounds per square inch, using both hoses. The skid-mounted, 500-gallon, stainless-steel tank has a working capacity of 447 gallons of water or 317 gallons of slurry. The hopper-blender assembly and fluid agitation system in the tank are used to blend STB decontaminating agent and water. The shower assembly is used to form a field shower for showering up to 24 persons at one time. The M2 water heater is used with the pump unit and tank unit to provide hot water for decontaminating and for showering troops in the field.

Limitations:

The ABC-M12A1 decontaminating apparatus is not authorized for use with defoliants, herbicides, or insecticides.

Tabulated Data:

NSN 4230-00-926-9488
 Line item number F81880
 Unit of issue Each
 Basis of issue AR 31-34; TOE/MTOE/TDA
 Pump unit:
 Height 51 in.
 Length 58 in.
 Width 82 in.
 Weight 1,120 lb

Tank unit:
 Height 51 in.
 Length 82 in.
 WIDGTH 45 in.
 Weight 996 lb

M2 water heaters:
 Height 43 in.
 Length 53 in.
 Width 21 in.
 Weight 575 lb

Capacities:
 Tank (water only) 447 gallons
 Tank (slurry) 317 gallons

Performance:

Working pressure 60 to 120 lb per square in.

Coverage per filling (average for smooth surface 1,300 square meters

Discharge rate for slurry or water (one spray gun) 25 gallons per minute

Discharge rate for slurry or

water (two spray guns) . . . 50 gallons per minute

Heating water 600 gallons per hour at 100°F

Shipping and Storage Data:

Type pack 3 crates

Pump:

 Weight 1,550 lb

 Cube 93.3 cu ft

Tank:

 Weight 1,460 lb

 Cube 180 cu ft

Heater:

 Weight 725 lb

 Cube 37.2 cu ft

Type storage Warehouse

Drawing number DL 5-45-3284

References:

LO 3-4230-209-12

LO 5-2805-259-12

TB 750-94-42

TM 3-220

TM 3-4230-209-12

TM 3-4230-209-20P

TM 3-4230-209-35

TM 3-4230-209-35P

TM 3-4230-209-ESC

TM 3-4410-201-20P

TM 3-4410-201-35


TM 3-4420-201-35P

TM 5-2805-204-14

TM 5-2805-204-24P

TM 34-9-31 1 1

DECONTAMINATION KIT, INDIVIDUAL EQUIPMENT: M280 (DKIE)

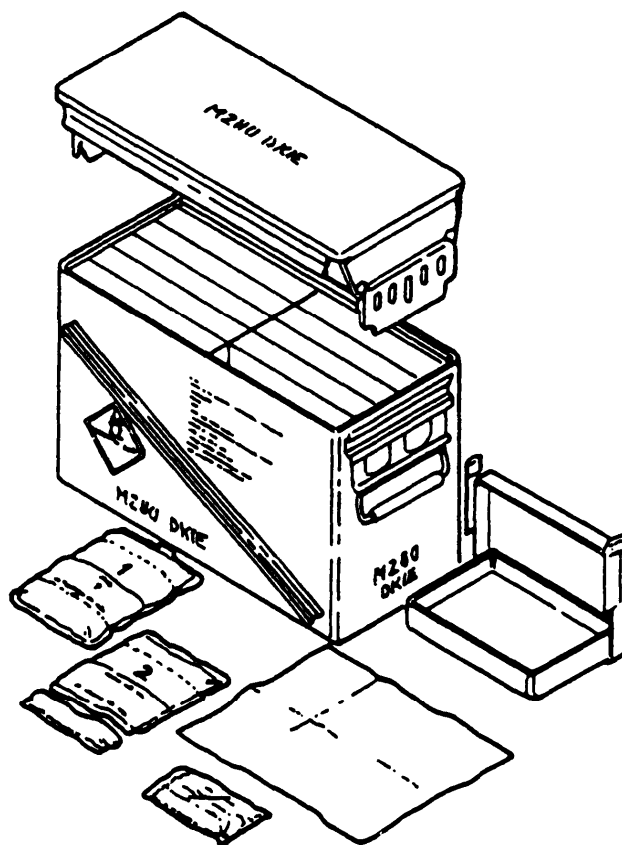

Type Classification:

Expendable; MSR 08855001

Use:

The DKIE eliminates contamination of individual equipment (CB protective gloves, overboots, mask/hood and rifle). The Individual Equipment Decontamination Training Aid (IEDIA) is used to teach you how to use your DKIE.

Description:

The M280 Individual equipment decontamination kit consists of 20 plastic decon containers. The decon containers hold one DECON 1 WIPE packet and one DECON 2 WIPE packet. Each DECON 1

WIPE contains a gauze pad soaked with a decontamination solution. The DECON 1 packet has a tab on top. Each DECON 2 contains a gauze pad and glass ampoules filled with decontamination solution.

Limitations:

DKIE is not used for skin decontamination, load bearing equipment, or porous materials.

Tabulated Data:

NSN	4230-01-208-4252
Unit of issue	KT
Basis of issue.	CTA 50-970
Weight35 lb(15.88 kg)

TM 43-0001-26-1

Dimensions:

Squad containers:

Thickness 0.720 ft (21.95 cm)
Width 1.555 ft (47.24 cm)
Height 1.190 ft (36.27 cm)

Individual containers:

Thickness 1.35 in. (3.429 cm)
Width 6.00 in. (15.24 cm)
Height 8.00 in. (20.32 cm)

Packets:

Width 5.50 in. (13.97 cm)
Length 7.50 in. (19.05 cm)


Shipping and Storage Data:

Stability in storage.....Unstable at
temperatures over 110° F
Type pack20 per squad
container (M584)
Cube.....1.328 cu ft
Weight.....35 lb
Type storage.....Warehouse
Drawing number.....P5-77-2652
5-77-2652
5-77-2659

References:

TM 3-4230-224-10

DECONTAMINATING KIT, SKIN: M258A1

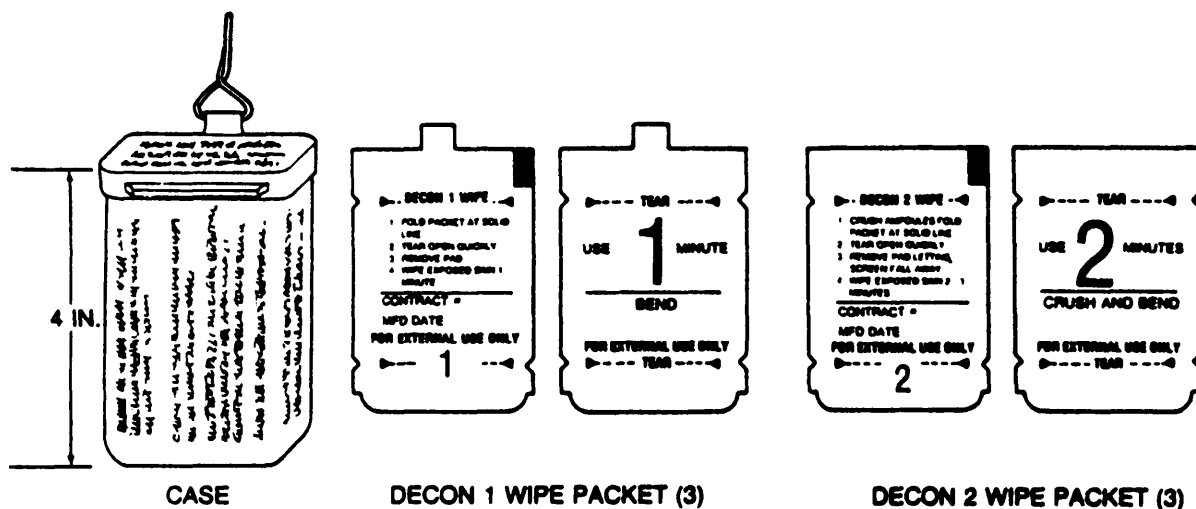*Type Classification:*

Expendable; DEVA 1180

Use:

To decontaminate the skin (but not the upper part of the face) when it has been contaminated by liquid chemical agents. It can be used in an emergency to decontaminate outside of protective mask, butyl rubber gloves, hood, and individual weapon.

Description:

The M258A1 skin decontaminating kit consists of a plastic case and six packets. The case is marked DECONTAMINATION KIT, PERSONAL M258A1. Three packets are marked DECON 1 WIPE. Each contains a gauze pad soaked with a decontamination solution. The other three packets are marked DECON 2 WIPE. Each contains a gauze pad and glass ampoules filled with decontamination solution. Instructions for use are marked on the case and packets.

Functioning:

The decontamination solutions in DECON 1 WIPE and DECON 2 WIPE react with chemical agents to neutralize them.

Limitations:

The decontamination solutions are poisonous and caustic and must be kept out of eyes, mouth, and wounds. For training, harmless simulants are available in the M58A1 skin decontaminating training kit.

Tabulated Data

NSN	4230-01-101-3984
Unit of issue	Each
Basis of issue	CTA 50-970
weight	3.02 oz
Dimensions	1.75 x 2.75 x 4.00 in.


Shipping and Storage Data

Stability in storage	Unstable at temperatures over 110°F
Type pack	100 per wooden box
Weight	3.2 lb
Cube	0.2 cu ft
Type storage	Warehouse
Specification	MIL-D-51468
Drawing number	5-77-2366

References:

TM 3-4230-216-10

DECONTAMINATING KIT, SKIN: M291

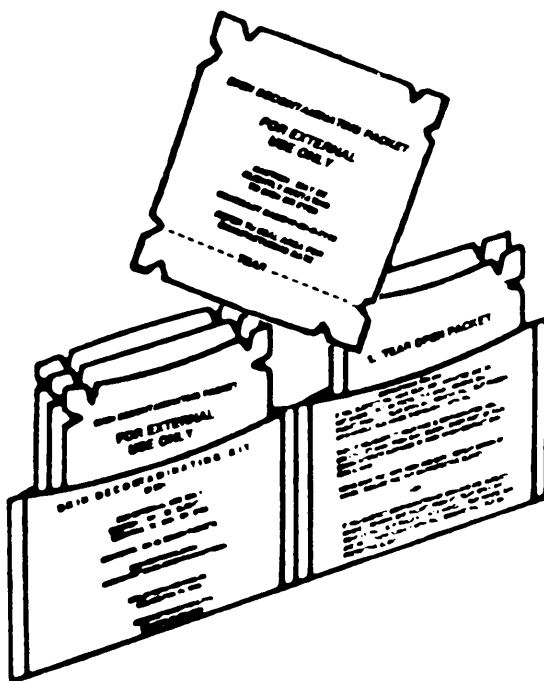

Type Classification:
Expendable

Use:

Allows complete decontamination of skin through physical removal, absorption, and neutralization of toxic agents.

Description:

Each skin decontaminating kit consists of a wallet-like carrying pouch containing six individual tear-open decon packets; enough to do three complete skin decontamination. Each packet contains an applicator pad filled with decon powder.

Functioning:

Decontamination is accomplished by application of a black powder decontamination agent contained in the applicator pad. Application to skin areas exposed to contamination is accomplished as described in TM 3-4230-229-10. The M291 skin

decontaminating kit may be used for actual combat and training purposes.

Limitations:

The decontaminating agent may be slightly irritating to skin and should not be used to decontaminate eyes, cuts, and wounds.

Tabulated Data:

NSN	4230-01-276-3905
Line item number	N/A
Unit of issue	1 box (20 kits)
Basis of issue	CTA 50-970
Weight	1.6 oz(1 kit)
Dimensions:	
Folded kit	4.4 x 4.7 x 1.4 in.
Unfolded kit	4.4 x 9.3 x 1.4 in.

Performance:

Operating temperature -50° F to 120° F


Shipping and Storage Data:

Storage temperature-60° F to 160° F
Type Pack20 kits per box
Weight 3.0 lb
Dimensions15.0 x 9.7 x 5.0 in.
Cube0.425 cu ft

SpecificationMIL-STD-2073-1
DrawingP5-77-2301

References:
TM 3-4230-229-10

IMPREGNATING SET, CLOTHING: FIELD, M3

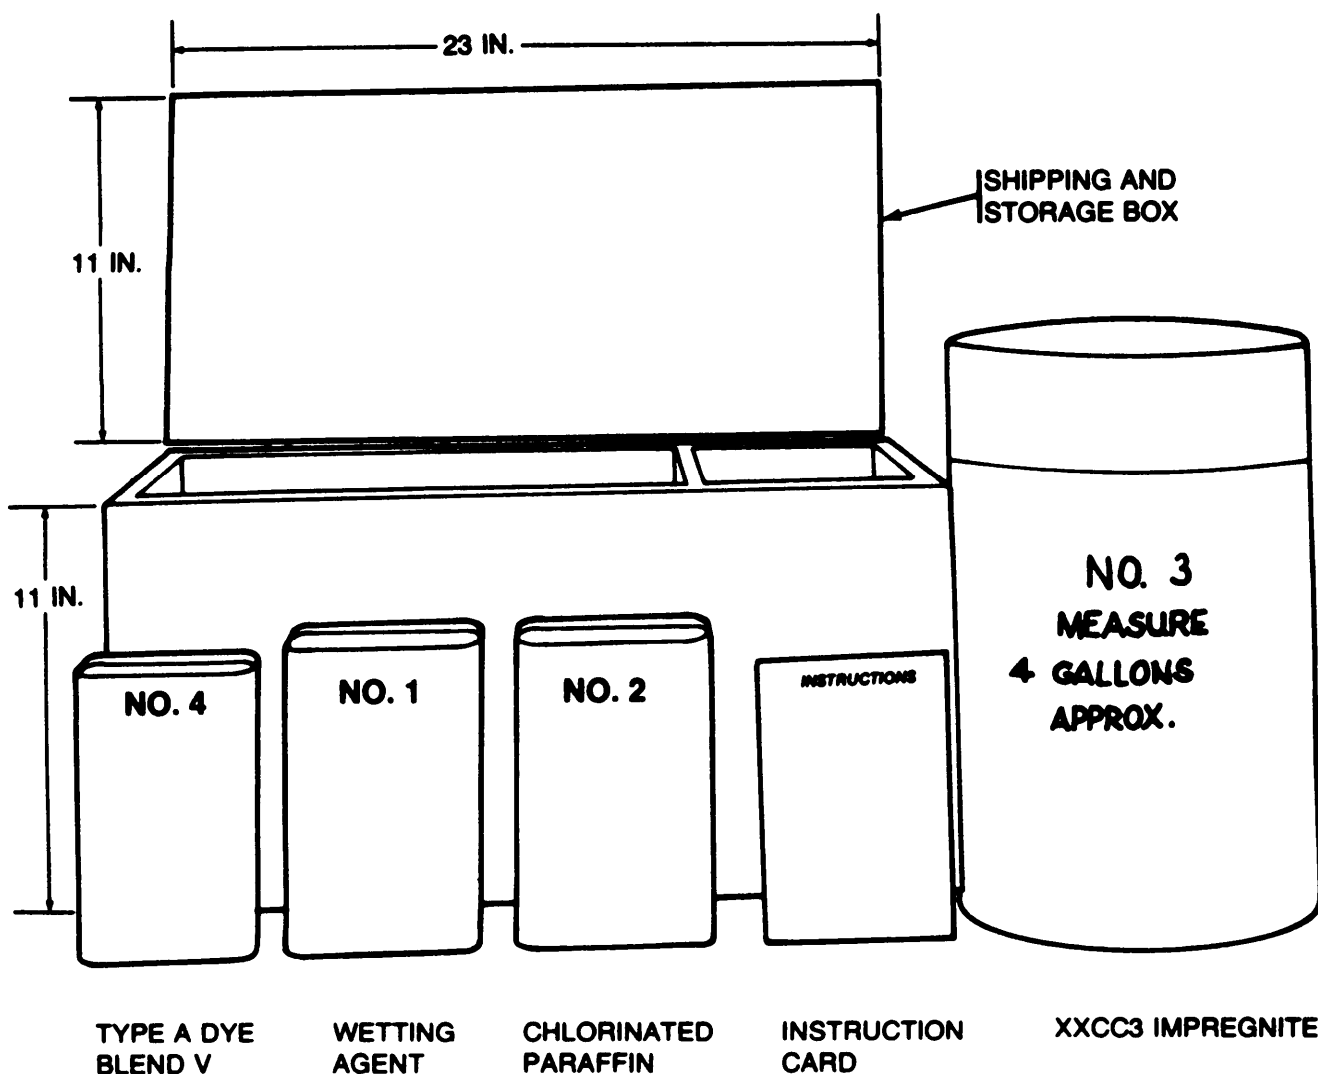

Expendable; AMCTC 951272

Use:

To reimpregnate the permeable protective outfit liners for 20 men in an emergency before or after a chemical agent attack when impregnating plant facilities are not available.

Description:

The M3 field clothing impregnating set consists of four containers of chemicals and an instruction card, packed in a wood box. The containers are numbered 1 to 4 for identification. They contain wetting agent (Santomerse 80), chlorinated paraffin, XXCC3 impregnate (chloramide), and dye mix (type A dye, blend V), respectively

Functioning:

The wetting agent aids in the absorption of the other chemicals into the clothing. The chlorinated paraffin binds the impregnate in the clothing and delays absorption of liquid agents through the cloth. The chloramide in the impregnate neutralize liquid nerve or blister agents. The dye mix is applied for camouflaging the white powders and chlorine bleach marks.

Tabulated Data:

NSN	4230-00-368-6145
Unit of issue	Each
Basis of issue	CTA 50-970
Weights (net):	
Container 1	
(Wetting agent)	1.65 lb

Container 2 (Chlorinated paraffin)	4.33 lb
container 3 (XXCC3 impregnite)	16.50 lb
Container 4 (type A dye, blend V)	1.00 lb

Performance:

The set provides the capability to reimpregnate 24 protective liner outfits.


Shipping and Storage Data:

Type pack	1 set per wooden box
weight	53 lb
Cube.	1.7 cuft
Type	Warehouse
Drawing number	5-57-29

References:

TM 3-4230-208-10

TESTING KIT, IMPREGNATE-IN-CLOTHING: ABC-M2

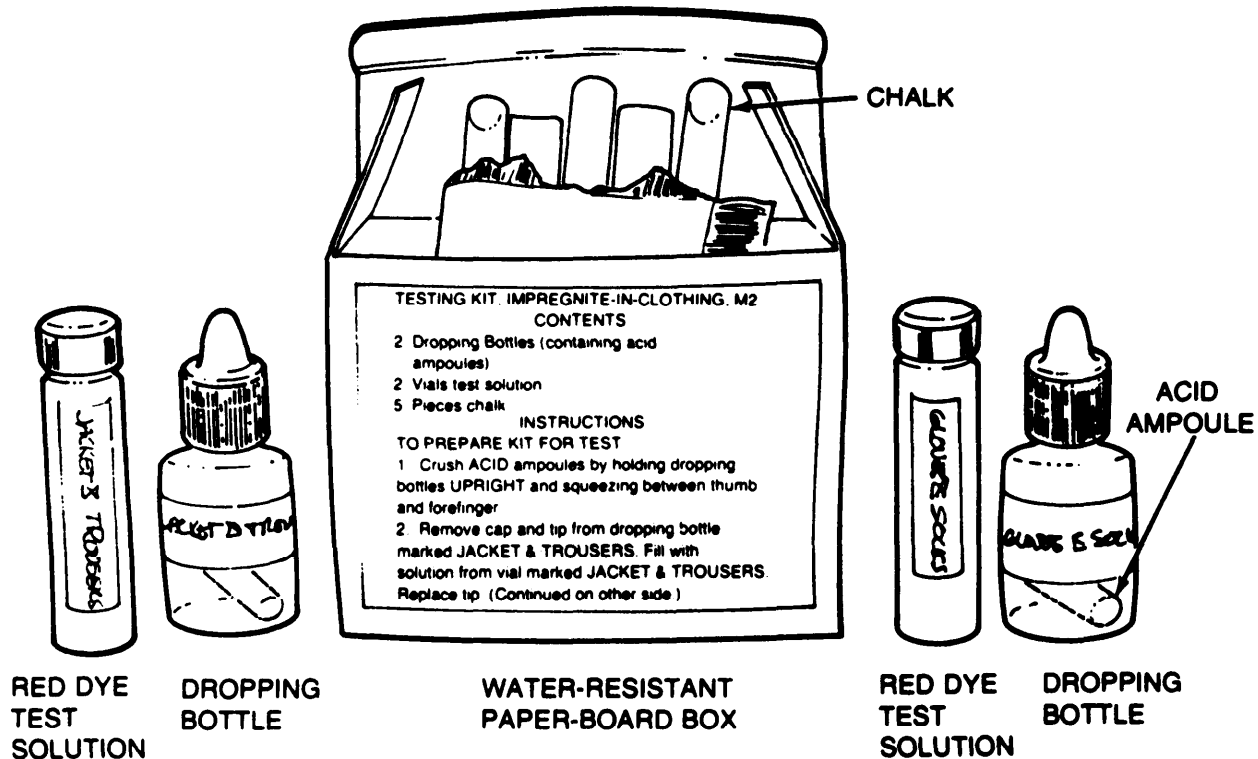**Type Classification:**

Expendable; CCTC 375360

Use:

To determine whether permeable protective clothing contains sufficient impregnate (XXCC3) to afford the wearer protection against chemical agents.

Description:

The M2 impregnate-in-clothing testing kit consists of a water resistant paperboard box containing 2 glass vials of red dye test solution, 2 polyethylene dropping bottles, and 5 pieces of white backboard chalk.

Functioning:

The dropping bottles each contain a small glass ampoule of hydrochloric acid. Test solution from the vial is added to the acid after the ampoule has been crushed in the dropping bottle. The dropping bottle is used to drop droplets on the impregnated clothing being tested. The chalk is used to rub the test droplet into the clothing and aid the reaction.

Limitations:

The kit is designed for use at temperatures above 35 degrees Fahrenheit.

Tabulated Data:

NSN	6630-00-783-8192
Unit of issue	Each
Basis of issue	CTA 50-970
Weight	0.3 lb
Dimensions	4.25 x 3.2 x 1.5 in.

Performance:

Chemical reaction with chlorine in impregnate.


Shipping and Storage Data:

Type pack	60 per fiberboard carton
Weight	23 lb
Cube	1.0 cu ft
Type storage	Warehouse
DOT hazard classification	Corrosive material
DOT shipping name	Corrosive liquid, NO 1
Drawing number	5-7-236

References:

TM 3-4230-208-10

CHEMICAL AGENT MONITOR SYSTEM (CAM)

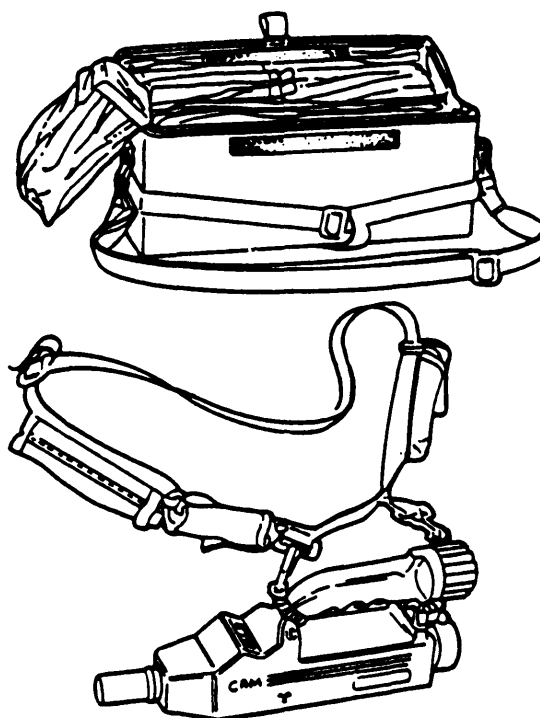

Type Classification:

STD (LCC-A)MSR 04886001

Use:

Used by ground force to search out clean areas, to search and locate contamination on personnel, equipment, ship's structures, aircraft and land vehicles, buildings and terrain, and to monitor the effectiveness of decontamination. CAM can also be used for monitoring collective protection. The Chemical Agent Monitor responds to nerve and blister agent vapors down to the lowest concentrations that could affect personnel over a short period.

Description:

The Chemical Agent Monitor system consists of a carrying case assembly, to provide stowage for all equipment and provide protection when not in use. The CAM consists of a battery to power the CAM, a display to show contamination concentration levels and malfunction information, a pneumatic system to draw in samples, a cell containing a beta radiation

source (10 millicuries of Nickle-63) to detect the presence of agent contamination, and a printed circuit board flexible wiring assembly containing a microcomputer to control operation of the CAM and detection of agents.

Functioning:

The CAM samples air in the immediate vicinity of the nozzle for the presence of nerve (G) or blister (H) chemical agents. Air sample conditions a short distance away from the CAM may be quite different, and a change in wind direction could quickly bring a hazardous level of agent vapor to a previously safe area.

The CAM has two operating modes, selectable by means of the GH mode pushbutton switch. In the G mode, CAM monitors for nerve agents; in the H mode, CAM monitors for blister agents. The selected mode is indicated on the display assembly by a G or H. An ON/OFF pushbutton switch applies 6 Vdc battery power to the CAM. A nozzle protective cap assembly contains material to clean the air within the CAM and is normally located on the front of the CAM whenever not in use.

Limitations:

The CAM is a monitor and not a detector. Since it is a monitor, it can become contaminated and overloaded (saturated). CAM can only report conditions at the front of the inlet probe. It is, therefore, a point monitor only and cannot give a realistic assessment of the vapor hazard over an area from one position.

Tabulated Data:

NSN	6665-01-199-4153
Unit of issue	EA
Basis of issue	TOE/MTOE/TDA
Line item	CO5701

Weights and Dimensions:

Weight	3.74 lb (1.7 kg)
Length	15.35 in. (38.987 cm)

Width	3.15 in. (8.001 cm)
Height	5.71 m. (14.4907 cm)

Power Requirement:

One internal 6-volt lithium-sulfur dioxide battery

Air Temperature Versus Battery Life

(continuous operation):	
113°F(45°C)	14 hours
68° F(20°C)	12 hours
32 °F(0°C)	10 hours
-13° F(- 25°C)	2 hours

Operating and Performance Range:

Operating	-13°F(- 25°C) to 113°F (45°C)
Storage	-67°F(-55°C) to 158°F (70°C)

Reference:


TM3-6665-327-13&P

CHAPTER 5

HAZARD CALCULATION

	Page
Area Predictor, Radiological Fallout: M5A2	5-3
Calculator, Downwind Toxic Vapor Hazard: Line Source, ABC-M3	5-5
Calculator, Downwind Toxic Vapor Hazard: Point Source, ABC-M2	5-7
Calculator Set, Radiac and Nuclear Yield: ABC-M26A1	5-9

AREA PREDICTOR, RADIOLOGICAL FALLOUT: M5A2

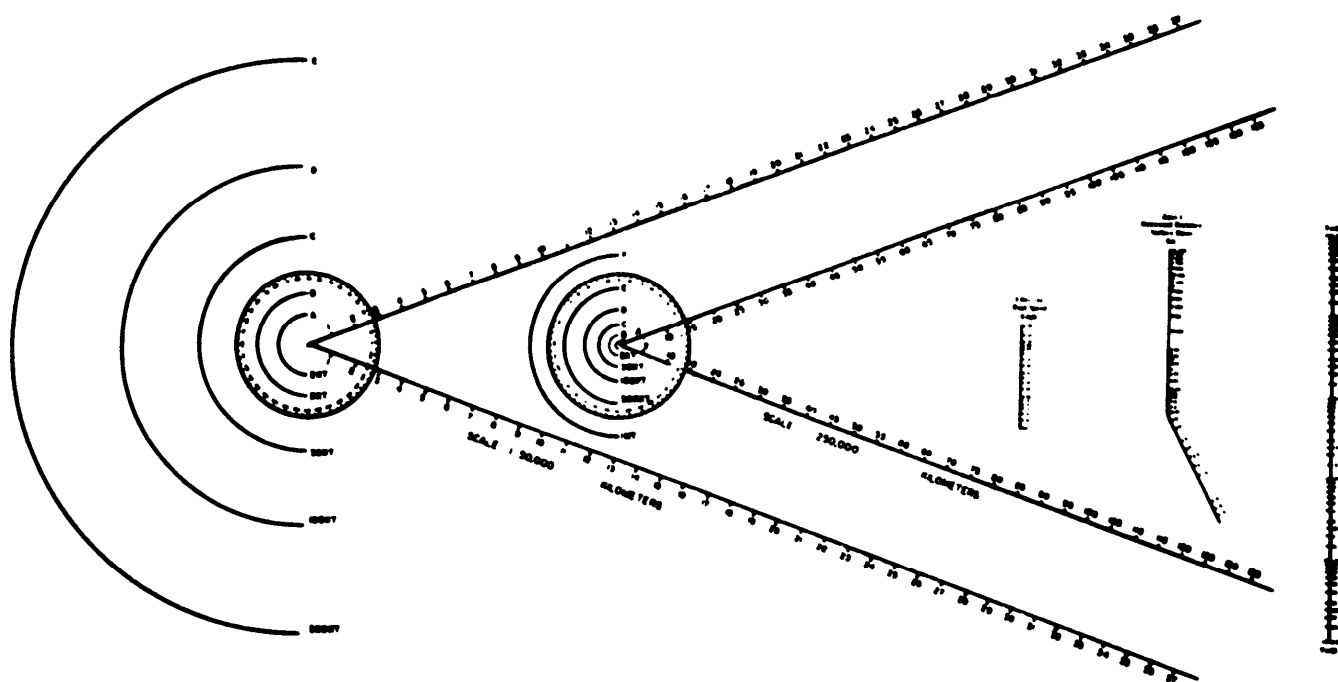

AR 600734

Type classification

Expendable; AMCTC 951272

Use:

To outline potential radioactive fallout hazard zones resulting from surface or near surface nuclear bursts when superimposed on maps scaled 1:50,000 or 1:250,000.

Description:

The ABC-M5A2 radiological fallout area predictor is a transparent sheet of plastic that has two prediction scales and a nomograph for outlining *three zones of hazard*. The scales each an azimuth dial with the center representing ground zero for the nuclear burst. One is scaled for a 1:50,000 map; and the other for a 1:250,000 map. The semicircles represent nuclear cloud radii for nuclear yield groups. The nomograph has three logarithmic scales for windspeed, nuclear yield and downwind distance.

Functioning:

Downwind distance for two predicted fallout zones can be determined and plotted using information obtained from the appropriate NBC reports.

Tabulated Data:

NSN6665-00-106-9595
 Unit of issue Each
 Basis of issue CTA 50-970
 Dimensions 23.5 x 40in.


Shipping and Storage Data:

Type pack 1 area predictor and
 TM per plastic case
 packed 25m per box
 weight 1.20 lb
 cube 1.0 cu ft
 Type storage Warehouse
 Drawing number DL 124-13-27
 Specification number MIL-A-51356

Reference:

FM 3-22
 FM 21-40
 TM 3-6665-304-10

CALCULATOR, DOWNWIND TOXIC VAPOR HAZARD: LINE SOURCE, M3

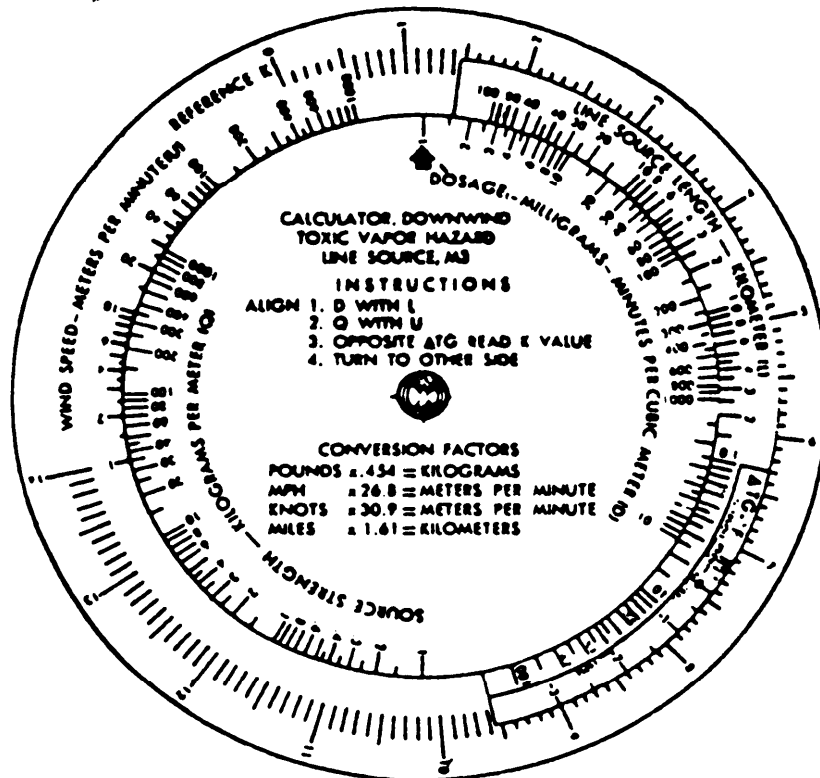

Type Classification:

Expendable; MSR 03786004

Use:

To make a quick and accurate calculation of the distance downwind that a toxic vapor cloud of a given dosage may be expected to exist when a toxic chemical agent is released from a one-time line source.

Description:

The M3 line source, downwind toxic vapor hazard calculator consists of three plastic disks mounted concentrically on a larger plastic disk. A DOSAGE (D) scale is imprinted in red on 1/3 of the outer edge of the inner disk. A SOURCE STRENGTH (Q) scale is imprinted in blue on the outer edge of the disk opposite the D scale. A LINE SOURCE LENGTH (L) scale is imprinted in red on the outer edge of the middle disk followed by a temperature gradient scale imprinted in black. A WIND SPEED (U) scale is imprinted in blue on 1/4 of the outer edge of the outer disk. A REFERENCE K scale is also imprinted in black around the outer edge covering about 3/4 of the circumference. INSTRUCTIONS, a REFERENCE K scale, and

vertical temperature gradient curves are imprinted in black on the reverse side.

Functioning:

The downwind toxic vapor hazard distance can be determined when given values of dosage, wind-speed, source strength, line source length, and vertical temperature gradient are applied according to instructions printed on the calculator.

Tabulated Data:

NSN	6665-00-893-0985
Unit of issue	Each
Basis of issue	CTA 50-970
Dimensions	6 in. (diameter)


Shipping and Storage Data:

Type pack	100 per fiberboard or plywood box
Weight	1.6 lb
Cube	0.5 cu ft
Type storage	Warehouse
Specification number	MIL-C-51212
Drawing number	DL 5-86-10

Reference:

FM 3-10

CALCULATOR, DOWNWIND TOXIC VAPOR HAZARD: POINT SOURCE, ABC-M2

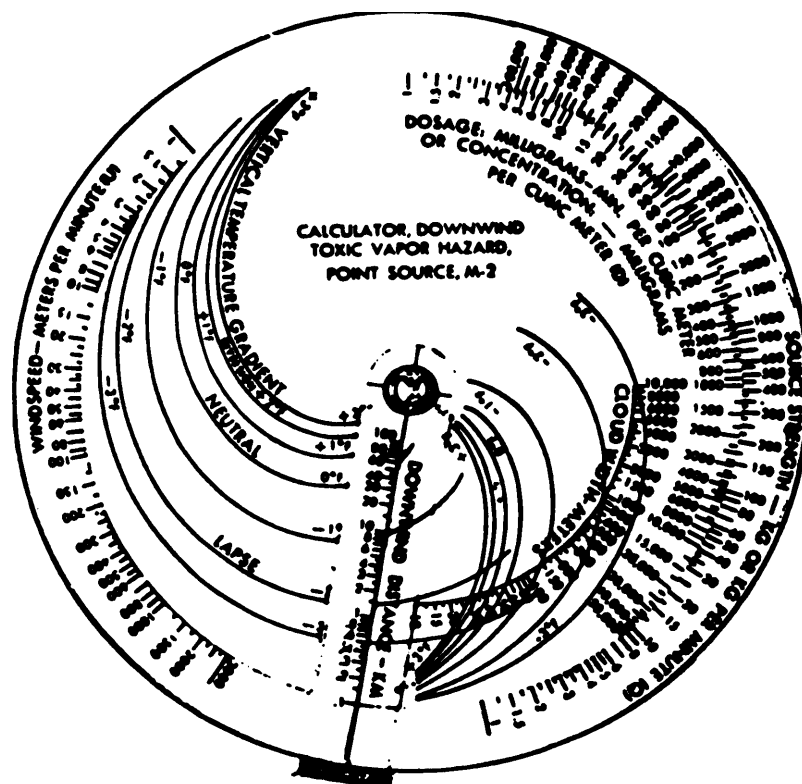

Type Classification:

Expendable; MSR 03786004

Use:

To make a rapid determination of the distance downwind that a toxic vapor cloud of a given dosage may be expected to exist when a toxic chemical agent is released from a point source.

Description:

The ABC-M2, POINT SOURCE, DOWNWIND TOXIC VAPOR HAZARD calculator consists of an outer disk and a smaller, inner disk with a swing scale superimposed on the two plastic disks. A DOSAGE (D) scale is imprinted in red on the edge of the inner disk. A cloud width scale in meters and two sets of vertical temperature gradient curves are imprinted in black on the inner surface of the disk. A WINDSPEED (U) scale is imprinted in red, and a SOURCE STRENGTH(Q) scale is imprinted in black on the edges of the outer disk. The swing scale is made of transparent plastic and is imprinted in black with a DOWNWIND DISTANCE-KM scale.

Functioning:

The downwind to vapor hazard distance can be determined when given values of dosage, windspeed, source strength, and vertical temperature gradient are applied according to instructions printed on the calculator.

Tabulated Data:

NSN	6665-00-893-0986
Unit of issue	Each
Basis of issue	CTA 50-970
Dimensions	6 in. (diameter)


Shipping and Storage Data:

Type pack	100 per fiberboard or plywood box
Weight	16 lb
cube	0.5 cu ft
Type storage	Warehouse
Specification number	MIL-C-5121 1B
Drawing number	DL5-86-3


References:

FM 3-10
FM 3-21


CALCULATOR SET, RADIAC AND NUCLEAR YIELD: ABC-M28A1

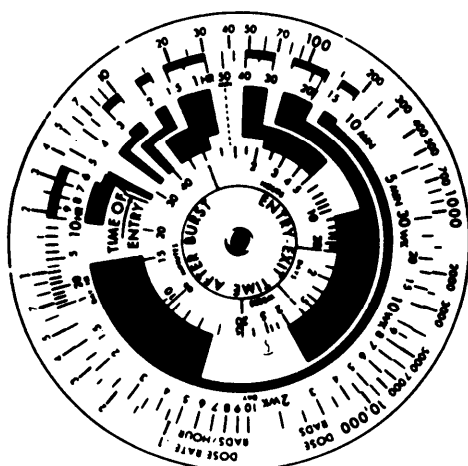


ABC-M1A1 CALCULATOR
(FRONT)

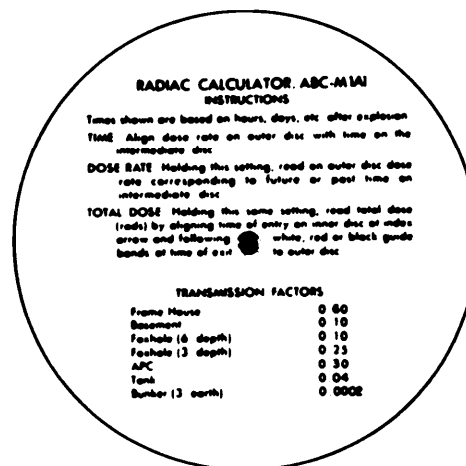

ABC-M1A1 CALCULATOR
(BACK)

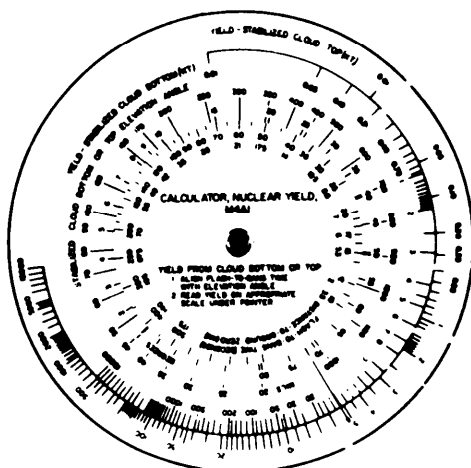

M4A1 CALCULATOR
(FRONT)

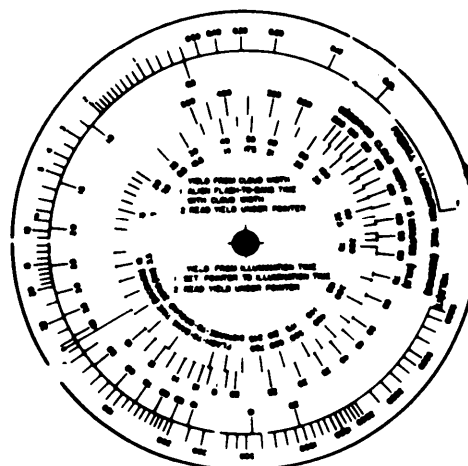

M4A1 CALCULATOR
(BACK)

Type Classification:

Expendable; AMCTC 870071

Use:

To make quick and accurate calculations of radiation hazards due to radioactive fallout and nuclear yield from a nuclear burst.

Description:

The ABC-M28A1 radiac and nuclear yield calculator set consists of an ABC M1A1 radiac calculator and an M4A1 nuclear yield calculator. The plastic calculator disks are marked with scales on the decay rate of the radioactive fallout present, the dose rate to be expected

in the monitored area, the nuclear yield, and other information about local radioactivity required by the area commander.

Functioning:

- The ABC-M1A1 radiac calculator provides a rapid method of calculating radiation hazards from a nuclear burst, using data from radiological survey reports and other sources.
- The M4A1 nuclear yield calculator provides a rapid method of calculating nuclear yield from a nuclear burst when the appropriate sets of data are known:
 - Flash-to bang time and angle to top or bottom of stabilized nuclear cloud.

TM 43-0001-26-1

- (2) Flash-to-bang time and cloud width after bang time.
- (3) Fireball illumination time.

Limitations:

The ABC-M1A1 radiac calculator is not Intended for use during buildup of radioactivity or for use by civil Defense personnel in civil defefence situations..

Tabulated Data:

NSN6685-00-130-3616
unit of issue Each
Basic of issue CTA 50-970
Dimensions 0.. 5x5 in.

Shipping and Storage Data:

Type pack 100per fiberboard or
plywood box
Weight 33.20 lb
Cube.. . . . 0.04 cu ft
Type Storage Warehouse
Specification number MIL-G-51327
Drawing number DL 5-86-34

Reference:


FM 3-22
TM 3-6665-303-10

CHAPTER 6

RADIOACTIVE SOURCES

	Page
Calibrator Set Radiac AN/UDM-1 and AN/UDM-1A	6-3
Calibrator, Radiac AN/UDM-6 (Deleted)	6-5
Calibrator, Radiac; AN/UDM-7B(Deleted)	6-7
Calibrator, Radiac:TS-1230A	6-9
Radioactive Source Set: M3A1 (Deleted)	6-11

CALIBRATOR SET, RADIAC: AN/UDM-1 AND AN/UDM-1A

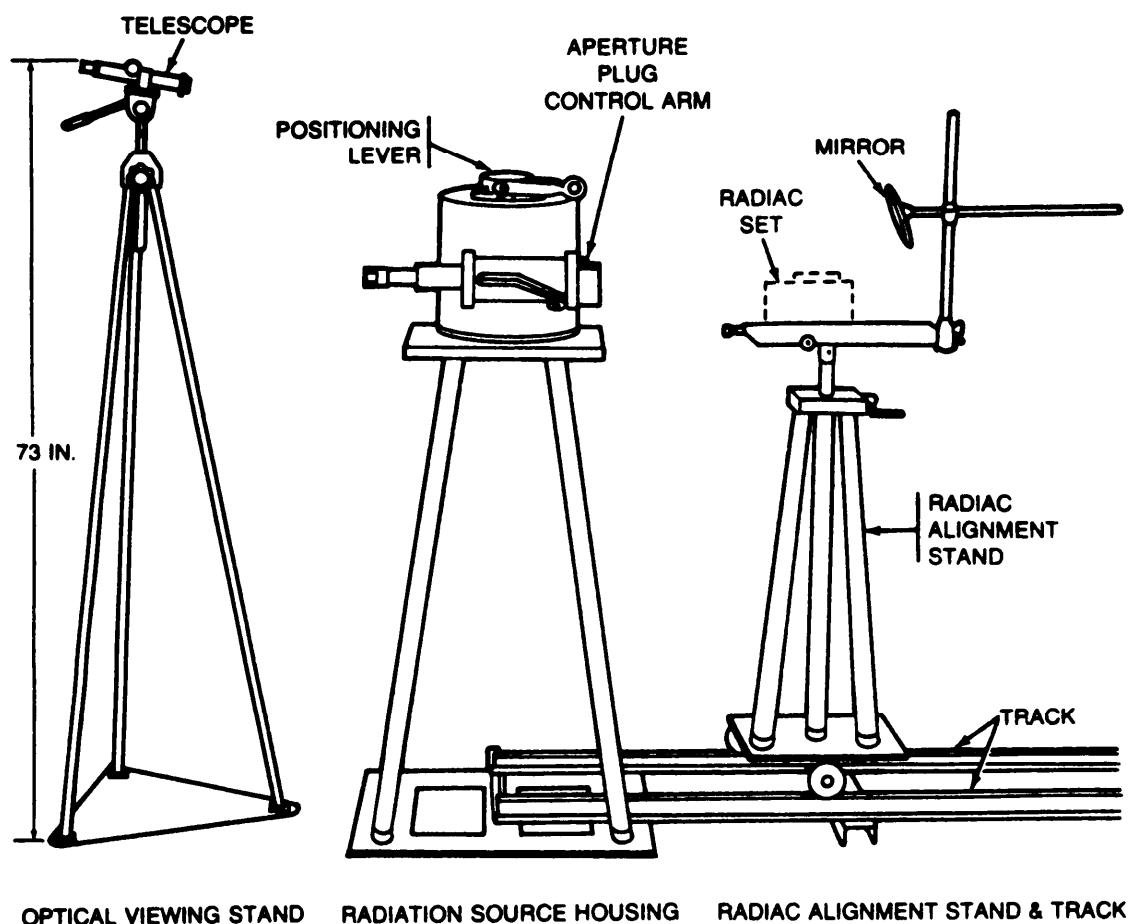

Type Classification:

AN/UDM-1A; STD(LCC-A); AMCTC 88383
 AN/UDM-1 ; STD(LCC-A); SIGNAL CORPS
 TC 302752

Use:

To provide calibration standards and suitable radioactive source for calibrating radiac instruments of both low and high range and the TS-784 ()/PD radiac calibrator.

Description

The AN/UDM-1 and 1A radiac calibrator sets consist of a radiation source housing and stand, a radiac alignment stand, an optical viewing stand, and radiac alignment stand tracks. The radiation source housing is a bad-lined brass container or chamber with a removable top used to house the radioactive isotope gamma radiation source safety.

Differences Between Models:

The AN/UDM-1 A has a Cesium 137 radioactive isotope; whereas the AN/UDM-1 has a Cobalt 60 radioactive isotope.

Functioning:

A capsule containing a small quantity of radioactive isotope, encased in the lead-shielded container with a cone-shaped opening in one side, furnishes a beam of radiation. Two controls, located a safe distance behind the container, provide all means of raising and lowering the Capsule within the container and regulating the radiation intensity of the beam.

Tabulated Data:

NSN:

AN/UDM-1A	6665-00-556-8825
AN/UDM-1	6665-00-669-0077
Line item number	C75466

Unit of issue	Each
Basis of issue	MTOE/TDA
Radiation source housing and stand (1A):	
Weight	600 lb
Length	25 in.
Width	25 in.
Height	56 in.
Radiac alignment stand (1A):	
Weight	35 lb
Length	14.5 in.
Width.	16.5 in.
Height	40 in.
Optical viewing stand (1A):	
weight	16 lb
Length	19 in.
Width.	19 in.
Height	73 in.
Radiac alignment stand tracks (1A):	
weight	120-180 lb
Length	20-30 ft
Width.	17.5 in.
Height.	4 in.

Performance:

Type of radiation	Gamma
AN/UDM-1A:	
Radiation source	Cesium 137
Initial rate of radioactivity	120 curies
Half life	30.4 years
AN/UDM-1 :	
Radiation source	Cobalt 60
Initial rate of radioactivity	9 curies
Half life	5.3 years

Shipping and Storage Data:

Type pack (1A)1 set packed
in 4 wood
boxes

Radiation source housing (1A):

Weight 800lb
Cube 16.2 cu ft

Radiac alignment stand (1A):

Weight 100 lb
Cube 7.2 cu ft

Optical viewing stand and radiation-source housing stand (1A):

Weight	152 lb
Cube	5.2 cu ft

Radiac alignment stand tracks (1A):

Weight 200 lb
Cube 9.8 cu ft

DOT hazard classification Radioactive material

DOT shipping name Radioactive
material
special form
NOS

Type storage As prescribed
by AR 385-30


Specification number:

AN/UDM-1A BUSHIPS Notice
9673
AN/UDM-1 MIL-R-16131

References:

TM 3-260
TM 3-281
TM 11-1176 (AN/UDM-1)
TM 11-6665-217-15 (AN/UDM-1A)

CALIBRATOR, RADIAC: AN/UDM-6

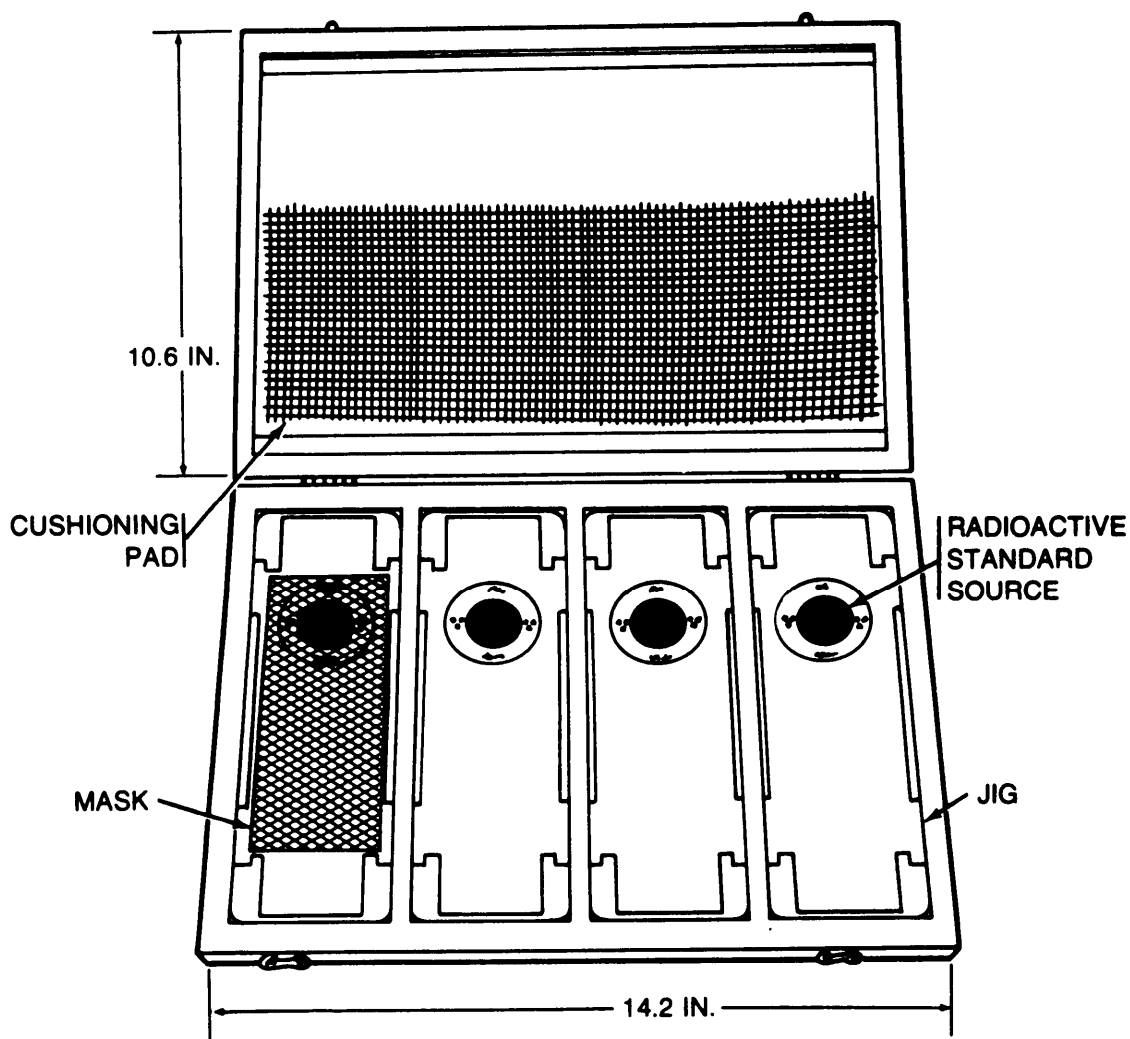

Type Classification:
STD (LCC-B); AMCTC 2679 64

Use:

To provide calibration standards and suitable radioactive sources for calibrating the AN/PDR-54 and the AN/PDR-60 alpha radiac sets.

Description:

The AN/UDM-6 radiac calibrator consists of four jigs in a hardwood carrying case, a perforated steel mask for attenuating alpha particles, and a cushioning pad. Each jig is equipped with a Plutonium 239 radioactive standard source marked with an alpha particle counting rate.

Functioning:

After controls are set and the radiac set has been checked, the alpha detector probe face on the radiac set is positioned over the active side of the radioactive source (side with the symbol). The instrument meter indications for three evenly distributed positions on the probe face area are recorded and averaged to check the calibration. The standards are used primarily to calibrate one point on each scale of the radiac sets. A second point on each scale may be calibrated by using a mask.

limitations:

The AN/UDM-6 radiac calibrator cannot be used to calibrate the AN/PDR-56 (F) radiac set which replaces the AN/PDR-54 and AN/PDR-60 radiac sets. (An AN/UDM-7B radiac calibrator is required to calibrate the AN/PDR-56 (F) radiac set.)

Tabulated Data:

NSN 6665-00-767-7497
Line item number C74507
Unit of issue Each
Basis of issue MTOE/TDA.
AR 310-34: CTA 50-900
Jig (approx)
Length 9 3/8 in.
Width 3 3/16 in.
Height 11/16 in.
Case (approx)
Length 14 3/16 in.
Width , 10 5/8 in.
Height 1 3/16 in.

Performance:

Radioactive material Plutonium 239
Type of radiation Alpha particle
Energy of alpha particles 5.15 MeV
Total quantity incalibrator 1.4 microcuries
Half life 24,360 years
Number of jigs 4
Number of radioactive
standard sources 4


Transmission factor of mask 36 percent

Shipping and Storage Data:

Type pack 1 per wood case
in a fiberboard
carton
Weight 9 lb
Cube 0.5 cu ft
DOT hazard classification Radioactive
material,
limited quantity NOS
Type storage As prescribed by
AR 365-30
Drawing number S94-1

References:

TM 3-260
TM 3-261
TM 3-6665-203-10
TM 11-6665-206-15
TM 11-6665-221-15

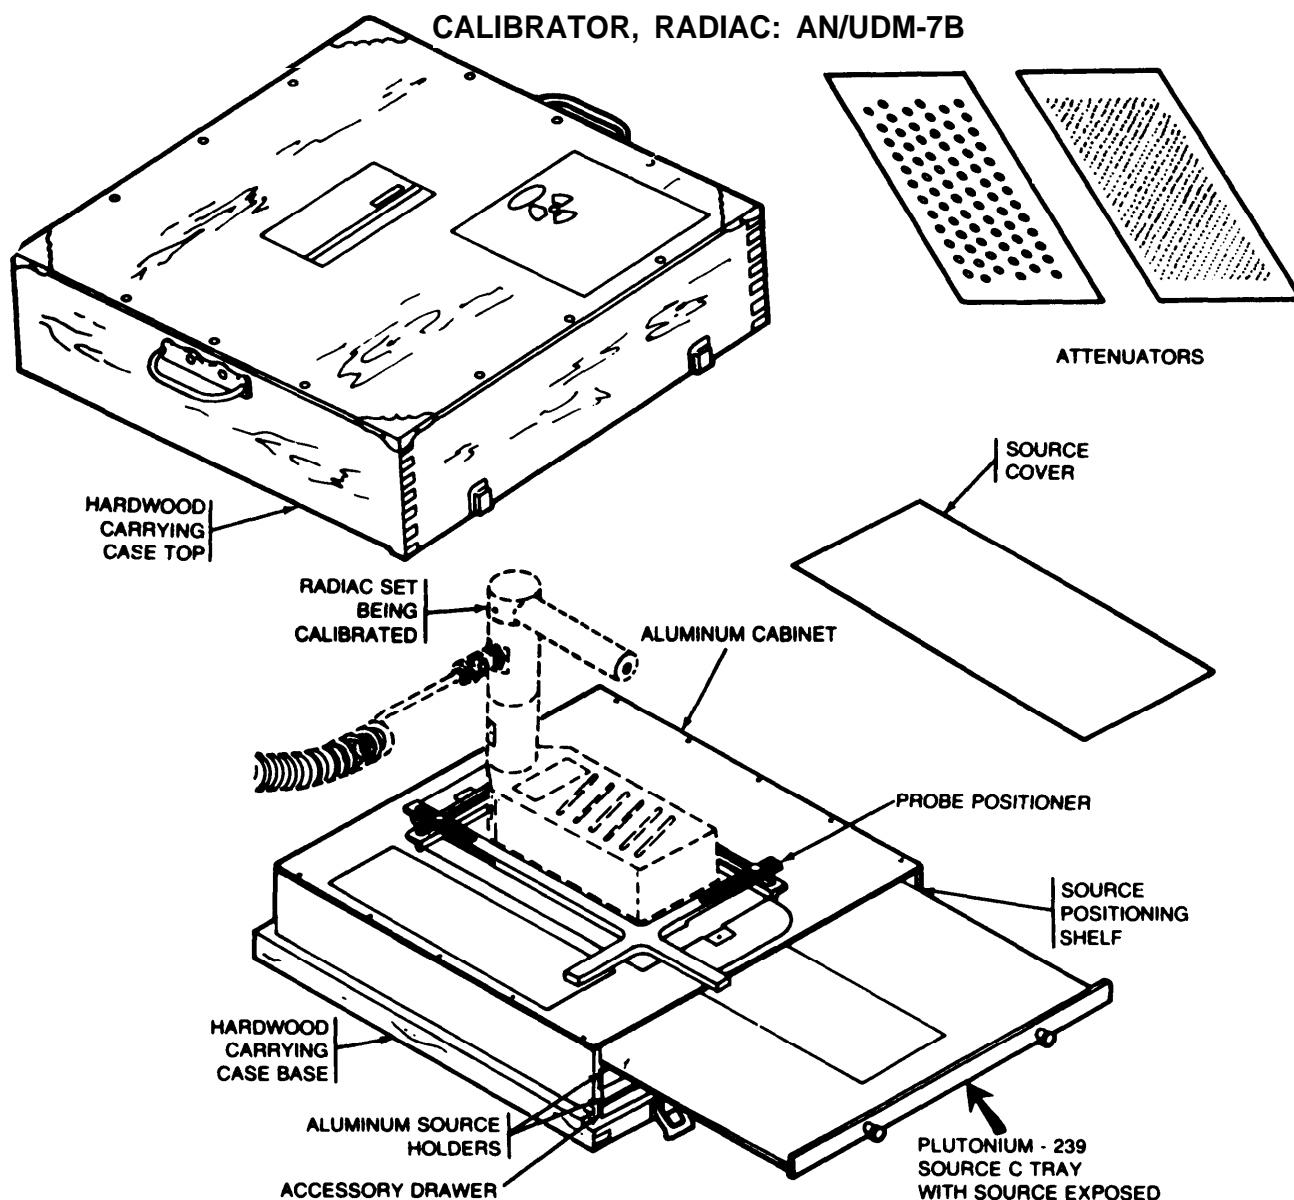*Type Classification:*

STD (LCGA); MSR 01778001

Use:

To provide calibration standards and suitable radioactive sources for calibrating the AN/PDR-54, the AN/PDR-56F, and the AN/PDR-60 alpha radiac sets.

Description:

The AN/UDM-7B radiac calibrator consists of the following components:

- a. A hardwood carrying case
- b. An aluminum cabinet used for housing the sources and accessory drawer
- c. Aluminum source holders for housing sources and accessory equipment

- d. Two alpha sources, Plutonium 239, on plastic discs labeled A and C

- e. An accessory drawer containing attenuators, a card of calibration check meter readings, an operator's manual, tweezers, and an adjustable probe positioner.

Functioning:

The probe positioner is used to position and clamp the alpha detector probe face so that it will be aligned with the effective radiation area of the source. The desired Plutonium 239 source (A or C) is inserted into the source positioning shelf. After the controls on the radiac set probe have been turned on, the meter readings from the appropriate scale on the radiac set are compared with those on the calibrator's table.

Tabulated Data:

NSN 6665-00-400-5388
Line item number C75673
unit of issue Each
Basis of issue MTOE/TDA
Weight 24.5 lb
Dimensions 15.1 X 14.8 X 4 in.

Performance;

Plutonium 239 sources:

Source A Order of 10^7
disintegrations
per minute

Source C Order of 10^5
disintegrations
per minute

Attenuator:

No. 1	Approximately 10% of transmission
No. 2	Approximately 2.5% of transmission


Shipping and Storage Data:

Type pack	1 per wood box
Weight	30 lb
cube	1.0 cu ft
DOT hazard classification	Radioactive material
DOT shipping name	Radioactive material limited quantity NOS
Type storage	As prescribed by AR 385-30
Drawing number	ANUDM7B

References:

TM 3-280
TM 3-281
TM 3-6665-213-10
TM 11-6665-203-10
TM 11-8865-208-15
TM 11-6665-221-15
TB 43-180

CALIBRATOR, RADIAC: TS-1230 A

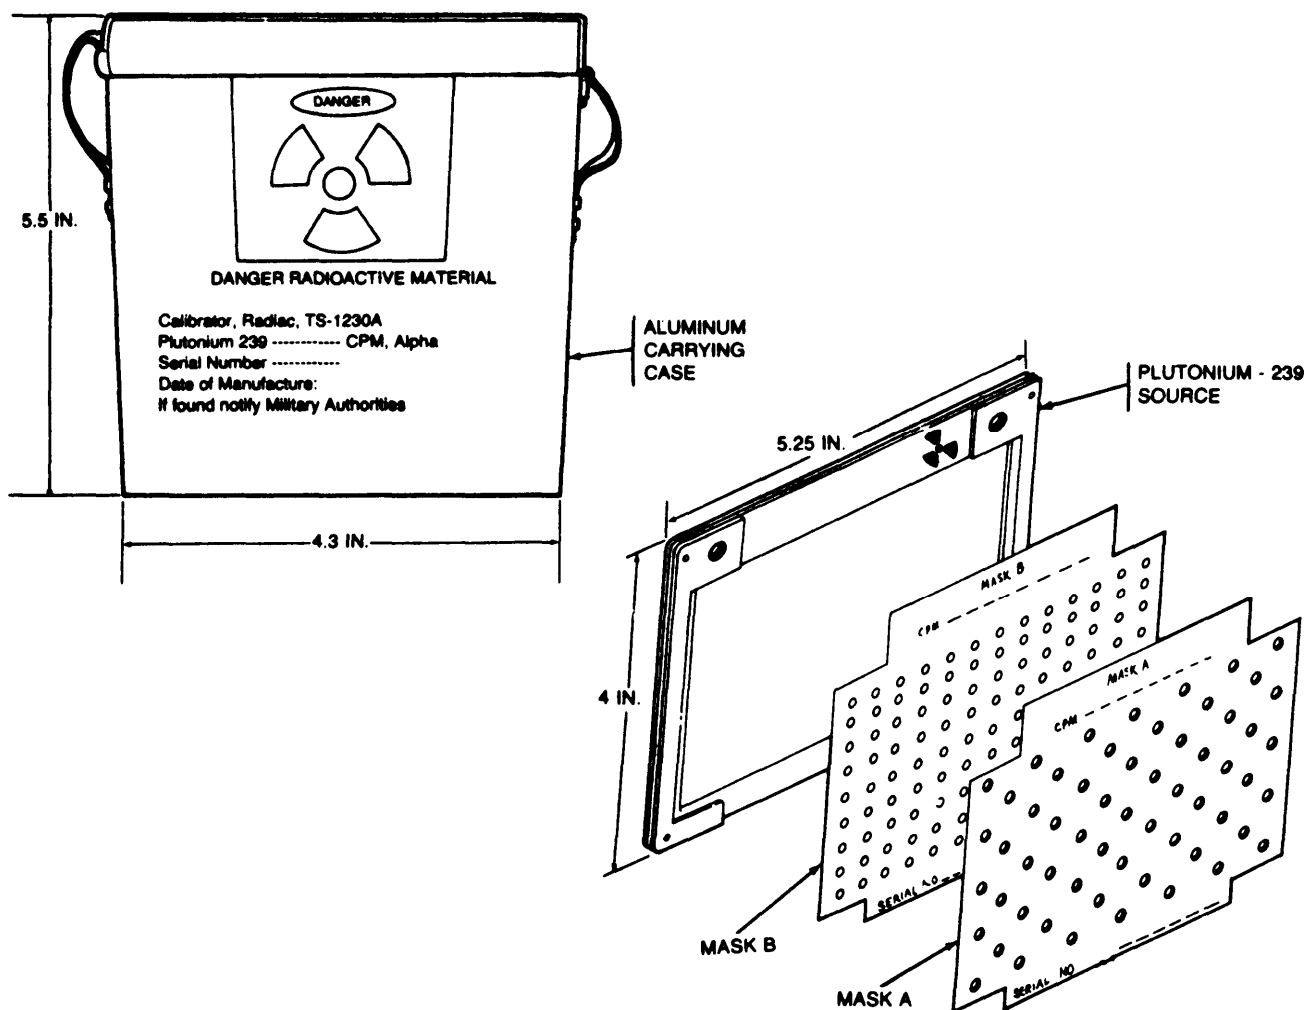

Type Classification:

STD(LCGA):AMCTC 3940 65

Use:

To provide calibration standards and a suitable radioactive source for calibrating the three ranges of the IM-156/PD (Juno SRJ-6) radiacmeter for alpha radiation.

Description:

The TS-1230A radiac calibrator consists of an aluminum carrying case; a test sample of plutonium 239 having a normal activity of 4,000,000 counts per minute; and two masks, mask A and mask B.

Functioning:

After controls are set and the radiac set has been checked, the alpha detector probe face on the radiac set is positioned over the active side of the radioactive source (side with the symbol). The instrument meter indications for three evenly distributed positions on the probe face area are recorded and averaged to check the calibration. The standards are used primarily to calibrate one point on each scale of the radiac sets. A second point on each scale may be calibrated by using a mask. Mask A and mask B attenuate the alpha radioactivity of the test sample by factors of 5 and 50, respectively. Used together, the masks attenuate the radioactivity of the sample by a factor of 100.

Tabulated Data:

NSN6665-00-973-1123
 Line item number C74370
 Unit of issue Each
 Basis of issue 1 per Radiacmeter,
 IM-156/PD

Source:

Length. 5.25 in.
 Width. 4 in.

Case:

Height 5.5 in.
 Width. 4.25 in.
 Depth 0.35 in.

Performance:

Radioactive material Plutonium 239
 Type of radiation.2 π alpha particle
 emission

Energy of alpha
 particles 5.15 million
 electronic volts

Total quantity of
 calibrator4 microcuries
 Half life 24,360 years
 Rate of alpha emission4,000,000 cpm


Shipping and Storage Data:

Type pack20 per wooden box
 weight 12lb
 Cube 0.1 cu ft
 DOT hazard classification Radioactive
 material
 DOT shipping nameRadioactive
 material limited
 quantity Nos
 Type storage As prescribed
 by AR 385-30
 Drawing number TS1230A

References:

TB 43-180
 TM 3-260
 TM 3-261
 TM 3-6655-202-10
 TM 11-6665-207-12
 TM 11-6665-208-15
 TM 11-6665-221-15

RADIOACTIVE SOURCE SET: M3A1

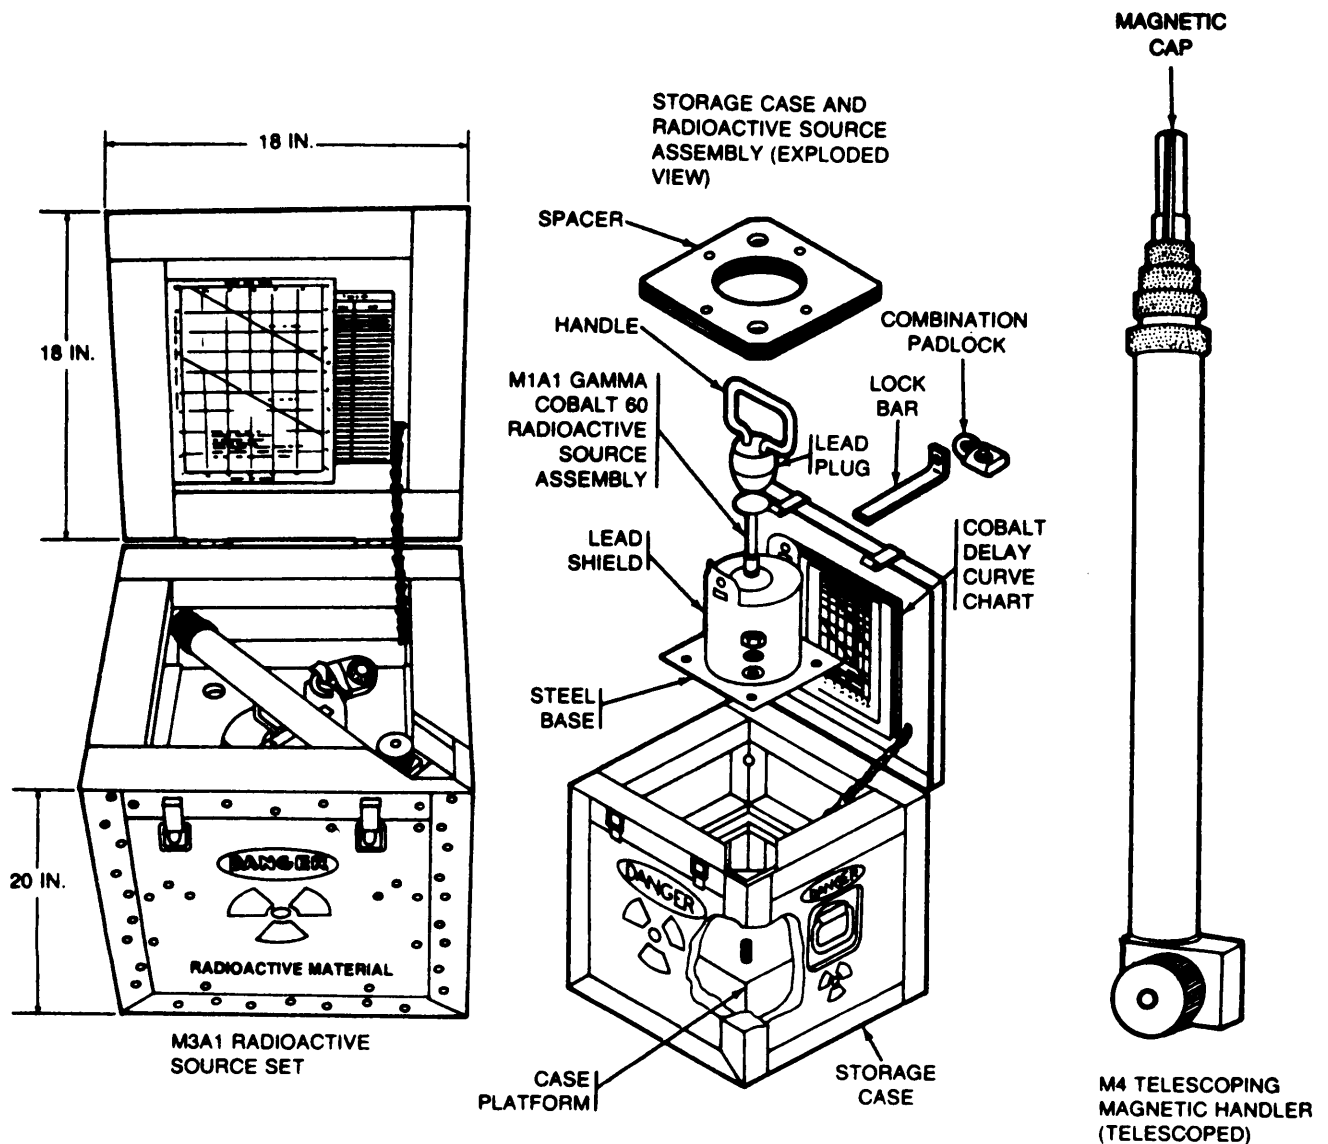

Type Classification:

STD (LCC-A):CCTC 3968 62

Use:

To train personnel in the techniques of radiological defense and to calibrate radiac instruments.

Description:

The M3A1 radioactive source set consists of a stor-

age case, an M1A1 gamma cobalt 60 radioactive source assembly, and an M4 telescoping radioactive source magnetic handler.

Functioning:

The M4 telescoping radioactive source magnetic handler is used to lift and handle the radioactive source at a safe distance. To move the source capsule, the magnetic cap on the extended handler is brought in

contact with a lifting disk on the M1A1 gamma Cobalt 80 radioactive source assembly. The radiac sets are operated from a prescribed safe distance from the radioactive source capsule. After the controls on the radiac sets have been turned on, the meter readings on the radac set are compared with those in the instructions.

Tabulated Data:

NSN	6665-00-856-8235
Line item number	Q933303
Unit of issue	Each
Basis of issue	CT 50-909
Weight:	
M3A1 radioactive	
source set	150 lb
Magnetic handler	2 1/2 lb
Dimensions (storage box)	18 x 18 x 20 in.

Performance:

Radioactive material	Cobalt
Activity at time of initial calibration	80-130 millicurie
Exposure rate at activity level of 100 millicurie Cobalt 60	132 mrad/hr at 1 meter, (158 mrad/hr at 1 yard)

Dose rate at surface of capsule	Greater than 10,000 rad/hr
Half life	5.3 years

Shipping and Storage Data:


Type pack	1 lper wood box
Weight	152 lb
cube	3.75 cu ft
DOT hazard classification	Radiative material
DOT shipping name	Radioactive material limited quantity NOS
Type storage	As prescribed by AR 385-30
Drawing number	124..12-3

References:

TM 3-280
TM 3-281
TM 3-6665-214-15
TM 43-180

CHAPTER 7 MAINTENANCE AND REPAIR

	Page
Canister, Particulate: M14	7-3
Crimping Outfits, Hydraulic, Voicemitter-Outlets Valve Assembly: ABC-M1	7-5
Indicator, Outlet Valve Leakage: M4A1	7-7
Maintenance Kit, CBR Equipment: Detector, Alarm, M273	7-8.1
Tester, Airflow, Gas-Particulate Fitter Unit: M39	7-9
Tester, Leakage, Protective Mask: DOP, M14	7-11
Test Kit, Leakage, Chemical-Biological Air Filter: M257	7-12.1
Test Sat, Chemical Agent Automatic Alarm: M74	7-13
Test Set, Chemical Agent Automatic Alarm: M140	7-15

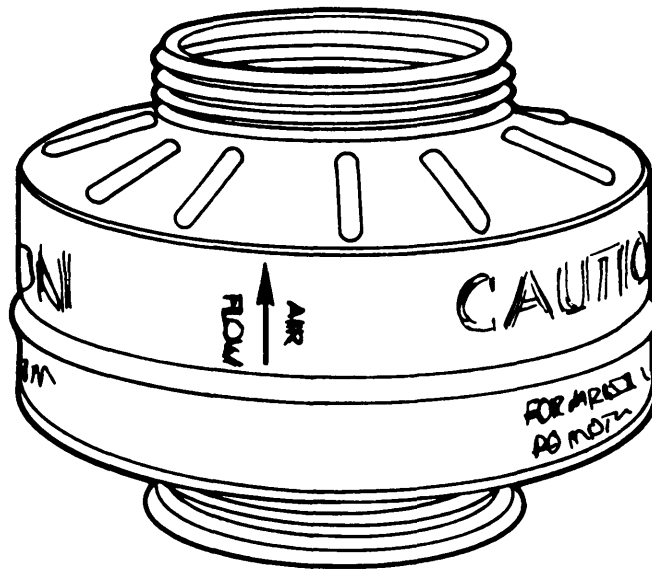CANISTER, PARTICULATE: M14*Type Classification:*

Expendable: AMCTC 9512 72

Use:

To prevent particulates from entering the piping to test head on the M14 dioctylphthalate (DOP) protective mask leakage tester. It is also used with respiratory devices such as masks or supplied air outfits to protect personnel engaged in research with biological and radiological agents against all types of particulate contaminants (aerosols) in the atmosphere.

Description:

The M14 particulate canister is a squat, cylindrical canister 4 1/4 inches in diameter by 3 1/2 inches deep with an internally threaded nozzle at the inlet end and an externally threaded nozzle at the outlet end.

Functioning:

When the M14 canister is used on the M14 DOP protective mask leakage tester, air required to simulate breathing through a mask is drawn through the M14 canister. Any aerosols such as DOP smoke are tittered from the air before it flows on through the piping to the test head. When used on respirators, breathing in draws air through the canister which filters any aerosols.

Limitations:

The M14 particulate canister does not protect against toxic gases.

Tabulated Data:

NSN	4240-00-203-3733
Unit of issue	Each
Basis of issue	CTA 50-970
Weight	0.25 lb
Diameter	4.25 in.
Depth	3.5 in.

Performance:

Filters aerosols with particle sizes of less than one micron.


Shipping and Storage Data:

Type pack	24 per fiberboard box
Weight	38 lb
cube	2 cu ft
Type storage	Warehouse
Drawing number	5-3-876
Specification number	MIL-C-10082

References:

TB 3-205-1
TM 3-6665-257-15
TM 3-6665-257-25P


CRIMPING OUTFIT, HYDRAULIC, VOICEMIITER-OUTLET VALVE ASSEMBLY: ABC-M1

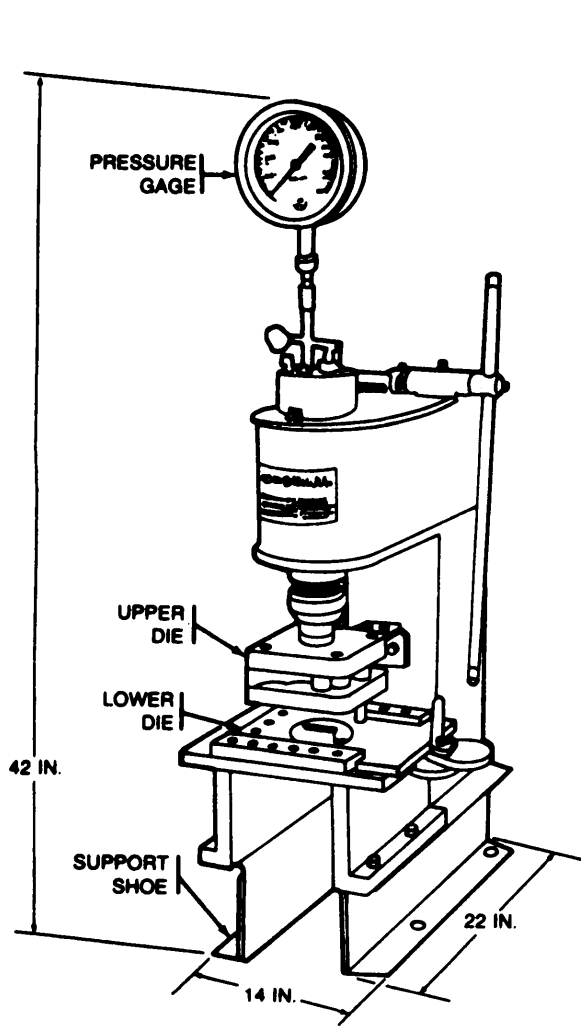

Type Classification:
STD (LCC-A): AMCTC 3934 65

Use:
To crimp the voicemitter-outlet valve assembly and the nose cup on ABGM17, M17A1, and M17A2 chemical-biological masks.

Description:
The M1 voicemitter-outlet valve assembly hydraulic crimping outfit consists of a hand-operated, single-column hydraulic press with a pressure gage, crimping dies, support shoes, roundnose pliers, and glass pliers.

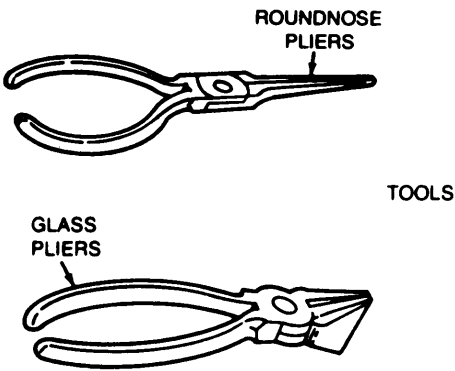

Functioning:
A prepared mask faceblank is positioned between the two dies on the hydraulic press. The press is preset to operate at 1,200 pounds per square inch. This is the pressure required for uniformly crimping the voicemitter-outlet valve assemblies and nose cups to the mask faceblanks. When the crimping has been completed, the mask is tested for leakage using the M1 4 protective mask leakage tester.

Tabulated Data:

NSN	5180-00-911-1366
Line item number	F46089
Unit of issue	Each
Basis of issue	MTOE/TDA
Weight	309 lb
Dimensions	42 x 14 x 22 in.

Performance:


Rated pressure of hydraulic press	10 tons
Pressure used for crimping	1,200 psi

Shipping and Storage Data:

Type pack	1 per wood box
Weight	343 lb
cube	11.84cu ft
Drawing number	LM 77-1-1

Reference:
TM 3-5180-210-15

INDICATOR, OUTLET VALVE LEAKAGE: M4A1

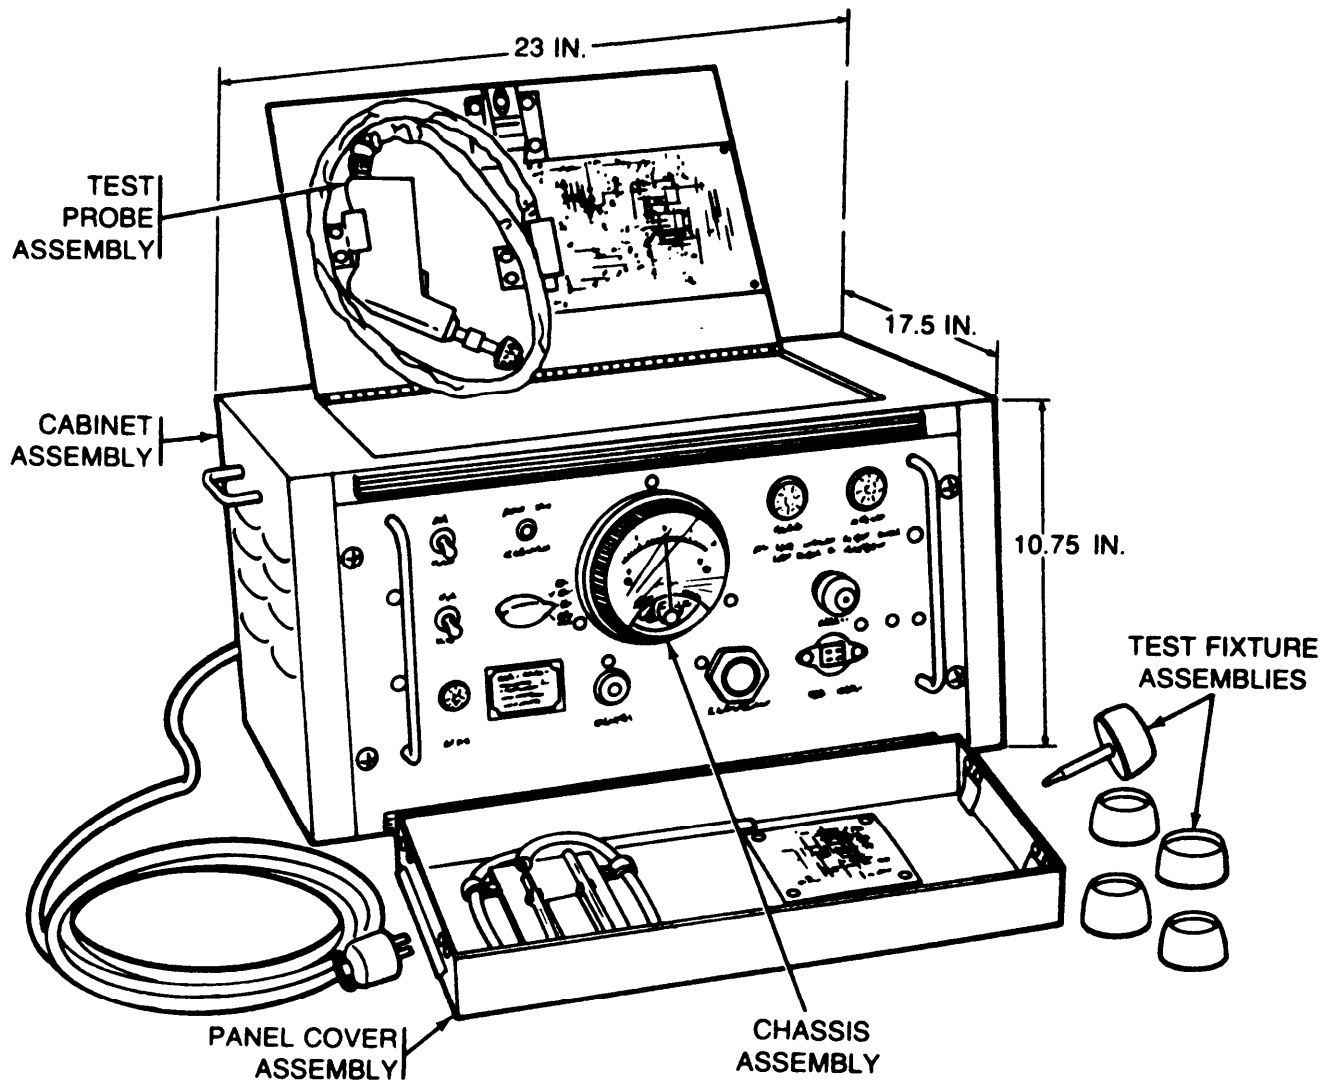*Type Classification:*

STD (LCC-A): CCTC 3853 61

Use:

To test outlet valve assemblies on chemical-biological masks during production, surveillance, and maintenance, either separately or when assembled to the masks.

Description:

The M4A1 outlet valve leakage indicator is a portable test set consisting of a cabinet assembly, a panel cover assembly, a chassis assembly, a test probe assembly, and accessory equipment.

Functioning:

The M4A1 outlet valves leakage indicator tests air leakage through outlet valves of various chemical-biological masks by comparing their leakage with leakage through a calibrated orifice of the indicator. Leakage is checked either under pressure or vacuum. Outlet valves alone can be tested directly on the indicator. Several test assemblies are provided to adapt the indicator to the various outlet valves which can be tested. Outlet valves installed in the facepieces are tested using a test probe connected to the indicator.

Tabulated Data:

NSN 6665-00-738-2128
 Line item number K72050
 Unit of issue Each

TM 43-0001-26-1

Basis of issue... .. MTOE/TDA
Weight 75 lb
Dimensions 23 x 17.5 x 23 in.

Performance:

Power source requirement 115 Vac, 1.5 amp
Compressed air 65 psi
Blower capacity Pressure or vacuum of
2 inches of water with a
leak of 280 milliliters
per minute (max)
Sensitivity 1 milliliter of air per
minute at a pressure or
vacuum of 1 inch of water


Shipping and Storage Data:

Type pack 1 per wood box
Weight 90 lb
Cube 7.2 cu ft
Drawing number 136-45-201

References:

TM 3-6665-209-12
TM 3-6665-209-20P
TM 3-6665-209-35
TM 3-6665-209-35P

MAINTENANCE KIT, CBR EQUIPMENT: DETECTOR, ALARM, M273

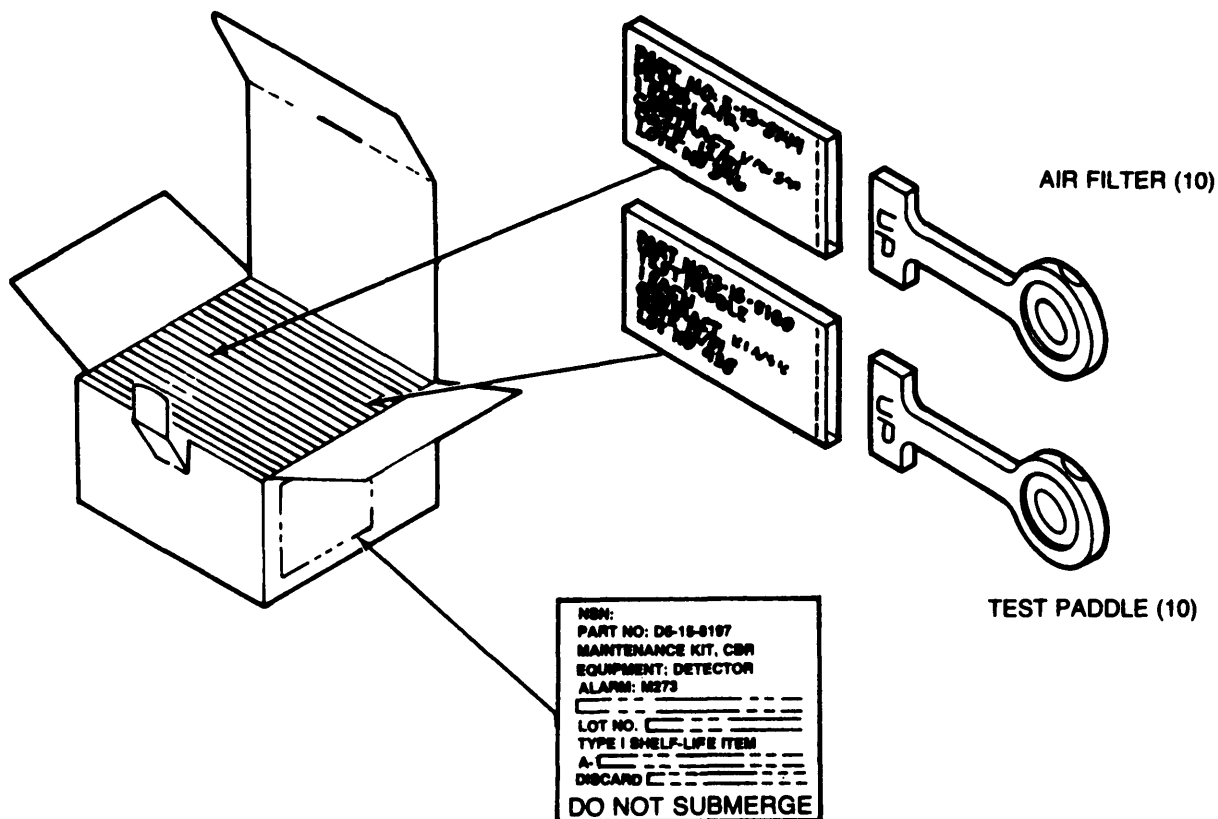

Type Classification:

Expendable; MSR 02816012

Use:

To replace air filters and test paddles expended while operating and testing the M43A1 detector unit of the M8A1 automatic chemical agent alarm.

Description:

The M273 maintenance kit consists of a fiberboard box containing ten air filters and ten test paddles for the M43A1 detector unit. Each air filter and test paddle is packed in a kraft and aluminum foil bag.

Functioning:

The air filter filters the air samples being drawn into the M43A1 detector unit air inlet. The test paddle is inserted in the air inlet in lieu of the air filter to simulate the presence of a chemical agent. If the detector cell

responds, the detector unit is functioning properly. it can be assumed that it will respond to the presence of chemical agents in the air.

Tabulated Data:

NSN5180-01-108-1729
Unit of issue Each
Basis of issue CTA 50-970
Weight Not available
Dimensions5 x 4.75 x 3 in.


Shipping and Storage Data:

Type pack Fiberboard box/ 50 per wooden box
Weight 47 lb
Cube 3.23 cu ft
Type storage Warehouse
Drawing number 5-15-8194/97

References:

TM 3-6665-312-12&P
TM 3-6665-312-30&P

TESTER, AIRFLOW, GAS-PARTICULATE FILTER UNIT: M39

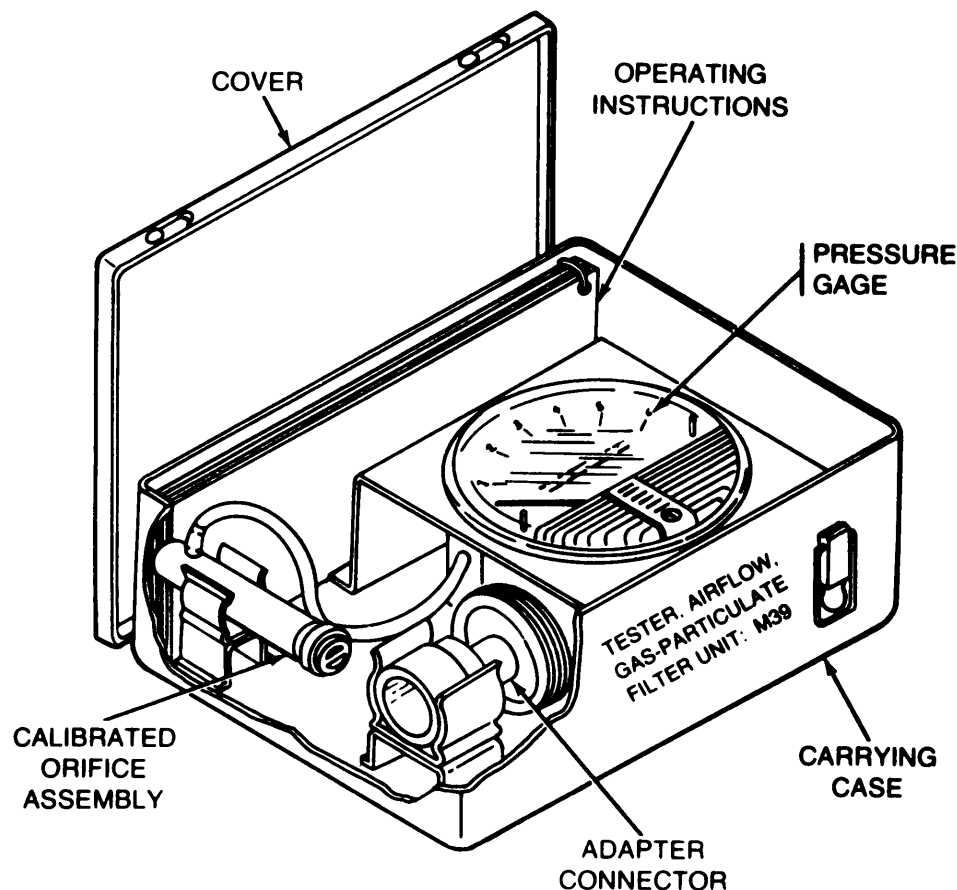

Type Classification:

STD (LCC-A); MSR 11806011

Use:

To measure airflow for gas-particulate filter units used on armored vehicles, for the M7A1 hospital gas-particulate filter unit, for the M2A1 and M2A2 air purifiers, and for M1 AI -19 precleaned and particulate filter assemblies being required.

Description:

The M39 gas-particulate filter unit airflow tester is a test kit consisting of a magnehelic pressure gage, a calibrated orifice assembly, an adapter connector, and plastic tubing assembled in an aluminum carrying case.

Functioning:

Turning on the gas-particulate filter switch activates the blower fan in the air purifier or precleaned and filter assembly. The air flows through the hose assembly and calibrated orifice to the magnehelic pressure gage. The

gage measures the pressure in inches of water. Required airflow adjustments are then made on the air purifier or precleaned and particulate filter assembly being tested.

Tabulated Data:

NSN	6680-00-436-4212
Line item number	W02526	
Unit of issue	Each
Basis of issue	TOE/MTOE/TDA	
Weight	3.50 lb	
Dimensions	7.6 x 6.8 x 3.5 in.	


Shipping and Storage Data:

Type pack	One per fiberboard box
Weight	5.25 lb
cube	0.37 cu ft
Drawing number	5-77-2120

References:

TM 3-4240-276-30&P
 TM 3-4240-282-L (Lists all reference)
 TM 3-6680-316-10

TESTER, LEAKAGE, PROTECTIVE MASK: DOP, M14

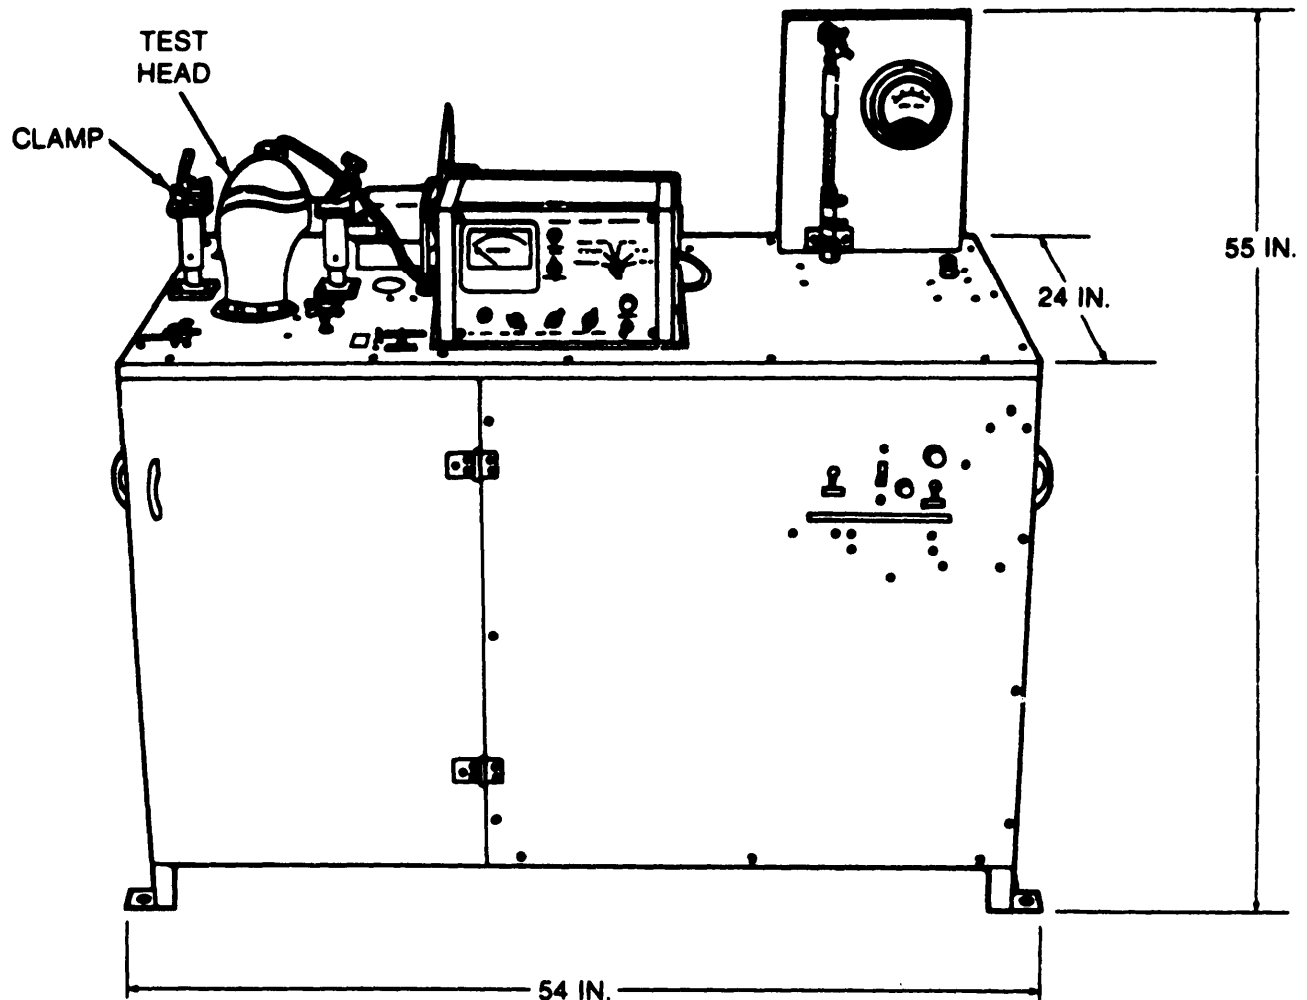

Type Classification:

STD (LCC-A): AMCTC 4891 66

Use:

To test chemical-biologloal masks for leakage during repair operation.

Description:

The M14 DOP protective mask leakage tester is an electrical-mechanical testing unit housed in a steel cabinet. Different types of test heads and clamps are provided to fit the different mask configurations to be tested.

Functioning:

Four operating cycles are performed on the M14 leakage tester. These are the clear, toot, and purge operating cycles and calibrating for 100 percent DOP Indication.

Tabulated Data:

NSN6665-00-911-3552
Line Item numberW03346
Unit of issue Each
Basis of issueMTOE/TOE/TDA
Weight 747 lb
Dimensions54 x 24 x 55 in.

TM 43-0001-26-1

Performance:

Power requirement.....115 \pm 5Vac
Air supply pressure50-70 psi
DOP smoke generator
 Reservoir capacity1 gal
 Type liquiddioctylphthalate (DOP)
 Air Pressure.....3 psi
Vacuum pump:
 Capacity8 cfm
 Motor (electric)1/2 hp


Shipping and Storage Data:

Type pack1 per wood crate
Weight922 lb
cube.....94 cu ft
Type storage.....Warehouse
Drawing number..... 136 42-750

References:

DM3-6665-257-1

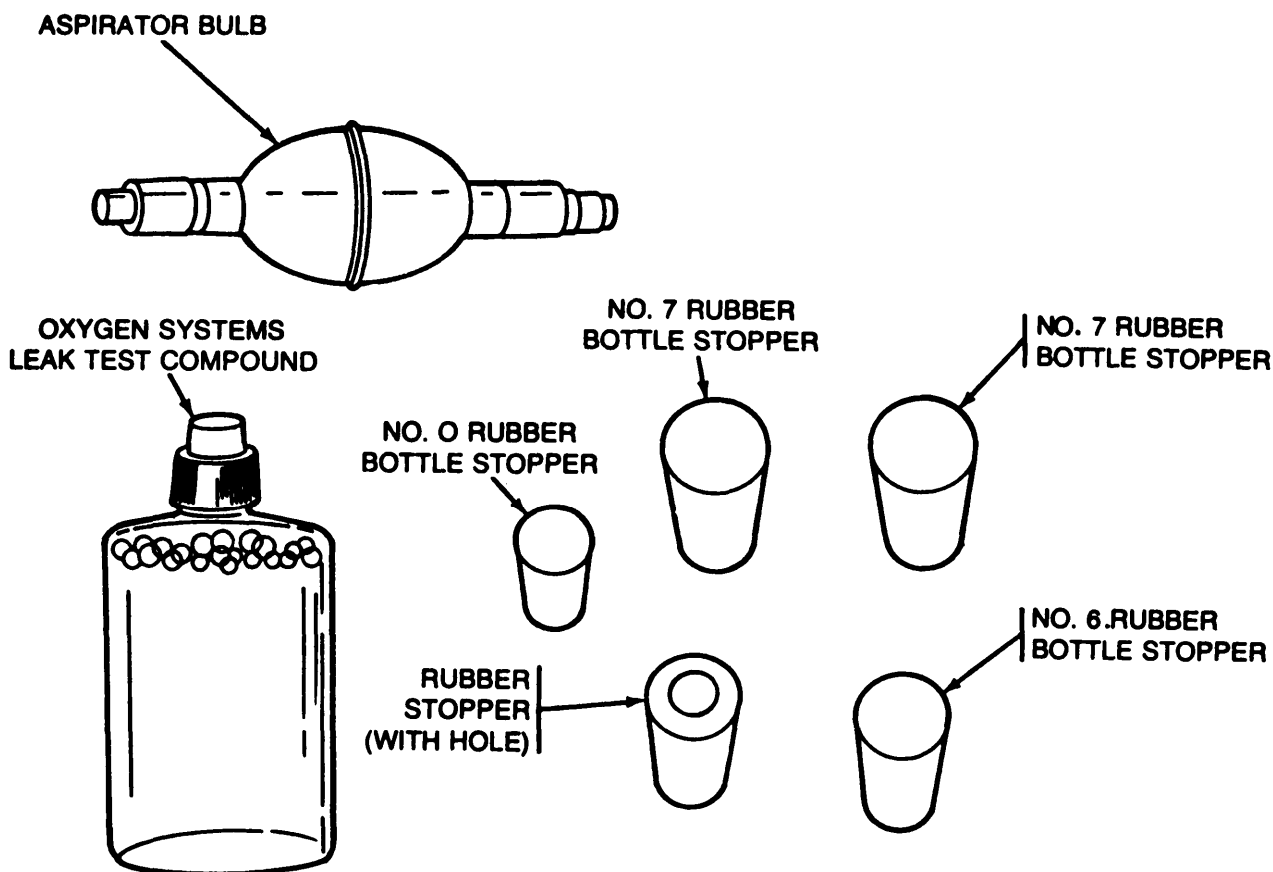

TEST KIT, LEAKAGE, CHEMICAL-BIOLOGICAL AIR FILTER: M257*Type Classification:*

Expendable; MSR 07766002

Use:

To test the M46 chemical-biological air filter of the Protective Outfit, Toxicological: Microclimate Controlled (POTMC) for air leaks.

Description:

The M257 chemical-biological air filter leakage test kit consists of an aspirator bulb, two No. 7 solid rubber bottle-stoppers, a No. 6 solid rubber bottle-stopper, a No. 0 solid rubber bottle-stopper, a rubber bottle-stopper with a hole, and a 4 oz bottle of oxygen systems leak test compound.

Functioning:

The components of the M257 test kit are used to test for leaks in the front housing manifold or in the assembled front housing of the M46 air filter. The rubber stoppers are plugged into connectors on the rubber components of the filter. The aspirator bulb is used to inflate the rubber components of the M46 filter unit. The compo-

nent being tested is then submerged in water. (As an alternate, the leak test compound can be applied around the manifold.) Tests for air leakage are made by tracing any bubbles formed in the water or the alternate leak test compound.

Tabulated Data:

NSN	4240-00-300-0776
Unit of issue	Each
Basis of issue	CTA 50-970
Weight	0.7 lb
Dimensions	6 x 2.5 x 4 in.


Shipping and Storage Data:

Type pack	1 per fiberboard box
Weight	0.7 lb
Cube	0.035 cu ft
Type storage	Warehouse
Drawing number	DL5-3-1004

References

TM 3-4240-273-20&P
TM 3-4240-294-13&P

TEST SET, CHEMICAL AGENT AUTOMATIC ALARM: M74

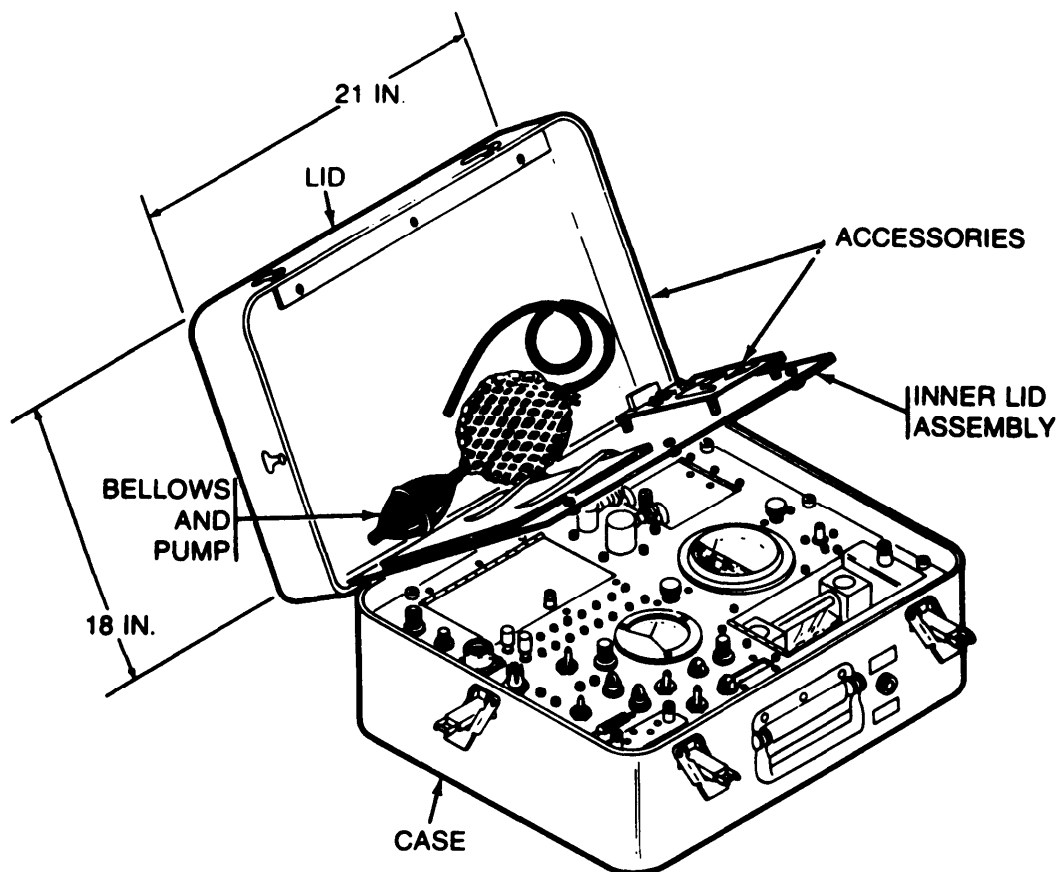*Type Classification:*

STD (LCGB); MSR 02816012

Use:

To test and calibrate the M43 detector unit and test the M42 alarm unit of the M8 automatic chemical agent alarm.

Description:

The M74 chemical agent automatic alarm test set consists of electrical, pneumatic, and mechanical circuits and components housed in a portable, watertight case with a hinged lid and folding handle. Accessories are secured under the lid by an inner lid assembly.

Functioning:

The electric circuits in the M74 test set are used to check the operational status of the M42 alarm unit circuit card and the electronic module, pump motor, air-inlet heater cycling, and the electronic chassis components of the M43 detector. Power for operation is obtained from BA3517/U and BB501/U batteries, the M10 power supply, or any other power source supplying 24 to 38

Vdc at 2 amperes. The pneumatic system operates under differential pressure up to 62.5 cm of water and is used to check the pneumatic system components of the M43 detector unit for proper flow capacity and leakage. Test fixtures and gages mounted in the lid of the M74 test set are used to check alignment of certain critical parts and to adjust spring tension in the M43 detector unit pump module.

Tabulated Data:

NSN6665-00-854-4147
Line item number V70559
Unit of issue Each
Basis of issue TOE/MTOE. AR 310-34
Weight 29 lb
Dimensions21 x 18 x 10 in.

Performance:

Operating temperature range From 0°F to 120°F
Power requirements24 to 36 Vdc, 2 amps
Pressure-vacuum0 to 62.5 cm of water


Shipping and Storage Data:

Type pack Wood box
weight 66 lb
Cube 5 cu ft
Dimensions26 x 22 x15 in.
Type storage Warehouse
storage temperature From -65°F to160°F
Drawing number5-15-5360

References:

TB 3-6665-260-50
TB 43-180
TM 3-6665-260-14
TM 3-6665-260-24P
TM 3-6665-302-34

TEST SET, CHEMICAL AGENT AUTOMATIC ALARM: M140

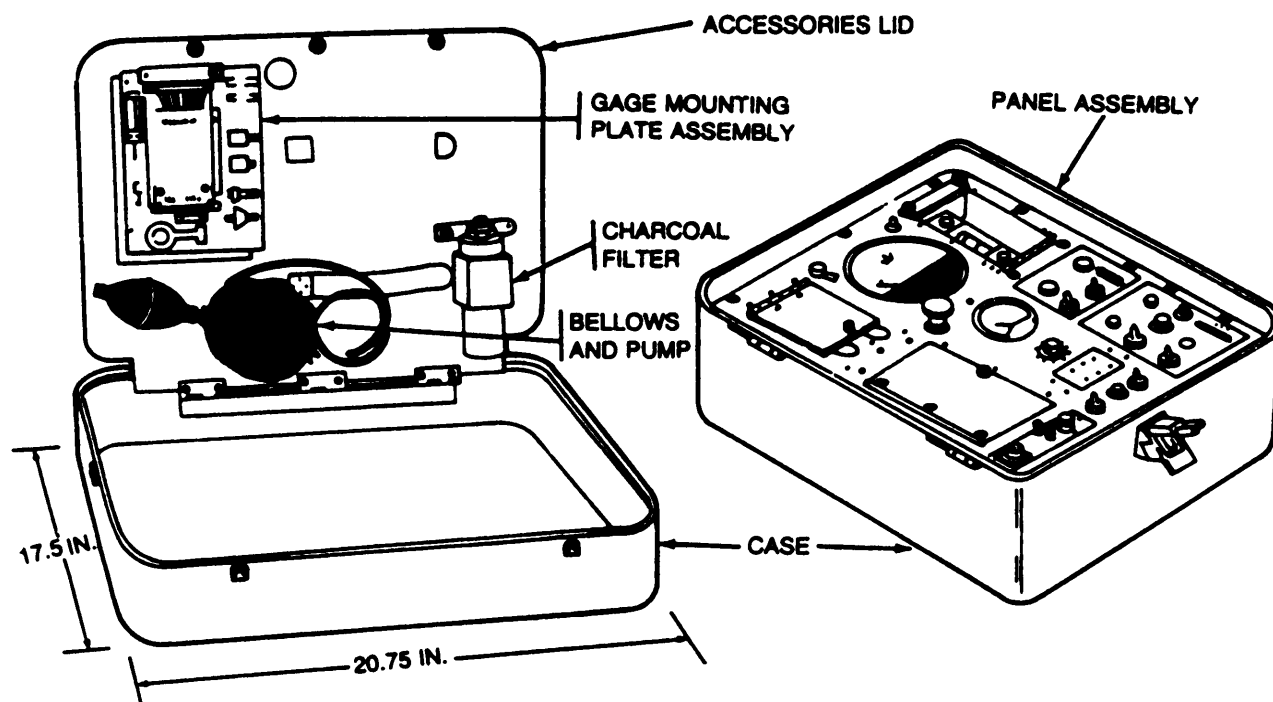*Type Classification:*

■ STD (LCC-A); MSR 02816012

Use:

To test the M43A1 detector unit and M42 alarm unit for operational capability of the M8A1 automatic chemical agent alarm.

Description:

The M140 test set consists of a panel assembly, an electronic components assembly, and a two-section aluminum case. The panel assembly contains the electrical and pneumatic circuits, meters, and controls. The electronic components assembly is a single circuit board containing electronic testing components. It is located underneath the panel assembly. A lid on the case contains test set accessories such as charcoal filter, bellows and pump, and gage mounting plate assembly.

Functioning:

The M140 test set operates on an electrical power source that supplies 24 Vdc to 36 Vdc at two amperes such as a BA3517/U or BB5501 /U battery or an M10 or M10A1 power supply. Fixtures from the gage mounting plate assembly are used to prepare the test set for testing. The charcoal filter is used for the detector unit input voltage test. Pneumatic lines and electrical cables in the panel assembly are used to connect the detector unit or its modules to the test set. The bellows and pump are used to pressurize the pneumatic testing system in the panel assembly. The pneumatic system operates under differential pressure up to 62.5 cm of water. It is used to check the M43 detector unit and its pump module and cell module for proper air flow capacity and leakage. The electronic circuits of the test set are used to check the electronics module, pump motor, airinlet heat cycling, and the electronic chassis components of the M43A1 detector unit. They can also be used to check the M42 alarm unit circuit board.

TM 43-0001-26-1

Tabulated Data:

NSN 6665-01-063-2749
Line item number T70627
Unit of issue Each
Basis of issue TOE/MTOE
Weight 30 lb
Dimensions 20.7 x 17.50 x 10.00 in

Performance:

Operating temperature range 0° to 120°F
Power requirements 24 to 36 Vdc,
2 amperes
Pressure - Vacuum 0 to 62.5 cm of water

Shipping and storage Data:

Type pack Wood box
Weight 67 lb
Cube 5 cu ft
Type storage Warehouse
Drawing number 5-15-8200

References:


TM3-6665-329-13&P
TB 3-6665-317-35
TM 3-6665-312-12&P
TM 3-6665-312-30&P
TM 43-0002-31

CHAPTER 8

TRAINING

	Page
Refill Kit, Training Aid, Skin Decontaminating (for M58A1 Training Aid)	8-3
Simulator, Detector Ticket, Chemical Agent: VG, M5 (Deleted)	8-5
Simulator, Detector Unit, Chemical Agent Automatic Alarm, M81	8-6.1
Simulator, Detector Tickets, Chemical Agent: Training M256 (TRAINS)	8-6.3
Training Aid, Skin Decontaminating: M58A1	8-7
Training Set, Chemical Agent Identification: Simulants, M72A1 and M72A2	8-9

SIMULATOR, DETECTOR UNIT, CHEMICAL AGENT AUTOMATIC ALARM, M81

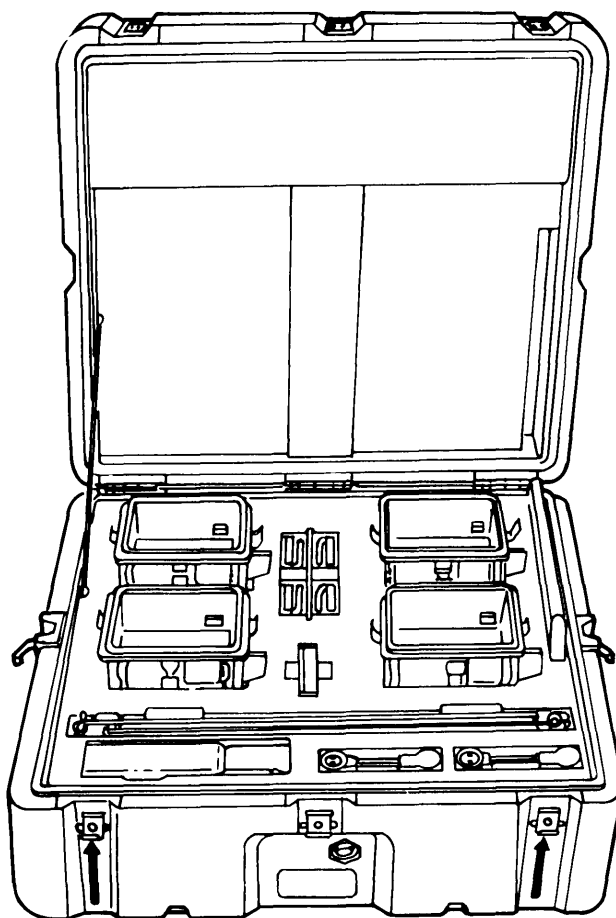*Type Classification:*

Std (LCC-A)06856003

Use:

To train personnel to detect simulated chemical agents detection using electrical signals instead of chemical sources.

Description:

The M81 chemical agent automatic detector simulator transit case houses and protects four receivers, five antennas, four extender cables, one transmitter, one tone module case, and four interface cables.

Functioning:

The simulator can imitate a moving chemical-agent cloud by causing detectors to alarm one at a time or in

groups. The transmitter signals are coded so that only certain predetermined receivers will pick up the signal and alarm. The number of receivers that are required can be varied, depending on the training exercise. The receivers and transmitters are parts of a set, and will only operate as sets; therefore, mixed units will not work together.

Limitations:

Temperature

Operating 20 °F(−6.7°C) to 100° F(37.8°C)

Storage −40°F(−40°C) to 140°F(60°C)

Humidity Up to 100 % relative humidity

Operational in rain or snow, but must not be submerged.

Tabulated Data:

NSN	6665-01-088-4789
Unit of issue	Kit
Basis of issue	TOE/MTOE
Line item number	S55624
Receiver:	
Length	7.54 in. (19.2 cm)
Width	6.28 in. (16.0 cm)
Height	5.75 in. (14.6 cm)
Weight	2.5 lb(1.13 kg)
Transmitter:	
Length	8.75 in. (22.2 cm)
Width	3.76 in. (9.6 cm)
Height	2.10 in. (5.3 cm)
Weight	2.5 lb(1.13kg)
Transit Case (full):	
Length	24.25 in. (61.6 cm)
Width	25.88 in. (65.7 cm)
Height	12.31 in. (31.3 cm)
Weight	45 lb (20.4 kg)

Electrical Characteristics:

Receiver:

Frequency type and range: ... VHF, 141.925MHz
 Operating voltage: ... +12V± 15%
 Max standby current: ... 20 mA at +12 V
 Max receive current: ... 150 mA at+12V

Transmitter:

Frequency type and range: . . VHF, 141.925 MHz
Operating voltage: + 15V±15%
Operating current: 180mA (max) at +15V


Operating Range:

Nominal 3280 ft (1000meter) range
Very heavy vegetation,
uneven terrain, or very
hard rain less than 3280 (meter)
range

Reference:

TM 3-6665-316-2

SIMULATOR, DETECTOR TICKETS, CHEMICAL AGENTS: TRAINING M256 (TRAINS)

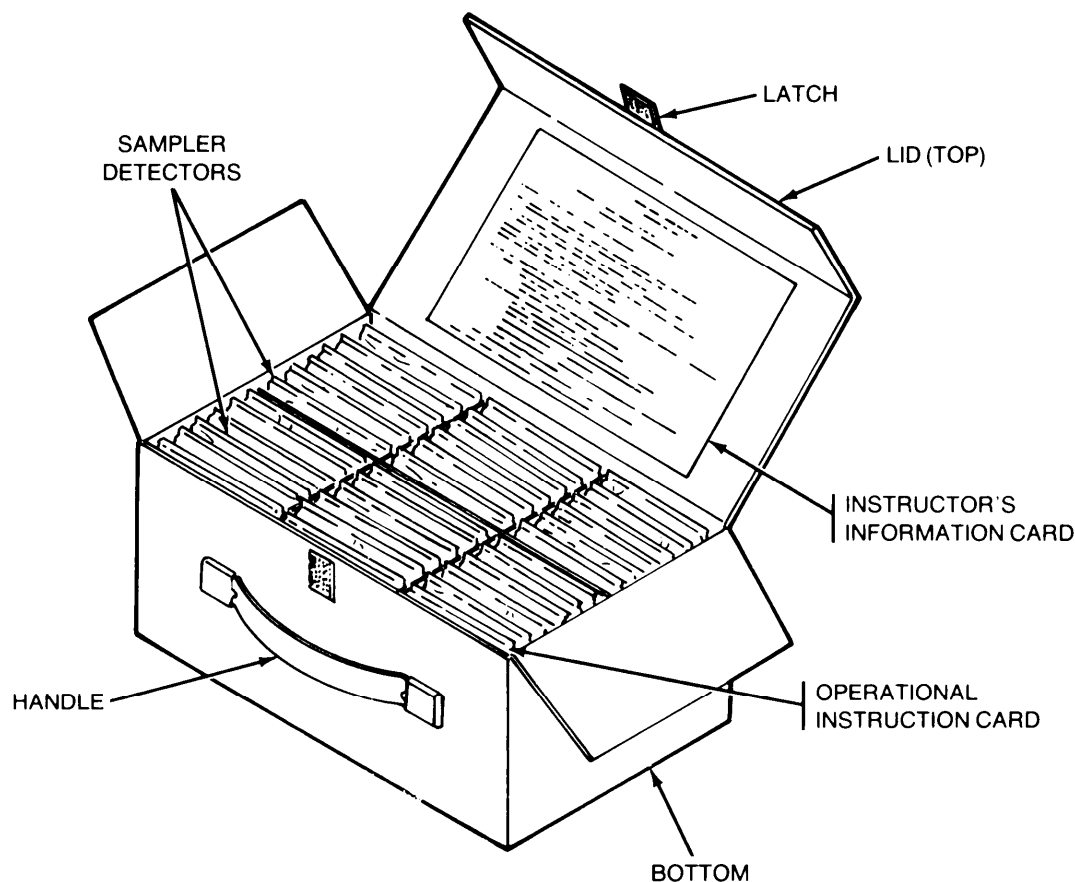*Type Classification:*

Expendable; DEVA 9/83

Use:

To train personnel in detection of chemical agent response in the absence of agent or simulant in a training environment.

Description:

The M256 Training Simulator is a portable expendable item that consists of a carrying box with handle and 36 sampler-detectors.

Functioning:

The trainee uses the hinged protective strip that contains needed ampoules for simulating of blood, blister, or nerve agents as prescribed in the appropriate operator's manual.

Limitations:

The sampler-detector is stamped "FOR TRAINING ONLY."

Tabulated Data:

NSN	6665 -01-112-1644
Unit of issue	EA
Basis of issue,	CTA 50-970
Weight	21 1/2 lb (1.135 kb)
Dimension	5 3/4 X 7 1/2 X 11 3/4 in. (13.652 cm X 19.050 cm X 29.845 cm)


Shipping and Storage Data:

Type pack	10 per wooden box
Weight	2.55 lb
Cube	.259 cu ft
Drawing number:	5-77-2550 P5-77-2550
Specification	MIL-B-117

References:

TM 3-6665-320-10

TRAINING AID, SKIN DECONTAMINATING: M58A1

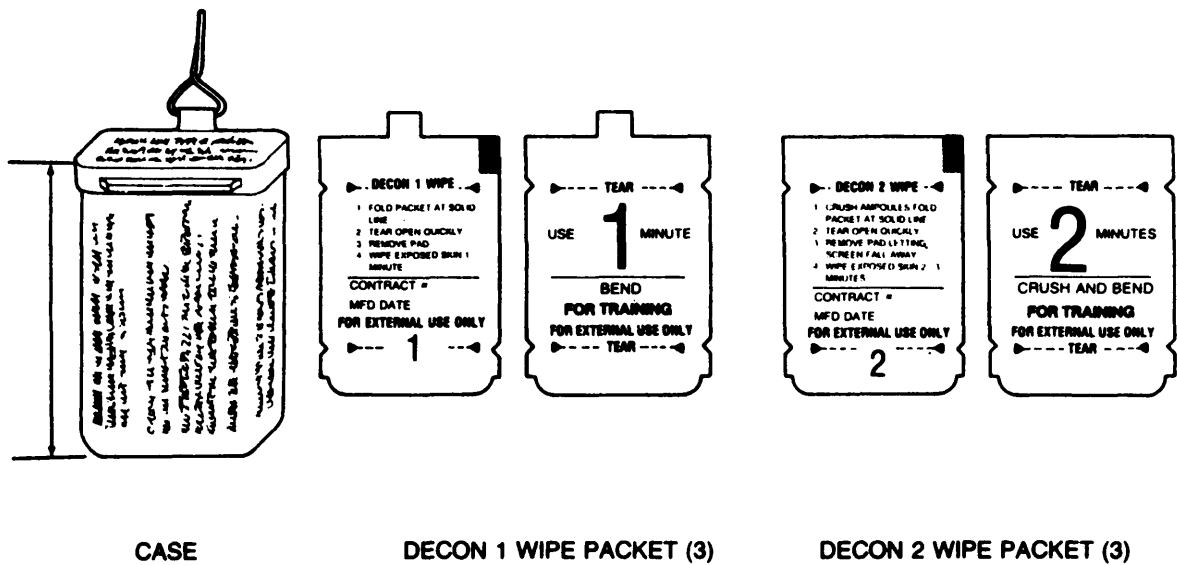

Type Classification:
Expendable; DEVA 1180

Use:
To train troops in the use of the M258A1 skin decontaminating kit:

Description:
The M58A1 skin decontaminating training aid consists of a black plastic case and six blue packets. The case is marked TRAINING AID, PERSONAL DECONTAMINATION KIT, M58A1. Three packets are marked DECON 1 WIPE. Each contains a gauze pad soaked with decontamination solution. The three other packets are marked DECON 2 WIPE. Each contains a gauze pad and glass ampoules containing simulant decontamination solution. Instructions for use are marked on the case and packets. Each packet is marked FOR TRAINING."

Functioning:
The M58A1 training aid serves as a safe substitute for training in the use of the M258A1 kit. The M58A1 simulant decontamination solutions are harmless;

whereas the decontamination solutions in the M258A1 kit are poisonous and caustic.


Tabulated Data:
NSN6910-01-101-1788
Unit of issue Each
Basis of issue CTA 50-970
Weight 3.02oz
Dimensions1.75 x 2.75 x 4.00 in.

Shipping and Storage Data:
Stability in storage Unstable at temperatures over 110°F
Type pack100 per wooden box
Weight3.2 lb
Cube 0.2 cu ft
Type storage Warehouse specification MIL-T-51489
Drawing number5-77-2387

References:
FM 21-40
FM 21-41
TM 3-4230-216-10

TRAINING SET, CHEMICAL AGENT IDENTIFICATION: SIMULANTS, M72A1 AND M72A2

TRAINING SET, CHEMICAL AGENT IDENTIFICATION, SIMULANTS, M72A2 (EXPLODED VIEW)

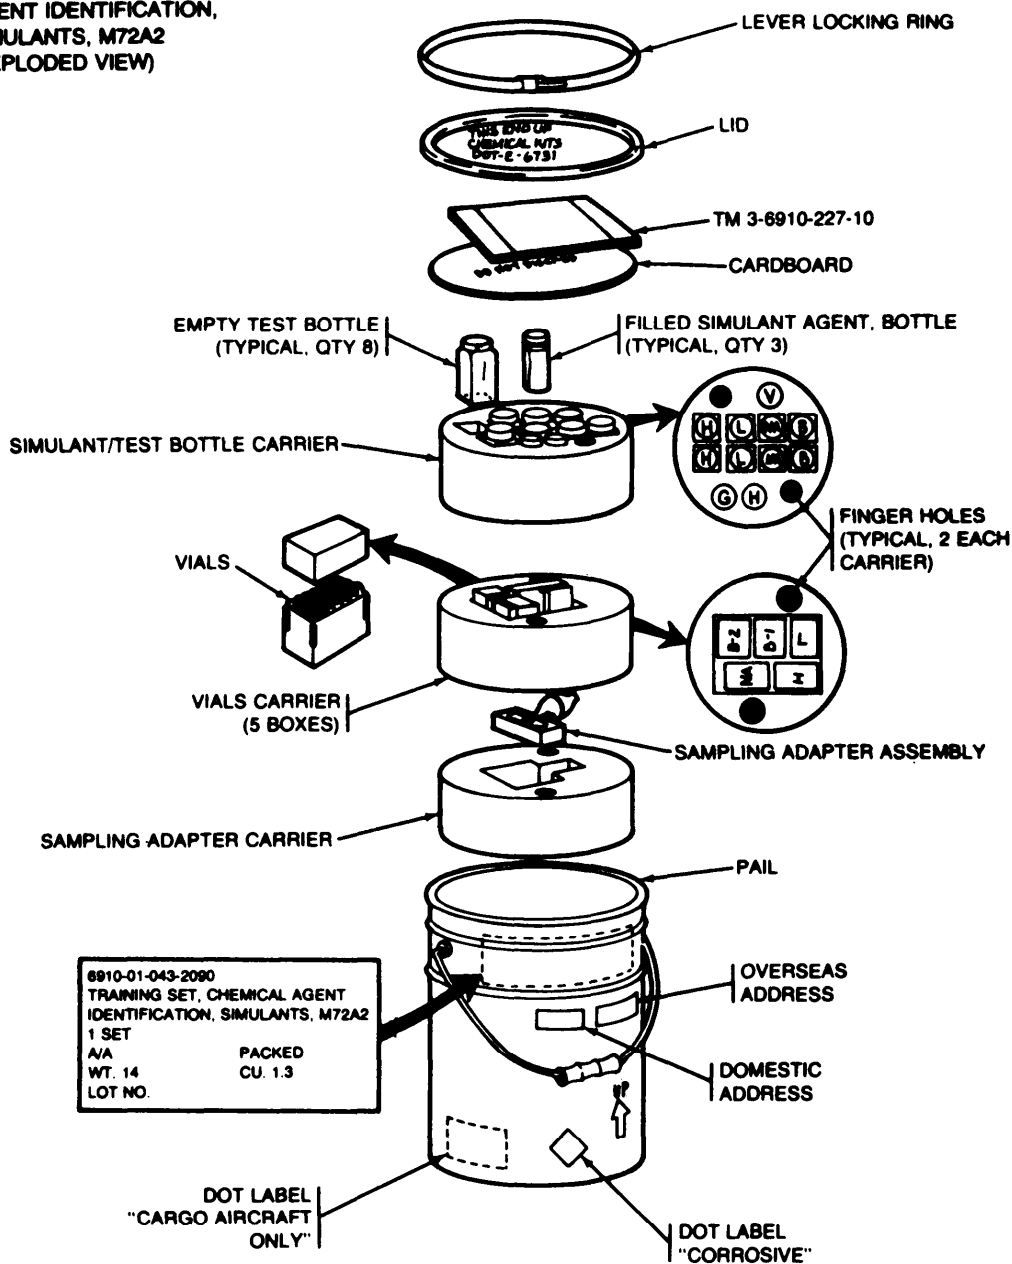

Type Classification:

Expendable; MSR 09786001 (M72A2 replaces M72A1)

Use:

To train personnel in the use of chemical agent detector kits by demonstrating the color change in detector tubes, detector tickets, detector paper, and the M256 sampler-detector when exposed to chemical agent simulante.

Description:

- a. The M72A2 simulants chemical agent identification training set consists of a 6-gallon steal pail containing three bottles of liquid agent simulants, eight empty test bottles, 250 ampoules of vapor agent simulants, and a sampling adapter assembly.
- b. The M72A1 simulants chemical agent identification training set consists of 450 vapor agent simulant vials, three bottles of liquid agent simulants, and a plastic carrying case.

Difference Between Models:

The M72A2 set can be used for training with the M256 chemical agent detector kit. The M72A1 set cannot. It does not have a sampling adapter assembly.

Functioning:

- a. The liquid agent simulants are used to demonstrate the color changes caused by liquid G, H, and V agents on M8 chemical agent detector paper.
- b. The vapor agent simulants are used to demonstrate the color changes caused by toxic chemical agent vapors on detector tickets, detector, tubes and the M256 sampler-detector.

Limitations:

Operation personnel should wear protective masks and gloves while operating the set.

Tabulated Data:

NSN:	
M72A1	6910-00-106-4800
M72A2	6910-01-043-2090
Unit of issue	Set

Basis of issue	CTA 50-970
Weight	14 lb
Height	16in.
Diameter	12 in.
Performance:	
Operating temperature	50 to 105°F
Vapor agent tests:	
Blister H	50
Blood.	50
Nerve NA	50
Lewiste L	50
Liquid agent tests:	
H	200
G	200
V	200
Shipping and Storage Data;	
Type pack	6 gallon pail
weight	14 lb
Cube	1 cu ft
DOT shipping class	Class B poison
DOT designation	Chemical kit containing class B poison, corrosive liquids and NCH hazardous articles
Drawing number:	
M72A2	5-77-2350
M72A1	5-77-2143

References:

TM 3-6665-205-10/1
TM 3-6665-205-10/2
TM 3-6665-254-12
TM 3-8665-307-10
TM 3-6910-226-10 (M72A1)
TM 3-6910-227-10 (M72A2)

APPENDIX A DELETED ITEMS

The following items were deleted from TM 43-0001-26-1, 12 May 1982, due to obsolescence, lack of Army requirement, or logistics transfer (LOG TRF) to another commodity command.

Item	Action/Date	Status
Breathing Apparatus, Oxygen Generating: M20		OBS
Calibrator, Radiac: AN/UDM-6	LOG TRF 0782	*
Calibrator, Radiac: AN/UDM-7B	LOG TRF 0782	*
Decontaminating Kit, Skin: M258	DEVA 1180	**
Hood, Chemical-Biological Mask: M6	AMCTC 951272	OBS
Laboratory, Chemical Base: M2 and M2A1	MSR 05866019	OBS
Mask, Chemical-Biological: Headwound, ABC-M18	MSR 05856009	OBS
Mask, Gas: Acid and Organic Vapors, M10		OBS
Mask, All-Purpose, MI1A1		OBS
Mask, Gas: Ammonia, M12		OBS
Protective Outfit, Toxicological: Microclimate Controlled (POTMC)		OBS
Radioactive Source Set: M3A1	LOG TRF 0782	*
Refill Kit, Training Aid, Decontaminating (for M258 training aid)	DEVA 1180	**
Resuscitation Tube, Chemical-Biological Mask: M1	MSR 3836001	OBS
Simulator, Detector Tickets, Chemical Agent: VG, M5	Ltr LEA 3 Aug84	OBS
Training Aid, Skin Decontaminating: M58	DEVA1180	**
Vesicant Agent Protective Ointment: M5	AMC APPVL89	OBS
Water Testing Kit, Chemical Agents: M2	DEVA 1083	**

*Reassigned to US Army Electronics Command by letter, DRSEL, 5 Jul 82.

**CTA 50-970 expendable items deleted by DEVA (Development Acceptance In-Process Review) as obsolescent. Items to be replaced when replacement items become available.

GLOSSARY

G-1. Type Classification and Logistics Control Codes (LCC).

When applicable, items with the following type-classifications and logistics control codes are included in this manual:

- a. *Standard (L-CC-A)*. A combat acceptable item which will fill an operational requirement and is authorized for production to fill shortages.
- b. *Standard (LCC-B)*. A satisfactory item for filling an operational requirement but which is being or has been replaced by a newer generation or series of items.
- c. *Contingency (LCC-F)*. A mission essential contingency item.
- d. *Contingency (LCC-S)*. A contingency-training item.
- e. *Untied Procurement (LCC-T)*. A limited procurement-test item.
- f. *Limited Procurement (LCC-U)*. A limited procurement-urgent item.
- g. *Test, Measurement, and Diagnostic Equipment (LCC-N)*.

G-2. Expendable Items. Expendable items, except ammunition and selected high density military type items, do not require type classification. All such items are listed in CTA 50-970 and can be obtained through normal supply channels for expendable.

G-3. Key to Abbreviations and Symbols.

- a. Abbreviations. The abbreviations used in this manual are listed and explained below.

	Explanation
ABC	American-British-Canadian
AEC	Atomic Energy Commission, now Nuclear Regulatory Commission
AMCTC	Army Materiel Command Technical Committee

	Explanation
AN	Army-Navy
APC	Armored personnel carrier
CB	Chemical-biological
CBR	Chemical-biological-radiological (See NBC)
CCTC	Chemical Corps Technical Committee
CFM	Cubic feet per minute
CON	Contingency
CPE	Collective protection equipment
Cu FT	cubic feet
CWTC	Chemical Warfare Technical Committee
DECON	Decontamination
DEVA	Development acceptance
DODAC	Department of Defense ammunition code
DOP	di-octyl-phthalate
DOT	Department of Transportation
LCC	Logistics control code
LOG TRF	Logis transfer
LP	Limited procurement
MSR	Materiel status record
NBC	Nuclear-biological-chemical
NOIBN	Not otherwise indicated by name
NOS	Not otherwise specified
NRC	Nuclear Regulatory Commission (formerly Atomic Energy Commission)
NSN	National stock number
OBS	Obsolete
POTMC	Protective outfit toxicological microclimate controlled
STB	Supertropical bleach
STD	Standard
TAP	Toxicological agent protective
TMDE	Test, measurement, and diagnostic equipment

b. *Chemical Agent Symbols.* The chemical agent symbols used in this manual are listed and identified below. Chemical agents are usually classified by their main physiological action, i.e., type agent. For

additional information on the properties of chemical agents, refer FM 3-9, Military Chemistry and Chemical compounds.

Symbol	Type Agent	Name
AC	Blood agent	Hydrogen cyanide
BZ	Incapacitating agent	3-QuinnclidinyI benzilate
CG	Choking agent	Phosgene
CK	Blood agent	Cyanogen chloride
CX	Blister agent	Phosgene oxime
DA	Vomiting agent	Diphenylchlorarsine
DC	Vomiting agent	Diphenylkyanoarsine
DM	Vomiting agent	Adamsite
DP	Choking agent	Diphosgene
ED	Blister agent	Ethylchloroarsine
GA	Nerve agent	Tabun
GB	Nerve agent	Sarin
GD	Nerve agent	Soman
HD	Blister agent	Mustard
HL	Blister agent (a mixture of HD and L)	Mustard and Lewisite
HN	Blister agent	Nitrogen mustard
HT	Blister agent	Mustard technical mixture
L	Blister agent	Lewisite
MD	Blister agent	Methylchloroarsine
PD	Blister agent	Phenyldichlorarsine
SA	Blood agent	Arsine
V-G	V or G-type nerve agent	
VGH	V or G-type nerve agent or H-type blister agent	
VX	Nerve agent	Very toxic, persistent unnamed nerve agent

c. *Electronic Equipment.* Indicator letters for items coded in accordance with the Joint Electronic Type Designator System are listed and identified below.

Code	1st Letter (Designated Installation Classes)	2d Letter (Type of Equipment)	3d Letter (Purpose)
GSG	General ground use	Special type	Fire control directing
PDR	Portable	Radiac	Passive detecting
TSQ	Ground transportable	Special type	Combination
UDM	General utility	Radial	Maintenance and test assembly

INDEX

	Page		Page
Abbreviations and Symbols	Glossary 1	Collective Protection Equipment, REGENCY NET	3-4.9
Adapter and Valve Assembly, Compressed Air: M4	2-3	Collective Protection Equipment TACFIRE UCE	3-4.11
Adapter, Oxygen Supply, CB Mask, Aircraft: ABC-M8	2-5	Collective Protection Equipment, TRAILBLAZER	3-4.13
Alarm, Chemical Agent, Automatic: Portable Manpack, M8 and M8A1	1-3	Control Module	3-4.15
Alarm Unit, Chemical Agent Automatic Alarm: M42	1-5	Converter, Frequency, Static: M5	3-4.17
Area Predictor, Radiological Fallout: M5A2	5-3	Cooling Shroud and Fan	3-4.19
Bag, Waterproof, Chemical-Biological Mask: M1	2-7	Crimping Outfit, Hydraulic, Voicemitter-Outlet Valve Assembly: ABC-M1	7-5
Bag, Waterproof, Chemical-Biological Mask: M1A1	2-7	Decontaminating Agent: DS2	4-3
Breathing Apparatus Compressed Air: M15	2-9	Decontaminating and Reimpreg- nating Kit: Individual, ABC-M13,	4-5
Breathing Apparatus, Self-Contained: M23 and M23A1	2-13	Decontaminating Apparatus, Portable: DS2, 1 1/2-Quart, ABC-M11	4-7
Calculator, Downwind Toxic Vapor Hazard: Line Source, ABC-M3	5-5	Decontaminating Apparatus: Power- Driven, Lightweight, M17	4-8.5
Calculator, Downwind Toxic Vapor Hazard: Point Source, 4BC-M2	5-7	Decontaminating Apparatus: Power- Driven, Portable, Type A/E32U-8	4-8.3
Calculator, Nuclear Yield: ABC-M4A1	5-9	Decontaminating Apparatus: Portable, 14 Liter, M13	4-8.1
Calculator, Radiac: ABC-M1A1	5-9	Decontaminating Apparatus: Power-Driven, Skid-Mounted: Multipurpose, Nonintegral, 500-Gallon, ABC-M12A1	4-9
Calculator, Set, Radiac and Nuclear Yield: ABC-M28A1	5-9	Decontaminating Kit, Skin: M258A1	4-11
Calibrator, Radiac: TS-1230A	6-5	Decontaminating Kit, Skin: M291	4-12.1
Calibrator Set, Radiac: AN/UDM-1	6-3	Decontamination Kit, Individual Equipment: M280	4-10.1
Calibrator Set, Radiac: AN/UDM-1A	6-3	Deleted Items	A-1
Canister, Particulate: M14	7-3	Detector Kit, Carbon Monoxide, Calorimetric: M23	1-7
Chemical Agent Monitor System (CAM)	4-16.1	Detector Kit, Chemical Agent: ABC-M18A2	1-9
Chemical Agent Symbols	Glossary 2	Detector Kit, Chemical Agent: M256	1-11
Collective Protection Equipment CBR: Battery Control Central, Hawk M10	3-3	Detector Kit, Chemical Agent: M256A1	1-12.1
Collective Protection Equipment, GUARDRAIL	3-4.1	Detector Unit, Chemical Agent Automatic Alarm: M43	1-3
Collective Protection Equipment, Guided Missile System, I-HAWK	3-4.3	Electronic Equipment Indicator Letters	Glossary 2
Collective Protection Equipment, Guided Missile System, PATRIOT	3-4.5	Entrance, Protective, Pressurized: Collapsible, M10 (TACFIRE)	3-5
Collective Protection Equipment, NIKE-HERCULES: M11, M12, M13	3-4.7	Entrance, Protective, Pressurized Collapsible: M12 (AN/TSQ-73)	3-5
Collective Protection Equipment in Support of AN/GSG-10(V) Artillery Fire Direction Center	3-5; 3-7	Entrance, Protective, Pressured Collapsible: M13, M15, M16	3-6.3
Collective Protection Equipment in support of AN/TSQ-73	3-5; 3-7	Entrance, Protective, Pressurized Collapsible: M14	3-6.5
Collective Protection Equipment, NBC: M20 Simplified	3-6.1		

	Page
Entrance, Protective, Pressurized:	
M7	3-3
Expendable items	Glossary 1
Filter Element Set, Chemical	
Biological Mask: M13A2	2-15
Filter Unit, Gas-Particulate: Armored	
Ambulance, Six-Man, 12 CFM M14	3-9
Filter Unit, Gas-Particulate, 200 CFM,	
208 V, M84	3-8.1
Filter Unit, Gas-Particulate, 400 CFM,	
208 V, 400 Hz, M59	3-8.3
Filter Unit, Gas-Particulate, 400 CFM,	
208 V, 400 Hz, M87	3-8.5
Filter Unit, Gas-Particulate: Gas	
Engine Driven, 300 CFM, ABC-M6A1	3-11
Filter Unit, Gas-Particulate: Hospital,	
Six-Man, 12 CFM, ABC- M7A1	3-13
Filter Unit, Gas-Particulate: Tank, 12	
CFM, M8A2	3-17
Filter Unit, Gas-Particulate: Tank, 12	
CFM, M8A3	3-17
Filter Unit, Gas-Particulate: Tank, 20	
CFM, M13 and M13A1	3-15
Filter Unit Gas-Particulate: 200 CFM,	
208 V, 400 Hz, M58	3-7
Heater, Air, Electrical, Filter Unit: M3	3-15
Heater Water, Liquid Fuel: Ma	4-9
Hood, Chemical-Biological Mask:	
Aircraft, ABC-M7	2-17
Hood, Chemical-Biological Mask:	
Field, ABC M6A2	2-19
Hood, Chemical-Biological Mask:	
Tank, ABC-MS	2-21
Impregnating Set, Clothing: Field,	
M3	4-13
Indicator, Outlet Valve Leakage:	
M4A1	7-7
Installation kit CBR, Collective Pro-	
tection Equipment: AN/TSQ-73;	
M263	3-6; 3-7
Installation Kit, Collective Protection	
Equipment: TACFIRE, M282	3-5; 3-7
Maintenance Kit, CBR Equipment:	
Detector, Alarm, M273.	7-8.1
Marking Contamination: Nuclear,	
Biological, Chemical (NBC)	1-14.1
Mask, Chemical-Biological: Aircraft	
ABC-M24	2-23
Mask, Chemical-Biological: Aircraft,	
.....	2-24.1
Mask, Chemical-W-Biological: combat,	
Vehicle, M42	2-24.3

	Page
Mask, Chemical-Biological: Field,	
ABC-M17	2-25
Mask, Chemical-Biological: Field,	
M17A1	2-25
Mask, Chemical-Biological: Field,	
M17A2	2-25
Mask, Chemical-Biological: Field,	
M40	2-27
Mask, Chemical-Biological: Special	
purpose, M9	2-29
Mask, Chemical-Biological: Special	
Purpose, M9A1	2-29
Mask, Chemical-Biological: Tank,	
M25	2-31
Mounting Kit, Chemical Agent	
Automatic Alarm: High Profile,	
M226	1-3
Mounting Kit, Chemical Agent	
Automatic Alarm: Low Profile, M182	1-3
Paper, Chemical Agent Detector: M9	1-16.1
Paper, Chemical Agent Detector:	
VGH, ABC-M8	1-15
Power Supply, Chemical Agent,	
Automatic Alarm: M10 and M10A1	1-17
Precleaned and Particulate Filter	
Assembly, M1A1 -19	3-15
Purifier, Air M2A1, M2A2 and	
M1A1 -19 Precleaned and Particulate	
Fitter Assembly	3-18.1
Purifier, Air, M2A1	3-17
Purifier, Air, M2A2	3-17
Purpose	ii
Refill Kit, Analyzing Components,	
CBR Agents Sampling and	
Analyzing Kit: M33	1-19
Refill Kit, Chemical Agent Automatic	
Alarm: M229	1-21
Refill Kit, Chemical Agent Detector:	
VG Components, ABC-M30A1	1-23
Refill Kit, Training Aid, Skin Decon-	
taminating (for M58A1 Training Aid)	8-3
Safety Equipment Set, Respiratory	
Two-Man Gasoline Tank	
Cleaning	3-19
Sampling and Analyzing Kit, CBR	
Agent: M19	1-25
Sampling Kit, CBR Agent: M34	1-27
Shelter System, Collective Protection,	
Chemical-Biological: Inflatable,	
Trailer-Transported, M51	3-21
Simplified Collective Protection	
Equipment (SCPE) Type M20	3-6.1

	Page
Simulator, Detector Tickets, Chemical Agent: Training M256 (TRAINS)	8-6.3
Simulator, Detector Unit, Chemical Agent Automatic Alarm M81	8-6.1
Tester, Airflow, Gas-Particulate Fitter Unit: M39	7-9
Tester, Leakage, Protective Mask: DOP, M14	7-11
Testing Kit Impregnate in Clothing: ABC-M2	4-15
Test Kit, Leakage, Chemical- Biological Air Filter: M257	7-12.1
Test Set, Chemical Agent Automatic Alarm: M74	7-13
Test Set, Chemical Agent Automatic Alarm: M140	7-15
Training Aid, Skin Decontaminating: M58A1	8-7

	Page
Training Set, Chemical Agent Identification: Simulants, M72A1	8-9
Training Set, Chemical Agent Identification: Simulants, M72A2	8-9
Type-Classification and Logistics Control Codes (LCC)	Glossary 1
Water Testing Kit, Chemical Agents: M272	1-29
Winterization Kit, Automatic Chemical Agent Alarm: M253.	1-31
Winterization Kit, Chemical-Biological Mask: M1	2-41
Winterization Kit, Chemical-Biological Mask: M3	2-43
Winterization Kit, Chemical-Biological Mask: M4	2-45

By Order of the Secretary of the Army

Official:

ROBERT M. JOYCE
Brigadier General, United States Army
The Adjutant General

E. C. MEYER
General, United States Army
Chief of Staff

DISTRIBUTION:

To be distributed in accordance with DA Form 12-28, General Information applicable to all Organizations that have a chemical mission



THEN...JOT DOWN THE
DOPE ABOUT IT ON THIS
FORM, CAREFULLY TEAR
IT OUT, FOLD IT AND DROP
IT IN THE MAIL!

SOMETHING WRONG WITH THIS PUBLICATION?

FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS)

Your mailing address

DATE SENT

Date you filled out this form

PUBLICATION NUMBER

TM 43-0001-26-1

PUBLICATION DATE

October 1981

PUBLICATION TITLE

Army Equipment Data Sheets,
Chemical Defense Equipment

BE EXACT...PIN-POINT WHERE IT IS

PAGE
NO.PARA-
GRAPHFIGURE
NO.TABLE
NO.

1-3; 1A

IN THIS SPACE TELL WHAT IS WRONG
AND WHAT SHOULD BE DONE ABOUT IT:

THE AUTOMATIC CHEMICAL AGENT ALARM HAS
BEEN RECONFIGURED.

DELETE DATA FOR M10 THROUGH M18 ALARMS.

REASON: M5R02816012 DELETES M10
THROUGH M18 ALARM CONFIGURATIONS.

NOTE TO THE READER:

Your comments will go directly to the writer responsible for this manual, who will prepare the reply that is returned to you. To help the evaluation of your recommendations, please explain the reason for each of your recommendations, unless the reason is obvious.

All comments will be appreciated, and will be given immediate attention. Handwritten comments are acceptable.

For your convenience, blank "tear out" forms, preprinted, addressed, and ready to mail, are included in this manual.

SAMPLE

PRINTED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER

John Smith, MSG. AV 793-XXXX

SIGN HERE

John Smith

DA FORM 2028-2
1 JUL 79PREVIOUS EDITIONS
ARE OBSOLETE.P.S. --IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR
RECOMMENDATION MAKE A CARBON COPY OF THIS
AND GIVE IT TO YOUR HEADQUARTERS.

TEAR ALONG DOTTED LINE

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS



THEN...JOT DOWN THE
DOPE ABOUT IT ONE THIS
FORM, CAREFULLY TEAR
IT OUT, FOLD IT AND DROP
IT IN THE MAIL!

SOMETHING WRONG WITH THIS PUBLICATION?

FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS)

DATE SENT

PUBLICATION NUMBER

TM 43-0001-26-1

PUBLICATION DATE

October 1981

PUBLICATION TITLE

Army Equipment Data Sheets,
Chemical Defense Equipment

BE EXACT...PIN-POINT WHERE IT IS

PAGE
NO.

PARA-
GRAPH

FIGURE
NO.

TABLE
NO.

IN THIS SPACE TELL WHAT IS WRONG
AND WHAT SHOULD BE DONE ABOUT IT:

TEAR ALONG DOTTED LINE

PRINTED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER

SIGN HERE

DA FORM 1 JUL 79 2028-2

PREVIOUS EDITIONS
ARE OBSOLETE.

P.S. --IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR
RECOMMENDATION MAKE A CARBON COPY OF THIS
AND GIVE IT TO YOUR HEADQUARTERS.

FILL IN YOUR
UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

TEAR ALONG DOTTED LINE

Commander
US Army Armament, Munitions and Chemical Command
ATTN: AMSMC-MAR-T (A)
Aberdeen Proving Ground, MD 21010-5423

THE METRIC SYSTEM AND EQUIVALENTS

LENGTH MEASURE

1 Centimeter = 10 Millimeters = 0.01 Meters = 0.3937 Inches
 1 Meter = 100 Centimeters = 1000 Millimeters = 39.37 Inches
 1 Kilometer = 1000 Meters = 0.621 Miles

WEIGHTS

1 Gram = 0.001 Kilograms = 1000 Milligrams = 0.035 Ounces
 1 Kilogram = 1000 Grams = 2.2 lb.
 1 Metric Ton = 1000 Kilograms = 1 Megagram = 1.1 Short Tons

LIQUID MEASURE

1 Milliliter = 0.001 Liters = 0.0338 Fluid Ounces
 1 Liter = 1000 Milliliters = 33.82 Fluid Ounces

SQUARE MEASURE

1 Sq. Centimeter = 100 Sq. Millimeters = 0.155 Sq. Inches
 1 Sq. Meter = 10,000 Sq. Centimeters = 10.76 Sq. Feet
 1 Sq. Kilometer = 1,000,000 Sq. Meters = 0.386 Sq. Miles

CUBIC MEASURE

1 Cu. Centimeter = 1000 Cu. Millimeters = 0.06 Cu. Inches
 1 Cu. Meter = 1,000,000 Cu. Centimeters = 35.31 Cu. Feet


TEMPERATURE

$5/9(^{\circ}\text{F} - 32) = ^{\circ}\text{C}$
 212° Fahrenheit is equivalent to 100° Celsius
 90° Fahrenheit is equivalent to 32.2° Celsius
 32° Fahrenheit is equivalent to 0° Celsius
 $9/5^{\circ}\text{C} + 32 = ^{\circ}\text{F}$

APPROXIMATE CONVERSION FACTORS

TO CHANGE	TO	MULTIPLY BY
Inches	Centimeters	2.540
Feet	Meters	0.305
Yards	Meters	0.914
Miles	Kilometers	1.609
Square Inches	Square Centimeters	6.451
Square Feet	Square Meters	0.093
Square Yards	Square Meters	0.836
Square Miles	Square Kilometers	2.590
Acres	Square Hectometers	0.405
Cubic Feet	Cubic Meters	0.028
Cubic Yards	Cubic Meters	0.765
Fluid Ounces	Milliliters	29.573
its	Liters	0.473
arts	Liters	0.946
allons	Liters	3.785
Ounces	Grams	28.349
Pounds	Kilograms	0.454
Short Tons	Metric Tons	0.907
Pound-Feet	Newton-Meters	1.356
Pounds per Square Inch	Kilopascals	6.895
Miles per Gallon	Kilometers per Liter	0.425
Miles per Hour	Kilometers per Hour	1.609

TO CHANGE	TO	MULTIPLY BY
Centimeters	Inches	0.394
Meters	Feet	3.280
Meters	Yards	1.094
Kilometers	Miles	0.621
Square Centimeters	Square Inches	0.155
Square Meters	Square Feet	10.764
Square Meters	Square Yards	1.196
Square Kilometers	Square Miles	0.386
Square Hectometers	Acres	2.471
Cubic Meters	Cubic Feet	35.315
Cubic Meters	Cubic Yards	1.308
Milliliters	Fluid Ounces	0.034
Liters	Pints	2.113
Liters	Quarts	1.057
ers	Gallons	0.264
ms	Ounces	0.035
ograms	Pounds	2.205
Metric Tons	Short Tons	1.102
Newton-Meters	Pounds-Feet	0.738
Kilopascals	Pounds per Square Inch	0.145
ometers per Liter	Miles per Gallon	2.354
ometers per Hour	Miles per Hour	0.621

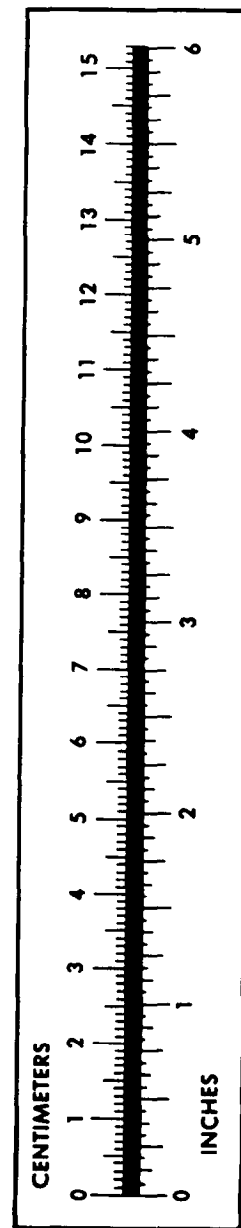

PIN: 050910-004